

# Mounting instruction

## ECOFLEX® 15, ECOFLEX® 15 PLUS

N-Connector, solderless / Art. Nr.: 7395 PRO



### Required tools :


- 2 x open-ended spanner 19 mm
- 1 x Cutter knife
- 1 x scissors
- 1 x metall saw
- 1 x small file



Move the nut, clamping ring and rubber washer over the cable tail.  
Hint: With a bit of Vaseline the rubber washer can be moved easily over the cable sheath.



Bend copper braid upwards right-angled. Insert contact sleeve between copper foil and braid until stop. Cut off protruding braid. Move the rubber seal to the front, up to the contact sleeve.

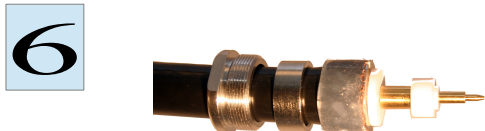

Push Teflon-Isolator-Disc over the inner conductor. Put the inner pin on the inner conductor. Put on the Teflon-Isolator.



1 Cut off cable tail right-angled with a small metall saw. The inner conductor has to be kept absolutely round.



3 Remove 9 mm of the outer sheath with a knife.



5 Remove the copper foil and the dielectric with a knife. The inner conductor must stay absolutely round. Remove burr from sharp edges.



7 The prepared cable tail has to be inserted into the housing until stop. Tighten the clamping nut finger tight with two open-ended spanners 19 mm. A small split should remain visible between clamping nut and connector housing.