

Jecod®

AF Series Auto Fish Feeder

USER'S MANUAL

Warning:


1. To ensure personal safety, children or people without the ability to identify danger are prohibited from using the device.
2. Do not disassemble the device to avoid damage.
3. Do not let children play with this product.
4. The battery should be pulled out, if the device will be idle for long time.

Please subject to the actual products due to technology upgrade.

I. Introduction

AF series feeder is under IC smart control, which can manually set feeding time and quantity. Suitable for fish tanks of different sizes. It can meet the daily needs of aquarium enthusiasts for feeding fish. In order to use this product correctly, please read and understand the instructions carefully before installation and use.

II. Control Panel

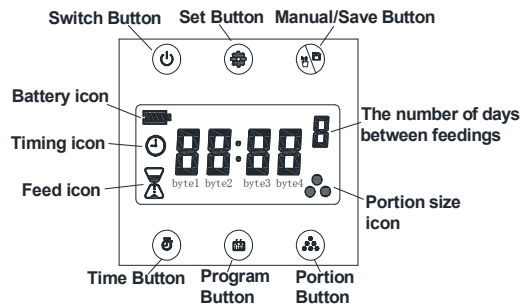


Product Features

1. Built-in 3 AA batteries (rechargeable), no external power supply (AA batteries need to be purchased by the user).
2. Daily feeding time can be set.
3. Feeder can be set to synchronize with the local time.
4. Auto fish feeding on time, up to 6 feeding times per day, set the daily feeding time for each meal.

5. Food quantity of per feeding can be set freely (No.1-No.9), maximum up to 9 times
6. Small size and multi-function.
7. LCD display to display time and feeding parameters.
8. The capacity of the installed extension hopper can reach 250ml or even 500ml.
9. Easy to fill the food.
10. This product is suitable for granulates up to 3 mm.

III. Installation & Accessories

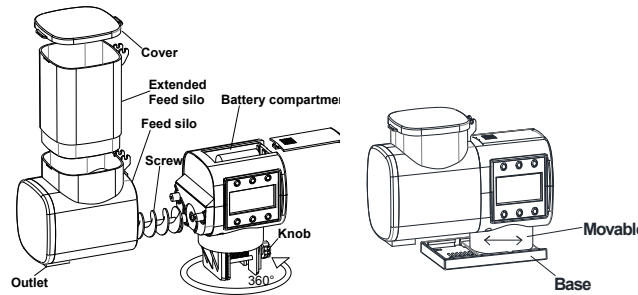

1. Installation Instructions:

- 1) Installation:
 - ① Install the bracket, and install the adjustment knob to the edge of the aquarium. The maximum glass thickness is 15mm.
 - ② Install the base on the platform through the suction cup.

2. Replacement Instructions:

- 1) Accessories include: base, feeding ring, sucker, 3 AA batteries.
- 2) The extended hopper can be dismantled. If there is no need to the extended hopper, the upper cover can also be disassembled and installed on the hopper.
- 3) To replace the battery, you need to disassemble the battery compartment (only the AA battery can be replaced).
- 4) To add feed, open the top cover of the hopper and pour in the feed.

IV. Factory Settings

Number of meals	Feeding time	Volume (Servings/meal)
1	8:00	2
2	20:00	2
-	-	-

Explain: "-" is unset;

Running time is 2 seconds per serving.

V. Functional Configuration

1. Memory function: No need to reset parameters after each power failure.
2. Operation keys: Set parameters according to **II. Control Panel**.
3. The Feed icon is displayed when manual feeding or auto feeding is on.
4. Power display: Displays the current battery.

VI. Control Process




Main interface (Standby state)

1. Feeding starts when it comes to the preset feeding time.
2. The main screen shows the next feeding time, current battery, and the charging status (as shown in the picture above).





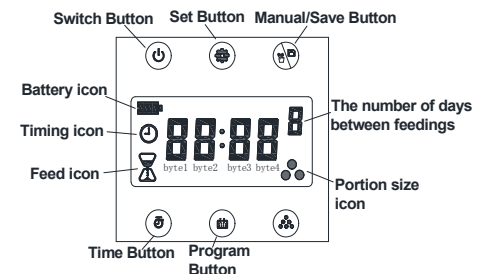

VII. Operation Settings

1. Time Setting




Time diagram

Clock Setting:

- ① Press “”, and then press “”, to enter the time setting interface.
- ② Press “” to set hours and “” to set minutes;
- ③ After setting, press “” to save and exit to the main interface.
- ④ Press “” once in normal mode to check the set time.






2. Feeding Time Setting

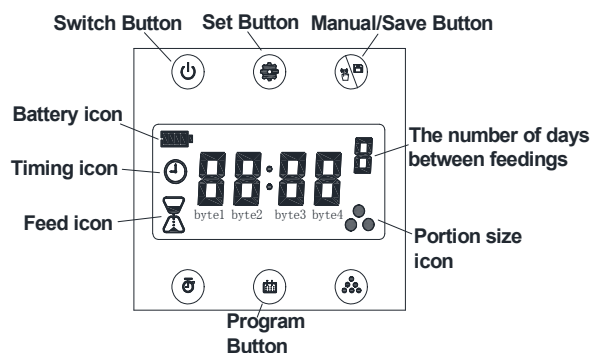

Feeding time diagram

Press “” to view the feeding times

Steps:


- ① Press “” to enter the feeding time setting interface;
- ② Press “” to set the feeding time for the first meal, four digits flash (“- -” indicates no feeding).
- ③ Press “” to set hour, then press “” to set the next meal.
- ④ After setting, press “” to save.

Notice: ① Feeding time is on the hour.

② Up to 6 times can be set.

③ Please set feeding time clockwise.





3. Feeding Portion Setting

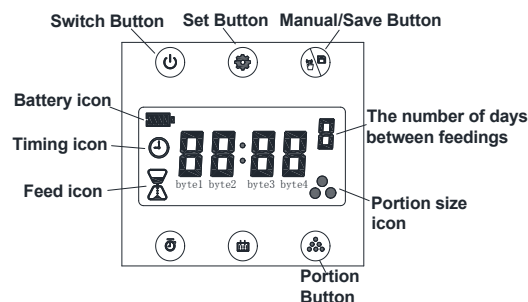

Feeding portion diagram


Press “” to check feeding portions

Portion Setting Per Meal:

- ① Press “” to check the servings per meal, when four digits flash. Then press “” to reset if necessary.
- ② Press “” to adjust feeding quantity, maximum 9 portions and then press “” to the next meal.
- ③ After setting, press “Manual/Save” to save and exit.



Explain: Each feeding portion is 2 seconds.

4. Manual Feeding

Press “” to manual feeding in standby mode, 2 seconds running time.

For only one meal each day, the interface displays “- -” and lasts for one hour after feeding, to indicate that feeding is done today.

5. Feeding Interval Setting


Press “” for 3 seconds, “the number of days between feeding” flashes. Press “” each time, it increases 1 unit. The default is “0”, and the interval is “7” days at most.

VIII. Maintenance

1. This product is suitable for indoor use. Do not soak in water.
2. Please clean up the canister before changing feed, to avoid food sticking to the bolt due to moisture.
3. Clean the canister and bolt regularly, and keep them dry to prevent the feed from agglomerating at least once a month.
4. Do not flush the canister with water.

5. Do not touch buttons with wet hands.

Steps To Dismantle The Bolt:



- ① Remove the front cover
- ② Remove two screws
- ③ Remove the canister
- ④ Take out the bolt

IX. Troubleshooting

Trouble	Reason	Solution
No display on control panel	Low battery	Replace battery
	Loosen internal connecting cable	Open the battery compartment to reattach
	The switch is off	Turn on the switch
Display but no response	The screw is stuck	Clean the bolt
The impeller rotates but no feed	Feed agglomeration	Smash the feed



DISPOSAL:

Do not dispose this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary. This product must not be disposed together with the domestic waste. This product has to be disposed at an authorized place for recycling of electrical and electronic appliances. By collecting and recycling waste, you help save natural resources, and make sure the product is disposed in an environmentally friendly and healthy way.

Jebao Co., Ltd.

Add: Tongmao Industrial Park, Xiaolan, Zhongshan, Guangdong, China

Tel: +86-760-28136708, 28136720

E-mail: info@jebao.com Website: <http://www.jebao.com>