


# LTECH 2CH Double-control Switch Panel

K2RF



VK  
(Optional accessories)



Gateway



APP

A gateway is needed to realize this function

FC CE RoHS

warranty  
5 years



## Technical Specs:

K2RF 2CH Double-control Switch Panel


Wireless Frequency: 433MHz  
 Input Voltage: 200~240Vac, 50Hz  
 Max Load Power: 500W (LED 150W)/CH  
 Min Load Power: 5W/CH  
 Working Temp.: -30°C~55°C  
 Package Size: L113×W112×H50(mm)  
 Weight[G.W.]: 230g

VK Remote


Remote Option: 4 zones control  
 Working Voltage: 3Vdc (battery CR2032)  
 Wireless Frequency: 433MHz  
 Working Temp.: -20°C~55°C  
 Package Size: L150×W46×H18(mm)  
 Weight[G.W.]: 85g

\* Load Type: LED lamps / Incandescent lamps / Fluorescent lamps / Energy-saving lamps

## Installation Instruction:

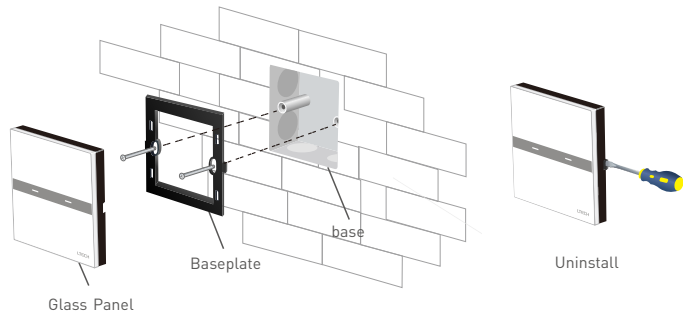


## Function:



1CH 2CH  
On/Off Key


## Product Size:

Unit: mm

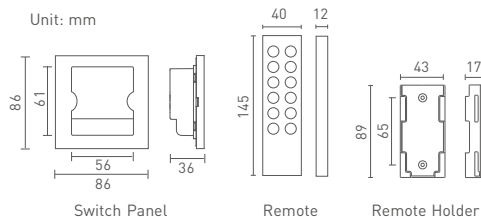


## Wiring Diagram


Single K2RF switch panel connect to lamp.

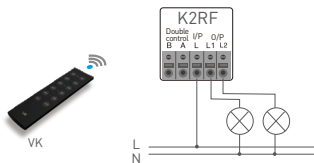


Double-control (VK can only match up with one panel).

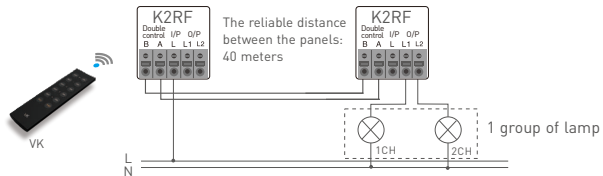

Multiple panels controlling multiple channels of lamps (VK can only match up with one panel).

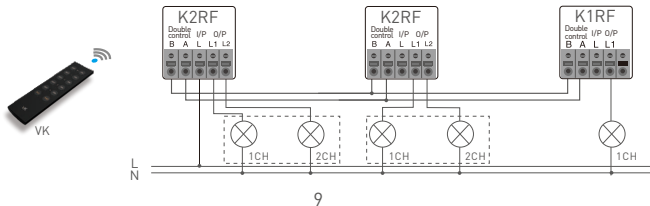

Replace the double-control switch of traditional family.

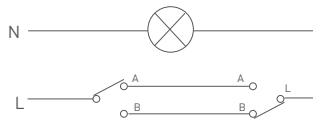

## Introduction of multi-control switch panel:

Double-control switch panel with double control function only when they have been matched, please turn on the lamp if you do the following steps.

Match code:



Long press "On/Off" key on panel ① for about 3s, the buzzer beeps once, the indicator light flickers.

Then press any "On/Off" key on panel ②, match successfully

Clear code:



Long press "On/Off" key on panel for about 10s, the buzzer long beep twice, the indicator light flicker twice, deactivate the matching successfully

## Attention:

1. Live line can be wired to any panel if 2 or 3 double-control switch panel work together.
2. The lamps can be connected to any switch panel.
3. Please make sure that A connected with A, B with B for double-control wiring.
4. Double-control switch panel works only when they have been matched.

## Operating Instruction for Remote:



Match code between remote and receiver

\* please turn on the lamp if you do the following steps.


Match code:




1. Press 1CH "On/Off" key on switch panel for about 3s, the buzzer beeps once, the indicator light flickers.



2. Then press the matching zone key on remote, 1CH match successfully.



3. Press 2CH "On/Off" key on switch panel for about 3s, the buzzer beeps once, the indicator light flickers



4. Then press the matching zone key on remote, 2CH match successfully.

Clear code:



Long press "On/Off" key on panel for about 10s, the buzzer long beep twice, the indicator light flicker twice, deactivate the matching successfully

Attn: One panel can be matched with max 10 remotes.


## Panel match up with APP:

1. Scan QR Code to download and install APP via mobile phone, then match up with gateway.



iOS / Android

2. Enter gateway interface, add K2RF panel following prompts.

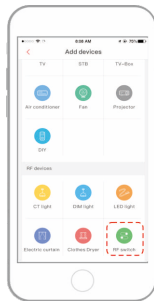

3. Panel match up with APP: connecting panel and lamps, then turn on lamps. Long press switch for 3s until indicator light flicker, click "match" now, match successfully.