

PRAXAS TLX2 CARGO COVER





TLX2 Cargo Covers provide excellent protection against:

- Temperature excursions by protecting your products from solar radiation and extreme ambient temperatures, The brilliant white surface is the most effective solution against direct sunlight conditions.
- Prevents damage caused by rain, snow and insects.
- Harmful gases and vapours, condensation damage. TLX2 is breathable and waterproof; it allows gases and vapours to pass through the product removing the risk of condensation and other hazards inside the pallet.
- Theft or tampering by offering an effective first defence to your shipments.

— YOUR BENEFITS

Recyclable: TLX2 can be recycled, store and take to your local recycling

Stops temperature excursions on the tarmac

Protects your goods from temperature excursions, theft, rain, snow, frost, humidity Easy to use 1mm thick lightweight breathable covers install or remove quickly and easily The cost price of a cover amounts to approximately 1% of the value of a pallet. Through its application, wastage is reduced by many percentages.

Gives short-wave solar radiation protection to temperature-sensitive goods when exposed to direct sunlight conditions.

The entire product can be recycled, is breathable and waterproof allowing the exchange of air and water vapour through the material, this helps the internal moisture levels within the pallet not to reach harmful levels. This technology is combined with a brilliant white outer skin which reflects the most significant amount of the visible spectrum solar radiation possible, one of the most critical factors responsible for temperature excursions during transportation.

SPECIFICATIONS

| 31 23H 167 H 161 16 | | |
|---------------------|----------|-------|
| Fabric Data | Units | Data |
| Basis Weight | g/m2 | 95 |
| MD Tensile Strength | N/50mm | 220 |
| MD Elongation | % | 90 |
| CD Tensile Strength | N/50mm | 150 |
| CD Elongation | % | 100 |
| MD Nail Tear | N | 57 |
| CD Nail Tear | N | 83 |
| MD Tear Strength | N | 55 |
| CD Tear Strength | N | 89 |
| Hydrostatic Head | cm H20 | >200 |
| MVTR | g/m2/day | >1500 |


Website: www.praxas.com | E-mail address: info@praxas.com | Phone number: +31 (0)76 50 40 268



PRAXAS TLX2 CARGO COVER

Praxas TLX2
cargo covers
are proven
to be more
effective than
other similar
products in the
market

Cargo Cover type X test Ambient temperature = 44,7 °C

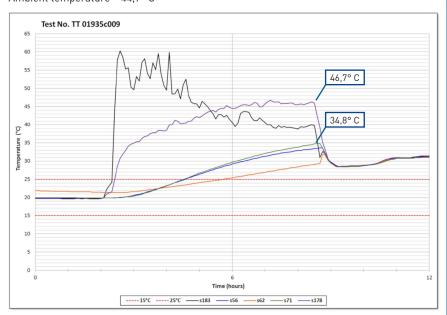



| Praxas TLX2 Cargo Covers | | | | | |
|--------------------------|-----------------|-----|-----|---------|--|
| Euro Pallet size | | | | | |
| | | L | W | Н | |
| Praxas TLX2 | W0200WW8012060 | 80 | 120 | 60 | |
| Praxas TLX2 | W0200WW80120120 | 80 | 120 | 120 | |
| Praxas TLX2 | W0200WW80120150 | 80 | 120 | 150/160 | |
| Praxas TLX2 | W0200WW80120100 | 80 | 120 | 100 | |
| UK Pallet Size | | | | | |
| | | L | W | Н | |
| Praxas TLX2 | W0200WW1012060 | 100 | 120 | 60 | |
| Praxas TLX2 | W0200WW10120100 | 100 | 120 | 100 | |
| Praxas TLX2 | W0200WW10120120 | 100 | 120 | 120 | |
| Praxas TLX2 | W0200WW10120150 | 100 | 120 | 150/160 | |