




2490HP

INSTRUCTION MANUAL LED TRONIC WALL DIMMER WITH HOTEL SWITCH (single)

This dimmer (5 -150W/VA) is suitable for incandescent, halogen (230V -150W) and dimmable LED lamps (230V - 5-70W). This dimmer has a soft start and prevents peak currents that negatively affect the lifespan of the lamp. The hotel switch allows this dimmer to be also suitable for connecting two separate switches to the same lamp. Dimmer operation: After safe installation, switch on the dimmer by pressing the rotary knob. After 1-2 seconds the LED indicator will light up. You can select the correct profile by pressing the push button (left) with a pen. The number of times the LED (on the right) flashes rapidly (1 to 8) indicates the selected profile. This dimmer has 8 dimming profiles. The best result can be achieved by experimentation by starting each profile in the 'full out' position and then start dimming. The optimal match (depending on the quality of the LED lamp) is achieved when the dimming behaviour is stable without flickering. Has a 2-wire closure. Trailing edge dimmer (RC), 230V/50Hz.

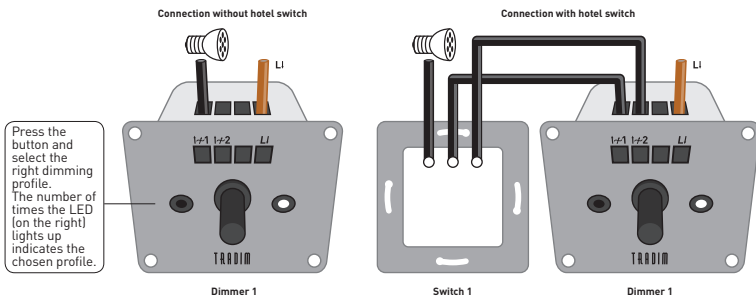

INSTALLATION:

- Always switch off the power before installation!
- Strip the wires sufficiently (approx. 1 cm).
- Connect according to the drawing.
- Screw the dimmer into the flush-mounted box.
- Select one of the 8 dimming profiles.
- Place the cover plate on the dimmer and put the button on it.

Note: Use the Tradim LED Dimming stabiliser to dim unstable (filament/led) light properly. Art. LEDDS6001
The manufacturer is not liable for damage caused by the incorrect use or incorrect installation of the dimmer.
The warranty period is 2 years from the date of purchase, to be proven to the retailer by means of your purchase receipt.

Keep this manual in a safe place in case it is needed for (re)installation!

TRADIM Aalsbergen 9, 6942 SE Didam, The Netherlands www.tradim.nl

Version 3.0 ENG (25/01/19)