

# IP65 LUMINAIRE

LED waterproof luminaire

SR05-120MS & SR05-150MS



# IP65 LUMINAIRE

Osram LED inside

SR05 SERIES



INCLUDED:




## TECHNICAL DATA:


| Model No.          | SR05-120MS   | SR05-150MS   |
|--------------------|--------------|--------------|
| Power              | 36W          | 50W          |
| Clips Q'ty (pcs)   | 10           | 12           |
| Product size (mm)  | 1207x91x78   | 1507x91x78   |
| LF (mm)            | 765          | 1065         |
| Net weight (kg)    | 1.4          | 1.7          |
| Innerbox size (mm) | 1225x95x85   | 1525x95x85   |
| Carton size (mm)   | 1240x300x275 | 1540x300x275 |
| Q'ty/CTN (pcs)     | 9            | 9            |

## IP65 LUMINAIRE DIMENSIONS:

SR05-120MS

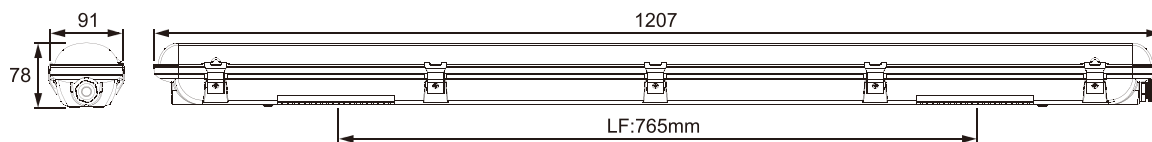

SR05-150MS

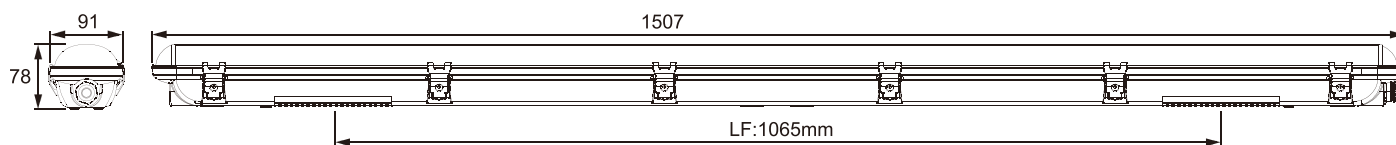

## Application

- Garages
- Factories
- Warehouse
- Process areas
- Wine cellars
- Cheese dairies
- Car parking
- Textile processing plants
- Agricultural buildings
- Plant rooms
- Transport terminals
- Paper processing

## Key Features


- High transmittance diffuser with prismatic design
- High impact resistance base.
- UV resistance
- Osram driver
- 100 lumen/w
- Quick-fix brackets supplied
- Microwave sensor

OSRAM


LED  
INSIDE

SENSOR FUNCTION

On/Off function

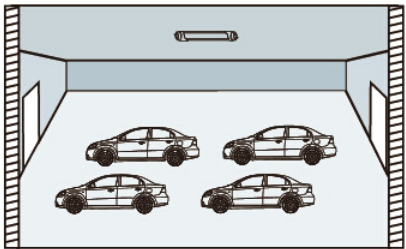

1 With sufficient ambient light, the light will not be switched on even if with motion signal.

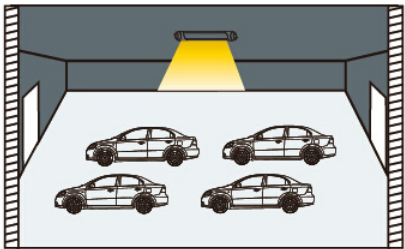

2 With insufficient ambient light, the sensor switches on the light when motion is detected.



3 After elapse of hold time, the sensor switches off the light when no motion is detected.

SENSOR DIP SWITCH SETTING

Detection area (sensitivity)

|      | 1  | 2  |
|------|----|----|
| 100% | ON | ON |
| 75%  | -  | ON |
| 50%  | ON | -  |
| 25%  | -  | -  |

Hold time

|     | 3  | 4  | 5  |        |
|-----|----|----|----|--------|
| I   | ON | ON | ON | 5s     |
| II  | -  | ON | ON | 30s    |
| III | ON | -  | ON | 90s    |
| IV  | -  | -  | ON | 5 min  |
| V   | ON | ON | -  | 20 min |
| VI  | -  | -  | -  | 30 min |

Daylight threshold

|     | 6  | 7  | 8  |          |
|-----|----|----|----|----------|
| I   | ON | ON | ON | 2Lux     |
| II  | ON | ON | -  | 10Lux    |
| III | -  | ON | -  | 30Lux    |
| IV  | ON | -  | -  | 50Lux    |
| V   | -  | -  | -  | Disable* |

\*Disable means the daylight sensor does not work. The sensor will turn on light once motion is detected regardless of ambient light level.

## MANUAL INSTALLATION

