


HEATIT Z-PUSH BUTTON 8

- Battery operated wall switch

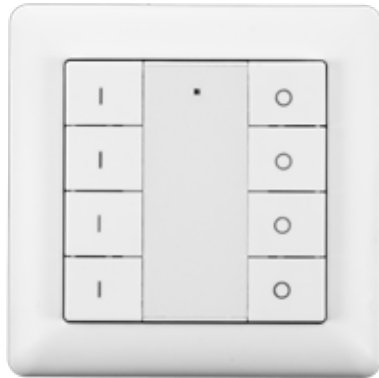

Heatit Z-Push Button 8 is a battery operated wall switch with 8 push buttons. The switch enables you to control the Z-Wave-products in your smart home system. Managing your Z-Wave products becomes easy and practical. The switch can be set up to control scenarios or work in associations with other Z-Wave products.

Heatit Z-Push Button 8 can control up to 4 separate association groups with up to 20 products or up to 16 scenarios through your gateway.

Heatit Z-Push Button 8 may not be used as a stand-alone unit; it must be included in a gateway to function.

The switch fits into standard Elko, Schneider Exxact and Gira System 55 frames.

The switch is easy to installed, and may be fastened with screws or double-sided tape.

PRODUCT INFO Heatit Z-Push Button 8

FUNCTIONS

- Battery operated wall switch
- Fits Gira System 55, Elko RS-16 and Schneider Exxact
- Controls 4 separate groups and up to 20 units
- Controls up to 16 scenarios via your gateway
- LED-diode
- Easy to install with screws or double-sided tape
- Supports encryption modes S0, S2 Authenticated Class, S2 Unauthenticated Class


TECHNICAL DATA

Protocol	Z-Wave, 868,4 MHz
SDK	6.71.01
Power	1 x CR2450 battery
Buttons	8
Operating temperature	0 - 40°C
Relative humidity	8% - 80%
Range	Up to 20 meters (depending on surroundings)
IP class	IP 20
Size (LxWxH)	71,2 x 71,2 x 13,6 mm
Explorer Frame Support	Yes
Device Type	Wall controller
Generic Device Class	Switch Remote
Specific Device Class	Switch Remote Multilevel
Routing	No
Flirs	No
Approvals	CE RoHS 2011/65/EU

WARRANTY

2 years

ART.NO.	PRODUCT
45 125 81	Heatit Z-Push Button 8 - battery operated wall switch

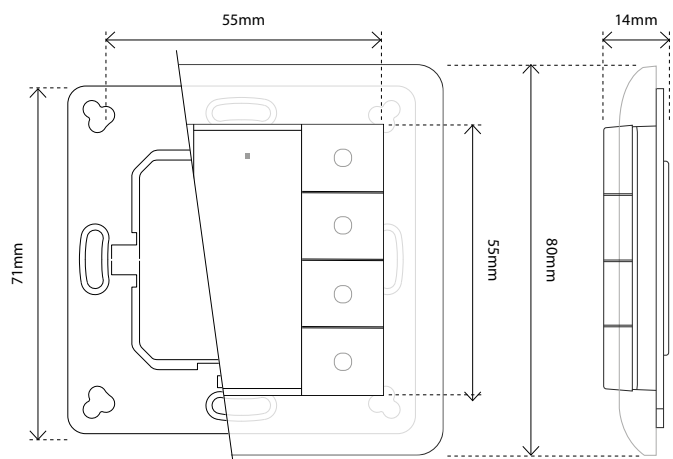

Product specifications may change without further notice. All electrical installations must be carried out by a licensed electrician. The product must be installed in accordance with national building codes and our installers manual.