


ARC 01

222 x 63mm



Specifications

Finishes: Natural Plaster Finish
 Light Source Holder: Aluminum Heatsink (included)
 Light Source / Max Consumption / Voltage: Led Strip / 2 x 20Watt/m / 12-24V or 220-240V (not included)
 Features: IP20 CE

Modules

Arc 01 Linear 1500
 01.AB.045 222x63x1500mm / 7380g


Arc 03 Corner
 01.AB.047 222x63x(245x245)mm / 1260g

Arc 05 Endcap Right
 01.AB.049 222x63x70mm / 450g


Arc 06 Endcap Left
 01.AB.050 222x63x75mm / 470g

Endcaps (Arc 05-06) may be required only at the beginning and at the end of Arc 90 Modular Light Profile(s).

NAMA owns the Intellectual Property of the products, while their designs are registered in HELLENIC INDUSTRIAL PROPERTY ORG. No: 2019060002 / EUROPEAN REGISTRATION DESIGN N°: 00632187

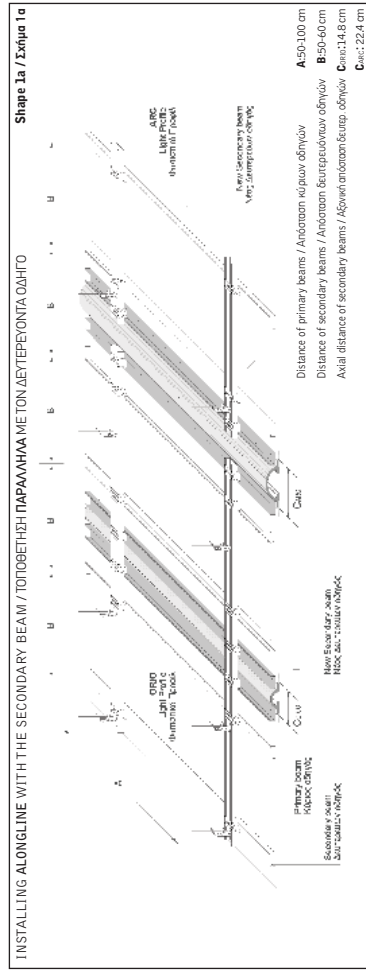

- 1a. Cut the appropriate recess in the plasterboard according to the dimension of the selected profile.
- 2a. Place new secondary beams on both sides of the recess in such a way that the axial distance between them is 148mm for the ORIO & 224mm for the ARC. In case of a new construction, we originally place the secondary beams in the optimum position of the framework.
- 3a. Install the light profile according to steps 1-12 of the Installation Instructions sheet.
- 4a. For installing ORIO profile it is not required to cut the primary beams of the framework, whereas for the ARC profile, cutting the primary beam is necessary.
- 5a. Install the light profile according to steps 1-12 of the Installation Instructions sheet.

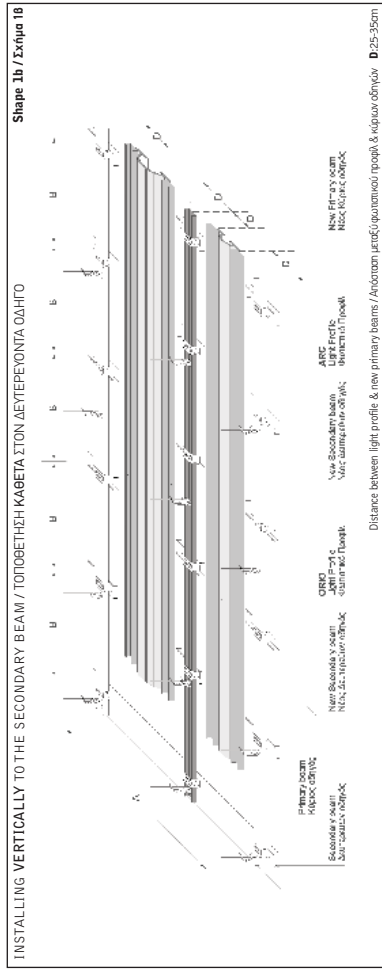

- 6a. Cut the plasterboard in the desired spot.
- 7a. Remove the secondary beams that prevent the installation of the light profile.
- 8a. Install new main beams in such a way that the distance between them and the plaster light profile ranges from 25-30cm (Shape 1b).
- 9a. Continue with the steps 1a-5a.
- 10a. In case of a new construction, we originally place the main beams in the optimum position according to the desired placement of the light profile.
- 10a. Install the light profile according to steps 1-12 of the Installation Instructions sheet.