32" Capacitive Touch PC i5-7300u

FT32I5CAPOB



- Intel® Core™ i5-7300U CPU
- 8GB RAM memory, 128GB Industrial SSD
- Supports Windows 10 & Linux (32Bit, 64Bit)
- Anti-glare surface treatment (chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- Optically bonded Touch Panel to LCD Panel
- Integrated W-LAN
- 2 year guarantee
- Optional: i3-7100U / i7-7600U Core CPU

faytech's Capacitive PC series stands out among competition with its fanless silent operation, IP65 front panel design, high reliability and fine craftwork.

It is the perfect choice for industrial and business application. It has flat edge to edge glass with IP65 waterand dust proof front panels and a sturdy aluminum case with stable VESA 100 fixation bolts (VESA 400 for 32" and up).

The PC is powered by the high-end Kaby Lake U industrial mainboard. It has an Intel® Core™ i5-7300U processor with 2.60 GHz, 8GB RAM, a 128GB SSD and Intel®'s HD graphics Chipset.

These faytech PCs are the perfect choice for a wide variety of applications including POS systems, control panels in industrial fields, in kiosk systems, office/residence automation, digital signage and in areas like shopping malls, classrooms, hotels and many more.



















Product name	32" Capacitive Touch PC i5-7300U
Model number / EAN number	FT32I5CAPOB / 6920734000180

IP Rating IP65 Front / IP40 Back

LCD Panel	
Screen diagonal (Inch/cm)	31.5/80.01
Display active screen size (cm)	69.84×39.29
Aspect ratio	16:9
Physical resolution	1920×1080
External Maximum showable resolution - HDMI, DP	1920×1200
Colours displayed	16.7M
Brightness (cd/m²)	350
Contrast	3000:1
Typical reaction time Tr / Tf (ms)	6/1
Visual Angle horizontal / vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / 30,000

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	14.50
Gross weight (kg)	20.50 (incl. cartonage)
Housing material	Aluminum
Housing (mm) L × W × H	768.0 × 475.0 × 80.0
Cut-out for clamp supports (mm) L × H	733.0 × 440.0
Amount of clamps required	10
Mounting	VESA 400×300

Internal Connectors (occupied)			
1x SO-DIMM, max. 16 GB, DDR4 1866/2133 non-ECC, Single channel memory			
3x RS232/RS485 COM connectors switchable in BIOS			
2x LCD Backlight control/LCD panel voltage box			
1x 5V/12V SATA power conn	1/12V SATA power connector 1x 12V DC power connector (2-pin)		wer connector (2-pin)
1x 4-pin SATA power connec	tor	1x S/PDIF out	put pin header
1x 8-bit Digital I/O interface		1x Line-out / N	/lic-in header
1x Front Panel box header		1x Serial ATA	6Gb/s
1x MIPI CSI connector	1x LVDS box	header	2x USB 3.0 box header

PC System	
CPU	Intel® Core™ i5-7300U Processor Kaby Lake
Graphic GPU	Intel® HD Graphics
Audio	Realtek ALC3236 Audio CODEC
Memory	8GB DDR4 non-ECC (max. 16GB)
Storage (switchable)	faytech Industrial 128GB SSD
Network	2x Realtek PCle GB LAN 8111G (1000Mbps) M.2 E-key Wi-Fi module
Driver Support	Win10; Linux; 32Bit/64Bit
Preinstalled OS	Linux Ubuntu


Touch Panel	
Touch Technology	Projected Capacitive 10-Point Multitouch
Touch Connector	USB
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare (chemical etching)


Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 24V DC-Out
Working Power (V)	24
Power Consumption (W)	94
Stand-By Consumption (W)	<1

External Connectors	
1x 24V DC-In (4-pin)	
1x W-LAN antenna connector (RP-SMA male)	
1x DisplayPort	1x HDMI
2x USB 3.0	2x USB 2.0
1x COM port Full-PIN - RS232/485; 5V/12V	
2x 10/100/1000Mbit RJ45 Ports	
1 v 2 E" modulo slot, abangaable CCD included	

Expansion Slots
1x mSATA full size (occupied by SSD)
1x M.2 E-Key Slot (occupied by Wifi card)
1x SATA connector
1x External PCIe x1 Straddle connector

Power Supply (see Power section) W-LAN antenna (RP-SMA female) Short Installation Manual

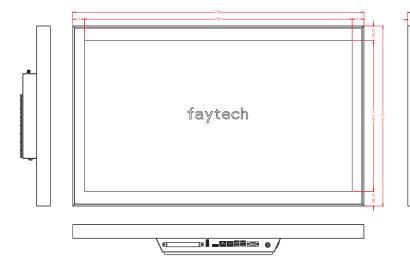



Tolerance: $\pm 2MM$

Corporate Headquarters

faytech AGBischhäuser Aue 10
37213 Witzenhausen
Germany

support@faytech.com contact@faytech.com www.faytech.com

@

China: +86 755 8958 0612 Germany: +49 5542 30374 10

USA: +1 646 205 3214 India: +91 11 49707436 Japan: +070 4127 5167