



- Compact DIN rail module with 8 relays 240VAC/10A
- Compatible with DIN rails according to EN 50022.
- Simply operates with Casambi.

The relay module LIGA.AIR.8.REL.240 is supplied with 240VAC and controlled with the Casambi app.


The module contains 6 relays (REL1-3, REL5-7) with closing contacts (SPST) and 2 relays (REL4 and REL8) with changeover contacts (SPTD) with a switching capacity of 240VAC / 10A each. The switching states of the relays are displayed with 8 LEDs «ACTIVE REL» 1-8.

There are 5 different, pre-programmed profiles for operating the relays.


For scene programming, always all 8 relays are switched on or off according to the preset states. If the module is operated with Classic firmware, only 4 relays (1-4) will be controllable.

The module is built into an ABS DIN rail enclosure for mounting on top DIN rails according to EN50022. It is in the color RAL7035 and the width D6 with the dimensions 106.5 x 90.5 x 62mm.

Dimensional drawing:

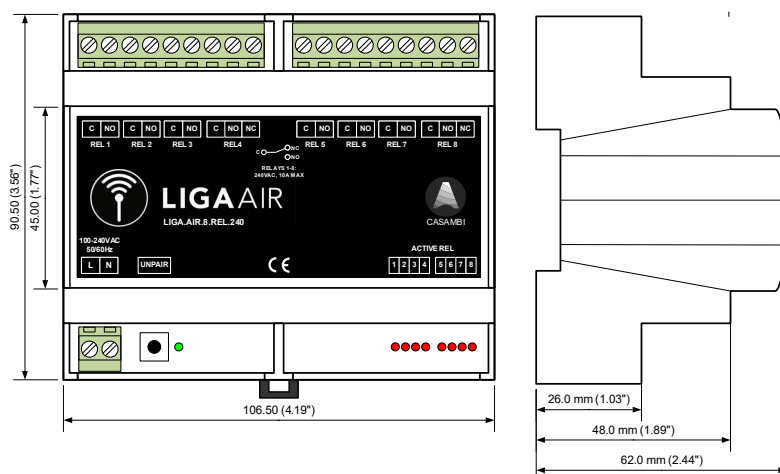

Schematics:

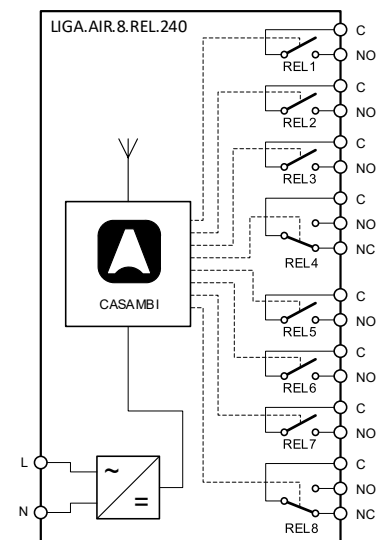


Installation only by a professional electrician according to the local regulations!

**Technical specifications:**

Dimension (T x B x H)	106.5 x 90.5 x 62mm		
Weight	275g		
Color	DIN rail enclosure, light gray (RAL7035)		
Mounting	On top of DIN rails according to EN50022		
Environmental conditions	Operation: Temperature -20 ... 50°C, humidity < 85%rH Stock: Temperature -25 ... 65°C, humidity < 95%rH		
Protection type / class	IP44, EN-60529 / Appliance Class II		
Connections	Captive screw terminals up to a conductor diameter of 2.5mm ² (AWG14): L: Supply phase conductor, N: Supply neutral conductor, REL1–8: Relay contacts		
Supply / consumption	100-240VAC (50-60Hz) / 5W		
Switching capacity	Each relay 240VAC/10A. Verify the inrush current of the specific load type!		
Displays	1 LED green: Operation, 8 LEDs red: Relay activities [ACTIVE REL 1-8]		
Control elements	Push button [UNPAIR]: Used to log off the module from the CASAMBI network.		
Predefined Casambi profiles:	Fixture name	ID	Relay function
	LIGA.AIR.8.REL.240.L	18257	Toggle, all relays operatable at once in the APP view FIXTURES.
	LIGA.AIR.8.REL.240.L.1	18258	Toggle, all relays NOT operatable in the APP view FIXTURES.
	LIGA.AIR.8.REL.240.T	18273	Momentary, for the time of trigger
	LIGA.AIR.8.REL.240.T.1s	18274	Momentary, impulse of 1 second
	LIGA.AIR.8.REL.240.S+T	18275	Rel.1-4: Toggled, Rel.5-8 Momentary, for the time of trigger.
Standards	Low Voltage Directive (LVD) 2014/35/EU, EN 60669-2-1 Electromagnetic compatibility (EMC) 2014/30/EU		
CASAMBI Modul Standards	Bluetooth 4.0 Wireless Control		
Switching times	Configurable with the Casambi application (App Store, Google Play)		
Applications	Switching on of loads e.g. lamps etc.		
Scope of delivery	1 Relay Module		

Compatible devices:**iPhone 4S** or later**iPad 3** or later**iPod Touch 5th gen** or later.**Android 4.4 KitKat** or later devices

produced after 2013 with full BT 4.0 support.

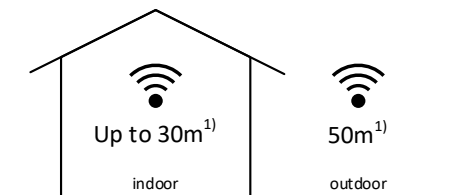Range:

Casambi uses mesh network technology so each CBU-ASD acts also as a repeater.

Longer ranges can be achieved by using multiple Casambi units.

Range is highly dependent on the surrounding and obstacles, such as walls and building materials.

