




Noistop[®] Steel

Adjustment Kit & Adjustment Profiles

Adjusting the width
of Noistop Steel modules



Adjustment Kit & Adjustment Profiles

Noistop Steel Adjustment Kit & Adjustment Profiles are repair kits used for establishing new mounting flanges to Noistop Steel modules when these are modified and cut to match a specific width.

The Adjustment Kit is a complete repair set including all required items including mounting flange, repair spray and mounting screws. The Adjustment Profile includes only the mounting flange.

Noistop Steel Adjustment Kit includes:


- Mounting flange (similar to module height, e.g. 100cm, 90cm, 70cm, 50cm, 45cm)
- Zink spray or powder coating spray
- Mounting screws

Noistop Steel Adjustment Profile includes:

- Mounting flange (similar to module height, e.g. 100cm, 90cm, 70cm, 50cm, 45cm)




Guide to change the module width using the adjustment kit/profile.

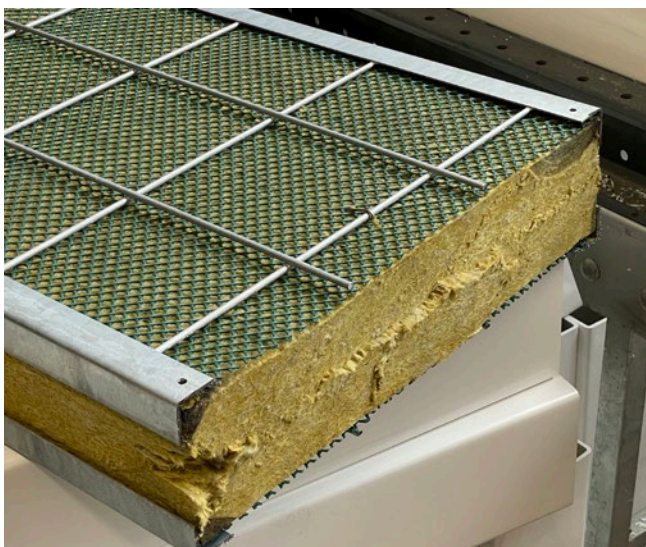

1. Cut the module to the desired width.




2. The adjustment kit/profile is used to establish a new mounting flange.

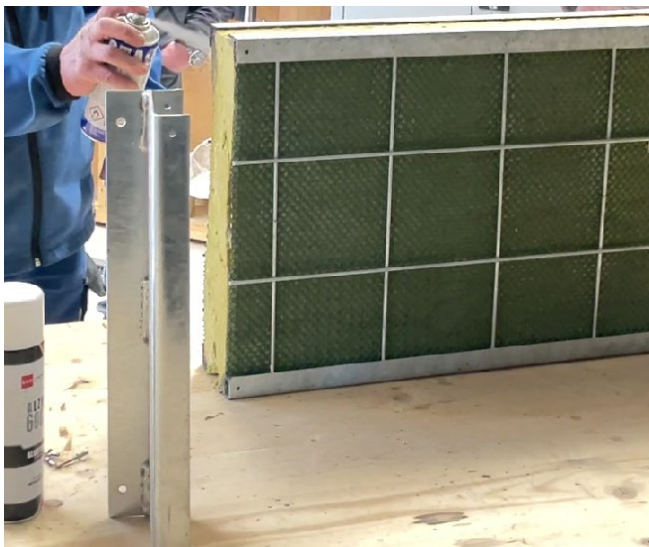

3. Use the repair spray to seal and protect the trimmed metal parts.



4. Place the mounting flange on the side of the module. Secure it with the supplied screws, or with pop rivets if available. The module is now ready for installation.

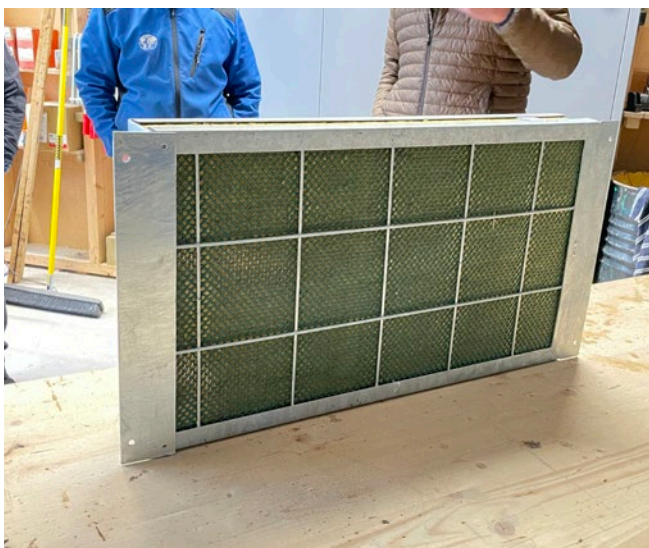

5. The module is now complete and ready to be installed.

ROCKWOOL Danmark A/S

Hovedgaden 501
DK-2640 Hedehusene

Tel: +45 4656 1616

www.noistop.rockwool.com

The greatest possible care has been taken in designing and putting together this communication. However, ROCKWOOL cannot issue any warranty relating to the completeness and accuracy of the information gathered, processing of information, results of the calculations, advice, example constructions and other results. All calculations, advice, example constructions and other results are approximations or typical values and will not bind ROCKWOOL. Please also note that the performance of the product in a construction or system strongly depends on the parameters of such a construction or system, such as but not limited to local soil conditions, the quality of the installation and other components. All of these parameters fall outside the scope of influence of ROCKWOOL. As a consequence, no warranty can be provided by ROCKWOOL as regards the performance of the product. All rights are reserved. No part of this communication may be reproduced or published by means of print, photo print, microfilm or any other means without ROCKWOOL's prior written permission. The contents of this communication are subject to amendment without notification. Although every care was taken during the preparation of this communication, ROCKWOOL cannot accept liability whatsoever for errors in this communication, nor for their consequences. Please contact ROCKWOOL Noistop® for additional information or questions at +45 4656 1616.