VLCAM200 Conference kit



Professional Camera for Video Collaboration in Conference Rooms

The Vivolink VLCAM200 Conference Camera is an indispensable video collaboration tool for businesses that use web- or cloud-based conferencing. Suitable for meeting rooms of all sizes, from huddle rooms all the way up to large conference rooms, the VLCAM200 boasts a powerful

pan-tilt-zoom camera and an advanced speakerphone, providing delicate, detailed images and vivid sound quality that more than meet the needs of most businesses. Especially well-suited to laptops, the VLCAM200 's plug-andplay design puts high-quality video communication just a USB connection away.



Plug Play

Simply Plug and Play

The VLCAM200 is incredibly easy to use- simply plug its USB connector into a desktop or laptop and you're ready to go! With no need for device drivers, the VLCAM200 is able to provide top-quality conferencing at a moment's notice, on nearly any computer.



Powerful 10X Optical Zoom PTZ Camera

Boasting pan-tilt-zoom (PTZ) and 10X optical zoom, the VLCAM200 will meet your video collaboration needs in conference rooms large or small alike, regardless of whether you want detailed views of small objects or wide views of all participants. Moreover, its quick auto-focus, fast lens, subtle pan/tilt grading and wide angle ensure an unbeatably smooth and lifelike conferencing experience.



Full HD 1080p 30fps Output Resolution

Full HD 1080p has never felt more lifelike! Even in poor lighting you can enjoy detailed, crystal-clear views of people and objects at the far site, and motion blur is nonexistent. With quality like this, you'll forget that everyone isn't even in the same room.



Up to 10 Camera Presets

With the VLCAM200 there's no need to waste time panning and zooming manually during meetings – simply program its presets ahead of time, and then during the meeting you can shift the camera from a wide view of the room to a close-up of an object with just the press a button. With not just 1, but 10 of these presets available, you can prepare yourself for nearly any situation in any environment.

VLCAM200 ConferenceCamera

Professional Camera for Video Collaboration in Conference Rooms

Product Specifications

Package contents

- Speakerphone
- Camera
- Hub
- Remote Control
- 5m camera cable (mini DIN6)
- 5m speakerphone cable (mini DIN6)
- 3m USB cable to PC (USB2.0 to PC)
- Power supply
- Quick-start guide
- wall/ceiling mount

Camera

• 10X optical zoom

- Pan: 0.1 ~65°/sec, Tilt:0.1~35°/sec
- f/1.6 to f/3.0 (fast lens, perfect picture even in low light)
- Full HD 1080p
- 250° pan; 60° tilt
- 60.9° FOV
- Multi-element, multi-coating
- Auto-focus optics
- Standard mount screw
- Flip horizontal/vertical, capable for reverse ceiling mount

Speakerphone

- Full duplex microphone array up
- Touch controls for volume down,
- up, mute phone input
- Max output 95dBSPL
- Microphones supporting 360° pick up in 6m diameter range
- Echo cancellation
- Noise suppression

I/O Connections

Remote Control

- Zoom in/out
- Pan up/down left/right
- 10 camera presets

Hub/Cables

- Mountable hub for connection of all components incl. adhesive for under table mounting
- 2 x 5m cables for connection between hub
- and camera/speakerphone
- 1 x 3m USB cable for connection to PC/Mac
- AC Power adapter

System Requirements*

- Windows
- Mac OS
- Linux

Hardware Requirements* • USB 2.0 port

Power supply

- AC 110V ~ 220V
- Consumption: DC12/4A

Physical characteristics

- Camera: 151.64×131.25×154.5mm / 1.4kg
- Speakerphone: 200×200×52mm/ 1.5kg

Compliance and tools


- YUV, MJPEG, H.264
- USB 2.0 compatible
- UVC compatible video and audio for broad application compatibility

Compatible applications

Skype[™], Microsoft® Teams, Lync, Google Hangouts™, FaceTime®, Cisco Webex®, GoToMeeting®, Adobe® Connect™, BlueJeans, Zoom, Vidyo®, Fuze, WebRTC

* For Full HD support, please check with your software application prosperies system/hardware requirements. provider



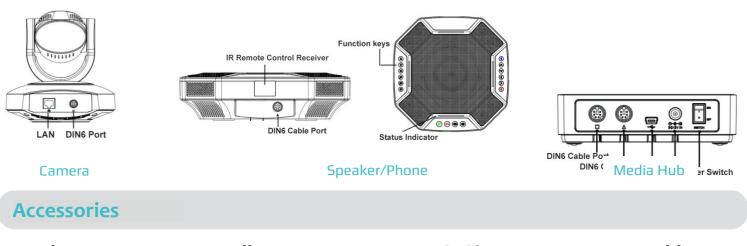

Ceiling mount

Wall mount

Monitor shelf











DIN6 10M Cable



VI MCAM2

VI CAMSCREW

VI MCAM2

VI MPS2

• Hub: 100×62×27mm / 0.16kg