


Built-in LED-dimmers  
LED-Dimmer with constant curve  
1-4 fold

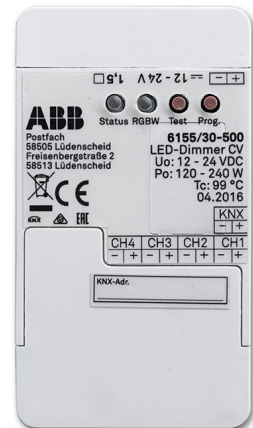

Build-in LED-Dimmer for LED strips with constant curve.  
To control RGB or RGBW-LEDs.  
Summary of 2 x 2 channels for activating warm/cold white LED strips.  
Summary of 3 channels for activating an RGB LED strip.  
Summary of 4 channels for activating an RGBW LED strip.  
Grouping of channels possible.  
Integrated load management for the automatic adaptation of the maximum current strength per channel depending on the channels used.  
With Master/Slave-function.

Connections: , KNX-line: Bus connection terminal  
Rated voltage: 12 V- - 24 V-, Output voltage: 12 V-, Secondary: 24 V-, Rated frequency: 600 Hz,  
Outputs: 4 dimming channel, Suitable for: DC, Rated current: 10 A, Rated power: 240 W  
Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,  
Dimensions: (L x W x D): 33 mm x 53 mm x 95 mm,

Order Code : 2CKA006151A0254  
Article No. : 6155/30-500  
EAN: 4011395202081