

# ReTac®

## Textures





**ADDS VISUAL INTEREST TO ANY PRINT**

ReTac® Textures can add depth and visual appeal to static, flat images with its embossed sand finish. With ReTac® on the back, eye-catching graphics printed on ReTac® Textures can easily be removed and repositioned multiple times without the worry of adhesive residue being left behind. This phthalate-free film can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- WOODGRAIN, LINEN, CANVAS AND SAND TEXTURED OPTIONS
- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE

Product Code: RTCS, RTCL, RTCC, RTCW

**150** White  
micron Phthalate-Free  
Polymeric  
PVC  Matte

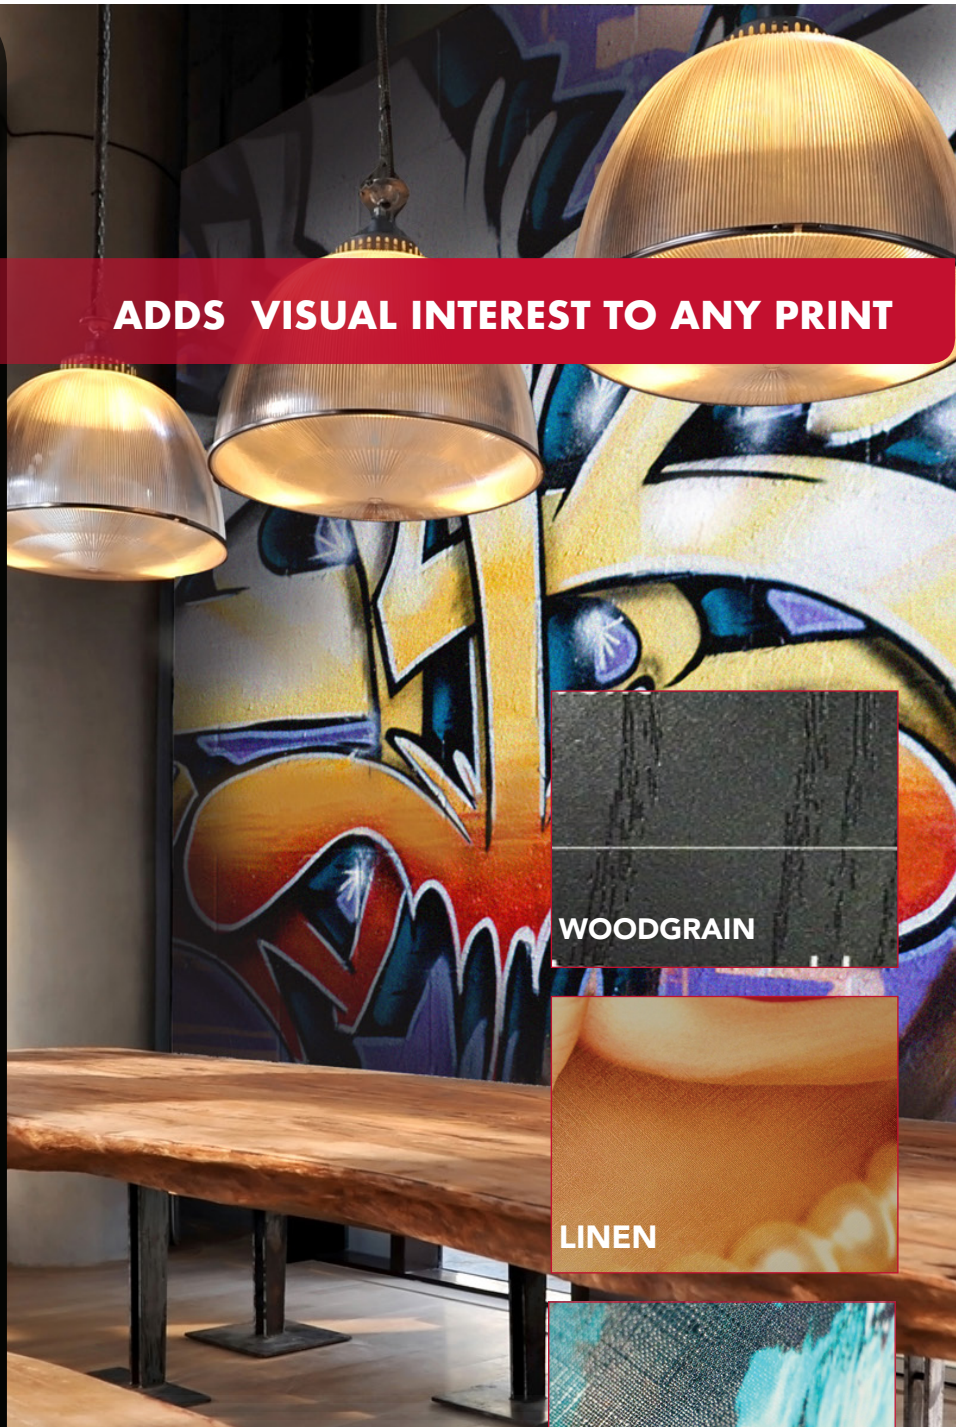

**WOODGRAIN**

**LINEN**

**CANVAS**

**SAND**

## APPLICATIONS

Smooth Flat Surfaces  
Point Of Sale Graphics  
Interior Décor  
Decals & Stickers

**DRYTAC®**  
ADHESIVE SCIENCE

[www.drytac.com](http://www.drytac.com)

# ReTac<sup>®</sup>

## Textures

ReTac<sup>®</sup> Textures is a 150µ (6 mil) printable, matte white phthalate-free polymeric PVC film with ReTac<sup>®</sup> ultra removable adhesive. It has an embossed texture-like finish that adds depth and visual appeal to static, flat graphics. A subtle texture like sand draws attention to your image or message in a distinct and creative way.

- RETAC<sup>®</sup> TEXTURES IS A PHTHALATE-FREE FILM.
- IDEAL FOR WALL GRAPHICS, CUSTOM WALL MURALS, INTERIOR DÉCOR, RETAIL DISPLAYS, TRADE SHOW GRAPHICS AND SIGNAGE, AND TEXTURED LABELS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal, for more information please contact your local representative.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2021 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

03082021

## TECHNICAL SPECIFICATION

### PRODUCT STRUCTURE

<b>Film</b>	Matte White Polymeric PVC
<b>Adhesive</b>	ReTac <sup>®</sup> ultra removable and re-positionable adhesive technology
<b>Release Liner</b>	143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper

### PRODUCT CHARACTERISTICS

<b>Film Thickness</b>	6 mil (150µ)   7 mil (175µ)
<b>Adhesive Layer</b>	1 mil (25µ)   (175µ)
<b>Outdoor Durability</b>	5 years; 2 years removability
<b>Fire Ratings</b>	Class C-s1-d0 (EN-13501) Class 1 or A (ASTM E-84) PASS (CAN/ULC-S102)
<b>Slip Ratings</b> (ReTac Textures Sand) <small>*for short-term indoor floor applications only</small>	Moderate Slip Potential (EN 13036-4) Passed (ANSI A137.1/ A326.3) Dry: 58 Wet: 29 (AS HB198:2014 (AS/AZS 4586))
<b>Application Temperature</b>	>41°F (5°C)
<b>Service Temperature Range</b>	-40°F to 120°F (4.4°C to 48.9°C)
<b>Shelf Life</b>	2 years
<b>Storage Conditions</b>	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

### INSTALLATION

#### RECOMMENDATION

Please see Wall Graphic Installation & Removal Instructions for further details. The surface must be clean and smooth and free of defects before application.

**DRYTAC<sup>®</sup>**  
**ADHESIVE SCIENCE**

#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
[bristol@drytac.com](mailto:bristol@drytac.com)  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
[toronto@drytac.com](mailto:toronto@drytac.com)  
Tel: +1 800.353.2883

#### USA

5401-B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
[customerservice@drytac.com](mailto:customerservice@drytac.com)  
Tel: +1 800.280.6013