

ix bond



Ixbond verbindet Paneel von 3-10mm stufenlos sicher und verwindungsstabil. Die Sichtfuge bleibt dabei immer dezent mit 6mm. Die Schraube kann beidseitig (innen wie außen) eingesetzt werden - praktisch, wenn sie räumliche Konstruktionen umsetzen oder nahe an Wänden bauen. Ergonomische und ästhetische Griffmulden erleichtern die Montage. Gewünschte Anzahl Innensechskantschlüssel bitte extra bestellen.

Ixbond connects 3-10mm panels infinitely and free of torsion. The face joint remains at a discrete 6mm gap. The screw can be mounted from both sides. Convenient if you create structures in 3-d or close to walls. Ergonomic and decorative recessed grips make mounting easy. Order the required keys separately.




1 60°

60° Verbinder: versilberter Metall-druckguss, Schraube Edelstahl
60° Connector: silver-plated metal die-cast, stainless steel screw

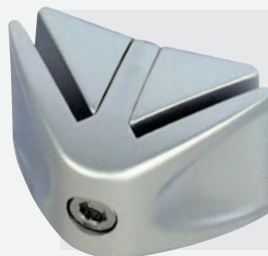



2 90°

90° Verbinder: versilberter Metall-druckguss, Schraube Edelstahl
90° Connector: silver-plated metal die-cast, stainless steel screw




3 135°

135° Verbinder: versilberter Metall-druckguss, Schraube Edelstahl
135° Connector: silver-plated metal die-cast, stainless steel screw




panel size: 3-10mm

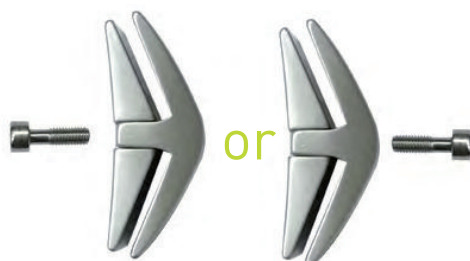


4 180°

180° Verbinder: versilberter Metall-druckguss, Schraube Edelstahl
180° Connector: silver-plated metal die-cast, stainless steel screw




5

Versilberter Metalldruckguss für die Sicherung von Sandwich Systemen.
Silver-plated metal die-cast for locking sandwich systems.




information


60°




90°



135°



180°




Mehr Ideen im Kapitel Ladenbau / Messe
Find more in chapter shop fitting / trade fair equipment




panel not included



accessoires



- 6 Innensechskantschlüssel 4mm
Key 4mm hex ballpoint L-handle

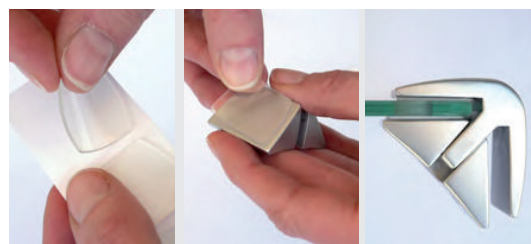

- 7 Ix bond Buffer (1mm dick) für die Befestigung von empfindlichen Materialien oder Glas. Paneelstärke mit Buffer: 2mm-8mm.

Ix bond buffer (1 mm thick) for the mounting of sensitive materials or glass. Panel thickness with buffer: 2mm-8mm.

code



pc/box

price/box

1	IX2B60AR	ix bond connector, 60°	✓	1	A
2	IX2B90AR	ix bond connector, 90°	✓	1	A
3	IX2B120AR	ix bond connector, 135°	✓	1	A
4	IX2B180AR	ix bond connector, 180°	✓	1	A
5	IX2BSWAR*	ix bond sandwich connector	✓	1	A
6	SOKEY4	t-handle hex key		1	A
7	ATPXB	ix bond buffer		20	A

*solange Vorrat reicht | while stock lasts

