

DATASHEET CX 230 AGM POWERCUBE



FIAMM PROFESSIONAL POWERCUBE AGM BATTERY


Cyclic use :

Voltage 14,4V – 15,0V at 25°C Temp. Coefficient 30mV/°C


Float use :

No limit on initial charging current voltage 13,4V – 13,7V at 25°C Temp. Coefficient -20mV/°C


Dimensions :

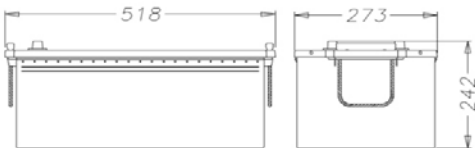

Terminal Lay-out :

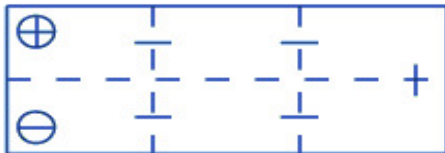

Terminal :

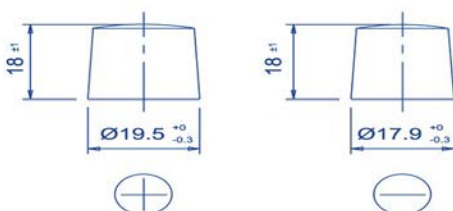

Physical Specification (mm)

Nominal voltage & capacity	: 12 Volt 230Ah(20hrs)
Cold cranking Amps	: 1200 AMP CCA EN
Dimensions length	: 518 ±2mm
Dimensions width	: 273 ±2mm
Dimensions total height	: 242 ±2mm
Weight	: 66 kg
Terminal Lay out	: 3 (pos left)
Terminal	: 1
Bottom holddown	: B00

Features FIAMM CX 230 AGM battery:

- 3* Longer Cycle life than traditional batteries (extreme charge and discharge acceptance).
- Higher resistance to vibrations than conventional batteries.
- Totally maintenance free, leak-proof and spill proof.
- Latest OE Technology and quality for Professional Quality (High Quality performance).
- FIAMM AGM batteries can be mounted in any position!

UN2800 Non-spillable battery