

2021 EPV prices Energy saving lighting controls

- Occupancy sensors
- Dimmers
- Daylight harvesting



EPV Electronics GmbH Sedanstr. 18 58507 Lüdenscheid Germany

Phone +49 2351 6583000 Fax +49 2351 6583066 info@epvelectronics.com

Valid from January1st, 2021. Replaces all previous price lists.

occy occupancy sensors

Recommended retail prices ex-works Lüdenscheid



occy smarthome occupancy sensors (24V)

Sensor head with accessories for all types of installation and 24V powerpack for system connection - and s small Powerpack for connection to your controller (see below).

| Modell | Product no. | Function | RRP excl. VAT |
|--|-------------|--|---------------------|
| occy smarthome white occy smarthome black | 102435 | maximum installation height: 5m Output signal presence and light value: 10m active passiv No Pull-up resistor necessary Power supply 15-28V DC Ambient temperature: 0-50°C IP 41 Coverage area: Ø= 2,22 x H Beispiel: H=3m Ø = 2,22 x 3m = 6,66m | 72,90 € 77,90€ |
| occy smarthome 7m extension cable | 102439 | 4-core extension cable (plug to socket). This increases the distance between the sensor head and the smarthome powerpack, e.g. if you prefer the powerpack in the immediate vicinity of your controller. | 10,90€ |













ecos occupancy sensors

Recommended retail prices ex-works Lüdenscheid



ecos 24V occupancy sensors

24V occupancy sensors can be operated in two ways:

- with EPV Power Packs to cover large areas in a simple way (see next page) or
- connected to existing control systems (Smarthome / BMS). In this case, no EPV Power Pack is required.

Each MASTER sensor can be extended with up to 30 SLAVES

The models without dimming function operate on 10.8-28V AC and DC, models with dimming function on 15-28V AC and DC.

| | Model | Product no. | Function | RRP excl. VAT |
|----------------|---------------------------|----------------|--|------------------|
| For up to 5 me | ter installation l | neight (for of | fices, class rooms, corridors,) | |
| | PM24V/5 MASTER | 102043 | Pure occupancy sensor. No daylight sensing. Fixed delay time = 10 Minutes. Output: potential free / dry contact. | 52,90 € |
| | PM/24V/5L MASTER | 102045 | Occupancy sensor with adjustable daylight threshold. Adjustable threshold level 100 to 1000 lux. Adjustable delay time 10 seconds to 14 minutes. Output: potential free / dry contact. | 56,90 € |
| | PM/24V/5LSa DIM MASTER | 102049 | Combined occupancy and daylight harvesting sensor (with dimming output). For maximum energy efficiency. Adjustable delay time 10 seconds to 14 minutes. Adjustable dimming set point (guaranteed lux level) 100 - 1000 lux. Dimming signal: 1-10V. Output: potential free / dry contact. | 67,90 € |
| | PM/24V/5 SLAVE | 101798 | SLAVE sensor for coverage area extension. To be used in combination with MASTER sensor. One MASTER can be extended with up to 30 SLAVES. | 40,90 € |
| For up to 12 m | eter installation | height (for h | alls, warehouses, industrial,) | |
| | PM/24V/12 MASTER | 102046 | Pure occupancy sensor. No daylight sensing. Fixed delay time = 10 minutes. Output: potential free / dry contact. | 57,90 € |
| | PM/24V/12L MASTER | 102048 | Occupancy sensor with adjustable daylight threshold. Adjustable threshold level 100 to 1000 lux. Adjustable delay time 10 seconds to 14 minutes. Output: potential free / dry contact. | 61,90 € |
| | PM/24V/12 SLAVE | 102127 | SLAVE sensor for coverage area extension. To be used in combination with MASTER sensor. One MASTER can be extended with up to 30 SLAVES. | 47,90 € |

ecos occupancy sensors

Recommended retail prices ex-works Lüdenscheid



ecos 230V occupancy sensors

All 230V sensors (except /K models) feature a powerful built-in double-latch Tungsten relay for direct switching of the load. Permissible load per sensor: 2300 VA / 800 A inrush current (therefore suitable for LEDs or ballasts).



- cable connector plug (WAGO) with strain relief
- installation clip to mount the sensor into false / suspended ceilings (more details below) where you can reach to the rear of the sensor

| the sensor. | | | | | |
|-------------------|---------------------------|----------------|--|------------------|--|
| | Model | Product no. | Function | RRP excl. VAT | |
| For up to 5 meter | r installation height (fo | r offices, cla | ss rooms, corridors,) | | |
| | PM/230V/5 | 101918 | Pure occupancy sensor. No daylight sensing. Fixed delay time = 10 Minutes. | 56,90 € | |
| | PM/230V/5L | 101919 | Occupancy sensor with adjustable daylight threshold. Adjustable threshold level 100 to 1000 lux. Adjustable delay time 10 seconds to 14 minutes. | 59,90 € | |
| | PM/230V/5LSa DIM | 101921 | Combined occupancy and daylight harvesting sensor (with dimming output). For maximum energy efficiency. Adjustable delay time 10 seconds to 14 minutes. Adjustable dimming set point (guaranteed lux level) 100 - 1000 lux. Dimming signal: 1-10V. | 77,90 € | |
| For up to 12 met | er installation height (f | or halls, war | ehouses, industrial,) | | |
| | PM/230V/12 | 102052 | Pure occupancy sensor. No daylight sensing. Fixed delay time = 10 minutes. | 61,90 € | |
| 800 | PM/230V/12L | 102054 | Occupancy sensor with adjustable daylight threshold. Adjustable threshold level 100 to 1000 lux. Adjustable delay time 10 seconds to 14 minutes. | 65,90 € | |

accessories for ecos sensors

Recommended retail prices ex-works Lüdenscheid



accessories for ecos occupancy sensors 24V

Useful helpers to get your project done quickly. All 24V sensors have an **RJ12 socket** for electrical connection on the back.



| Model | Product no. | Function | RRP excl. VAT |
|---|-------------|--|------------------|
| KA2 cable adapter set | 101947 | For the connection of 24V sensors to control systems / Smarthome systems: Cable adapter for the transition from flat cable with Western plug (RJ11, RJ12) on installation cable or single wires. RJ12 to 6-pin screw terminal. | 7,90 € |
| 2-into-1 RJ12 adapter (Y-adapter) | 101382 | Allows easy connection of multiple 24V sensors via RJ12 cable (e.g. MASTER / SLAVE). Rule of thumb: per each SLAVE usually 1 adapter is required. | 5,90 € |
| RJ12 cable, 6 meters | 101871 | For connecting 24V sensors (e.g. SLAVES to MASTER), by using the above 2-way adapter. 6-core cable with 6-pin plugs (6P6C). 100% electrically tested. Length: 6 meters. | 5,90 € |

Optional mounting accessories for ecos occupancy sensors (230V + 24V) & LS3

A mounting clip for the installation of the sensor into **multi-part accessible ceilings (for example ceiling tiles)** is always included in the scope of delivery.

| | Spring-loaded clip | 101683 | For the installation of occupancy sensors into suspended one-piece ceilings (e.g. plaster board, acoustic ceilings) in which the rear of the sensor is inaccessible and thus the standard installation clip cannot be used. | 7,90€ |
|----|----------------------------|--------|---|--------|
| 60 | Surface mounting enclosure | 101472 | For surface installation (e.g. bare concrete ceilings). | 7,90 € |

Power Packs

Recommended retail prices ex-works Lüdenscheid




Power Packs

For simple plug & play occupancy sensing coverage of large areas. Power Packs are supplied with mains voltage on the primary side. On the sensor side, the sensors are connected via plug & play (see 24V accessories). **One MASTER sensor and up to 30 SLAVE sensors** may be connected via plug & play with RJ12 cable to each power pack.

Power packs are not required when operating the 24V sensors in connection with a control system / Smarthome system.

| Tower paole are not regarded when operating the 211 contests in continuously man a contact system, | | | | | | |
|--|-------------------|----------------|---|---------------------|--|--|
| | Model | Product no. | Function | RRP excl. VAT | | |
| Section 2 de la constante de l | Power Pack XL DIM | 102144 | Suitable for analogue dimming and switching. Powerful double-latch tungsten relay 2300 VA / 800 A and 1-10V dimming output. | 51,90 € | | |
| (1) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | Power Pack DALI | 102233 | For digital dimming and switching with DALI. Supports up to 45 DALI devices directly. By connecting a DALI voltage source, the operation of 125 DALI devices is possible. | 72,90 € | | |

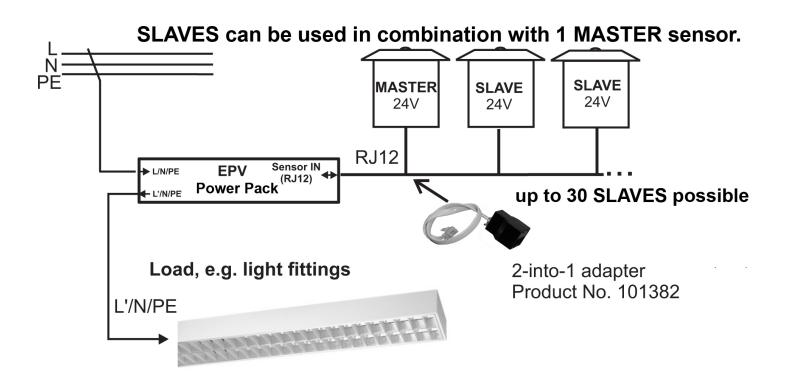

DIMMTRONIC dimmers

Recommended retail prices ex-works Lüdenscheid



DIN rail dimmers trailing-edge Manual operation through push-button or through 1-10V control signal. Width: 6 TE (105 mm). For DIN rail mounting in sub-distributions. RRP excl. Product **Function** Model VAT no. M1000/3.3 101722 Trailing-edge dimmer. Control either through 144,90 € push-button or through 0-10V signal (also 1-10V). Resistive loads: min. 10 Watts, maximum 1000 Watts. Capacitive loads: min. 10 VA, maximum 850 VA.

ecos occupancy sensors



Project solutions and custom models

Special projects require special solutions. The following is a selection from our portfolio. These sensors are not always available from stock and there may be a minimum order quantity. If you are interested, please contact us (info@epvelectronics.com)

| | Model | Product no. | Function | RRP excl VAT |
|----------------|----------------------------|---------------|--|-----------------|
| or up to 5 met | er installation height (a | pplicable for | 230V and 24V versions) | |
| | PM/230V/5T | 101920 | Pure occupancy sensor with adjustable time. 230V. No daylight sensing. Adjustable delay time 10 seconds to 14 minutes. | 58,90€ |
| | PM/24V/5T MASTER | 102044 | Pure occupancy sensor with adjustable time. 24V. No daylight sensing. Adjustable delay time 10 seconds to 14 minutes. Output: potential free / dry contact. | 55,90 € |
| | PM/230V/5K DIM | 101926 | Occupancy based dimming. 230V. ("corridor function") Adjustable delay time 10 seconds to 14 minutes. Adjustable minimum light level 1-5V. 1-10V output signal (no switching). | 67,90 € |
| | PM/24V/5K DIM MASTER | 101792 | Occupancy based dimming. 24V. ("corridor function") Adjustable delay time 10 seconds to 14 minutes. Adjustable minimum light level 1-5V. 1-10V output signal (no switching). | 66,90 € |
| | PM/230V/5LSb DIM | 101922 | Combined occupancy and daylight harvesting sensor (w. dimming output). 230V. Adjustable delay time 10 seconds to 14 minutes. Adjustable dimming set point (guaranteed lux level) 100 - 1000 lux. Switch-off priority: no occupancy. | 77,90 € |
| | PM/24V/5LSb DIM MASTER | 102050 | Combined occupancy and daylight harvesting sensor (w. dimming output). 24V. Adjustable delay time 10 seconds to 14 minutes. Adjustable dimming set point (guaranteed lux level) 100 - 1000 lux. Switch-off priority: no occupancy. Dimming signal: 1-10V. Output: potential free / dry contact. | 67,90€ |
| or up to 12 me | eter installation height (| applicable fo | or 230V and 24V versions) | |
| | PM/230V/12T | 102053 | Pure occupancy sensor with adjustable time. 230V. No daylight sensing. Adjustable delay time 10 seconds to 14 minutes. | 64,90 € |
| 60 | PM/24V/12T MASTER | 102047 | Pure occupancy sensor with adjustable time. 24V. No daylight sensing. Adjustable delay time 10 seconds to 14 minutes. Output: potential free / dry contact. | 60,90€ |
| | PM/230V/12K | 102072 | Occupancy based dimming. 230V. (corridor function) Adjustable delay time 10 seconds to 14 minutes. Adjustable minimum light level 1-5V. 1-10V output signal (no switching). | 75,,90 € |
| 600 | PM/24V/12K DIM MASTER | 102128 | Occupancy based dimming. 24V. (corridor function) Adjustable delay time 10 seconds to 14 minutes. Adjustable minimum light level 1-5V. 1-10V output signal (no switching). | 75,90 € |

About EPV

Energy efficiency is our speciality.

EPV Electronics GmbH has been developing, manufacturing and distributing innovative control solutions since 1990. With our focus on R&D and engineering, EPV has pioneered several successful technologies. In addition to our own products we also work as a technology partner for renowned OEM's.

All EPV products are designed and manufactured in Germany (including 100% testing and ISO 9001 certified manufacturing).

Energy efficiency, made in Germany.

PROJECT custom solutions

Cannot find what you are looking for? Contact us if you require custom solutions.

These include amongst others:

- Project-specific customised versions of EPV products
- OEM: customer-branded products
- AIRCOSAVER energy saving device for air conditioners





EPV Electronics GmbH Sedanstr. 18 58507 Lüdenscheid Germany

Phone +49 2351 6583000 Fax +49 2351 6583066 info@epvelectronics.com