


CHESS DYNAMIC



GENERAL DETAILS

REFERENCE:	K50510.MP.DW · K50510.OP.DW
INSTALLATION:	Modular ceiling
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Square
LIGHT DIRECTION:	Fixed
REGULATION:	DALI · Push · 1..10V · No dimmable
OPTIC COVER:	Microprismatic · Opal
UTILIZATION:	Indoor
WARRANTY:	3 years

MEASURES

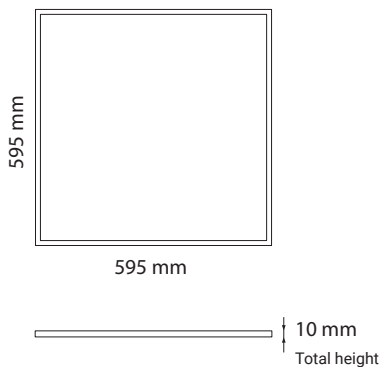

GENERAL DIMENSIONS

HEIGHT:	10 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m
MINIMUM HEIGHT OF FALSE CEILING:	35 mm

ELECTRICAL DETAILS

LAMP:	LED
LED:	Epistar
PROTECTION CLASS:	□
WATTS:	40 W
COLOUR TEMPERATURE:	3000-4000-5700K
EFFICIENCY 5700K:	85 lm/W
5700K lm:	3060 lm
EFFICIENCY 4000K:	95 lm/W
4000K lm:	3586 lm
EFFICIENCY 3000K:	76 lm/W
3000k lm:	2991 lm
ENERGETIC EFFICIENCY:	A+
DRIVER:	Lifud (Included)
VOLTAGE:	100-240V
mA:	1000 mA
LIFE TIME:	35.000 h
CRI:	≥ 80

ENERGY LABEL




CHESS DYNAMIC



GENERAL DETAILS

REFERENCE:	K50511.DW
INSTALLATION:	Modular ceiling
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Rectangular
LIGHT DIRECTION:	Fixed
REGULATION:	No dimmable · 1..10V · Push · DALI
OPTIC COVER:	Opal · Microprismatic
UTILIZATION:	Indoor
WARRANTY:	3 years

MEASURES

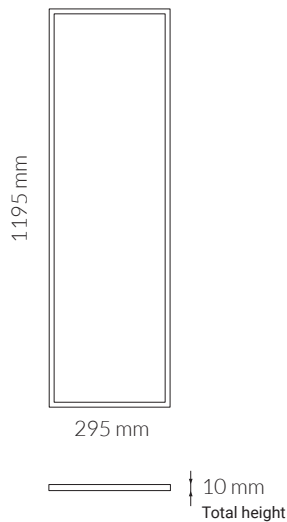

GENERAL DIMENSIONS

HEIGHT:	10 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m
MINIMUM HEIGHT OF FALSE CEILING:	35 mm

ELECTRICAL DETAILS

LAMP:	LED
LED:	Epistar
PROTECTION CLASS:	□
WATTS:	36 W
COLOUR TEMPERATURE:	3000-4000-5700K
EFFICIENCY 5700K:	82 lm/W
5700K lm:	3254 lm
EFFICIENCY 4000K:	95 lm/W
4000K lm:	3569 lm
EFFICIENCY 3000K:	77 lm/W
3000K lm:	3019 lm
ENERGETIC EFFICIENCY:	A+
DRIVER:	Lifud (Included)
mA:	900 mA
VOLTAGE:	230V
LIFE TIME:	50.000 h
CRI:	≥ 80
UGR:	<19

ENERGY LABEL




CHESS DYNAMIC



GENERAL DETAILS

REFERENCE:	K50512.DW
INSTALLATION:	Modular ceiling
MATERIAL:	Aluminium
INSIDE IP DEGREE:	IP44
OUTSIDE IP DEGREE:	IP20
FORM:	Rectangular
LIGHT DIRECTION:	Fixed
REGULATION:	No dimmable · 1..10V · Push · DALI
OPTIC COVER:	Microprismatic · Opal
UTILIZATION:	Indoor
WARRANTY:	3 years

MEASURES

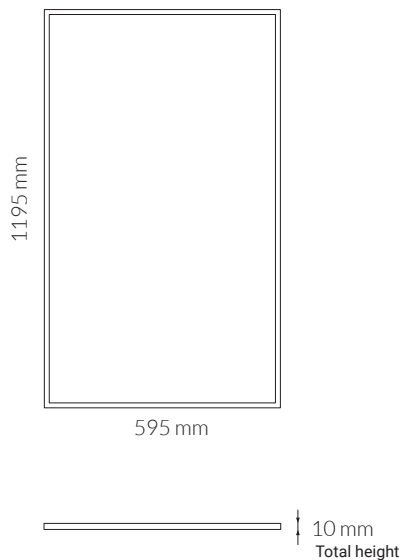

GENERAL DIMENSIONS

HEIGHT:	10 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m
MINIMUM HEIGHT OF FALSE CEILING:	35 mm

ELECTRICAL DETAILS

LAMP:	LED
LED:	Epistar
PROTECTION CLASS:	□
WATTS:	60 W
COLOUR TEMPERATURE:	3000-4000-5700K
EFFICIENCY 5700K:	84 lm/W
5700K lm:	4942 lm
EFFICIENCY 4000K:	93 lm/W
4000K lm:	5247 lm
EFFICIENCY 3000K:	76 lm/W
3000K lm:	4514 lm
ENERGETIC EFFICIENCY:	A+
DRIVER:	Lifud (Included)
mA:	1500 mA
VOLTAGE:	100-240V
LIFE TIME:	50.000 h
CRI:	≥ 80
UGR:	<19

ENERGY LABEL



