


### CLIXX GLOBE



DIMENSIONS

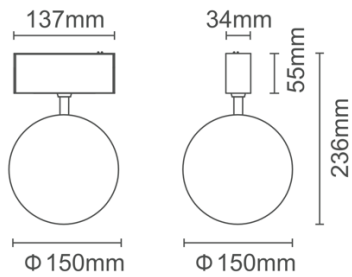


ACCESSORIES

<b>Category</b>	Track lighting
<b>Colour</b>	Black
<b>Light source</b>	LED (integrated)
<b>Power</b>	5W
<b>Luminous flux</b>	290 lm
<b>Colour temperature</b>	2700K / 3000K (standard) / 4000K
<b>Colour Rendering Index</b>	CRI>90
<b>Efficacy</b>	58 lm/W
<b>Lifetime</b>	>50.000h
<b>Beam angle</b>	Diffuse
<b>Driver</b>	Not included
<b>Voltage</b>	24V
<b>Input voltage</b>	110 – 240 V
<b>Dimming</b>	Triac / 1-10V / DALI / Zigbee
<b>IP rating</b>	IP20
<b>Weight</b>	487 g
<b>Material</b>	Aluminium
<b>Warranty</b>	5 years



LIGHT DISTRIBUTION

**Diffuse**



h(m)	E(lx)	Φ(m)
1	189	Φ2.35
2	47	Φ4.71
3	21	Φ7.07
4	11	Φ9.43
5	7	Φ11.78