

**CLIXX MICRO**  
MAGNETIC  
TRACK  
SYSTEM



LIGHTIN●VA

## BRING SPACES TO LIFE WITH LIGHT

Lighting is an essential part of any architectural design and can emphasize the designer's vision. Thoughtful decisions in interior and exterior design can be highlighted and enhance the experience of the space. Light can illuminate art and be the work of art itself.

Lightinova offers a comprehensive range of lighting solutions for even the most creative architects, interior designers and lighting designers. Customized solutions in which color temperature, light output, beam angles and control options can be tailored to the specific application.

Aesthetic lighting fixtures without compromising on functionality. Intelligent systems yet easy to use and install. Our specialists offer advice and guidance to achieve the best possible result.

Bring your next project to life with Lightinova.

[lightinova.com](http://lightinova.com)





## A MINIMALISTIC INTERPLAY OF LINES

CLIXX MICRO 24V magnetic track lighting system; the true definition of minimalism. The ultra thin tracks of just 19mm in width and 13.5mm in height appear visually trimless even when surface mounted. The profile height being equal to the thickness of plasterboard allows for easy integration without lowering the ceiling.

The CLIXX MICRO system offers endless configuration possibilities due to the wide range of profiles, corners, installation types, light modules and control options.



## MAGNETIC CONNECTION

The CLIXX MICRO LED light modules are magnetically fastened to the tracks, making them easy to install by hand without the need for tools. The low voltage of the system allows the light modules to be positioned and moved while the power is on. When the light modules are magnetically connected to the track, they are automatically supplied with power and function immediately.

The installation of the LED light modules is therefore no more than a simple 'click' allowing easy repositioning.






CORNER 90° +  
90° POWER CONNECTOR

INNER CORNER 90° +  
FLEXIBLE POWER CONNECTOR

POWER CONNECTOR +  
REMOTE POWER SUPPLY

TRACKS

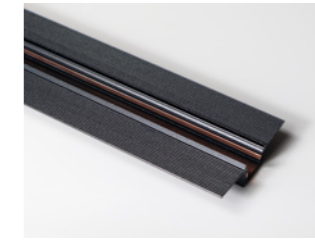

**SURFACE PROFILE 1M**

CM-S-100-BK/WT

**TRIMLESS PROFILE 1M**

CM-T-100-BK/WT

**SURFACE PROFILE 2M**

CM-S-200-BK/WT

**TRIMLESS PROFILE 2M**

CM-T-200-BK/WT

ALL TRACKS INCLUDE END-CAPS

CORNERS

**SURFACE CORNER 90°**  
CM-S-C90-BK/WT



**TRIMLESS CORNER 90°**  
CM-T-C90-BK/WT



**SURFACE INNER CORNER 90°**  
CM-S-IC90-BK/WT



**TRIMLESS INNER CORNER 90°**  
CM-T-IC90-BK/WT



CONNECTORS

**POWER CONNECTOR**  
CM-PC-BK/WT



**180° POWER CONNECTOR**  
CM-PC180-BK/WT



**90° POWER CONNECTOR**  
CM-PC90-BK/WT



**FLEXIBLE POWER CONNECTOR**  
CM-FPC-BK/WT



POWER SUPPLY

**60W REMOTE DIM POWER SUPPLY**  
24V | 60W | TRIAC/1-10V  
KVF-24060-TDH

178 X 60 X 22 MM



**150W REMOTE DIM POWER SUPPLY**  
24V | 150W | TRIAC/1-10V  
KVG-24150-DHS

367 X 30 X 22 MM



**100W REMOTE DALI DIM POWER SUPPLY**  
24V | 100W | DALI  
FV100W24CG-DALI

190 X 65 X 22 MM



**120W REMOTE NON-DIM POWER SUPPLY**  
24V | 120W | SWITCHABLE  
FV120W24CG

190 X 65 X 22 MM





COLOUR

● BLACK ● WHITE

BK | WT



TRACKS



PENDANT PROFILE 1M

CM-P-100-BK/WT

PENDANT PROFILE 2M


CM-P-200-BK/WT

ALL TRACKS INCLUDE END-CAPS

SUSPENSION KIT 2M (2 PCS)  
CM-P-SK-BK/WT



CEILING DRIVERBOX  
CM-P-CDB-BK/WT



CEILING ROSE (REMOTE DRIVER)  
CM-P-CR-BK/WT



CORNERS

PENDANT CORNER 90°  
CM-P-C90-BK/WT



PENDANT OUTER CORNER 90°  
CM-P-OC90-BK/WT



PENDANT INNER CORNER 90°  
CM-P-IC90-BK/WT



CONNECTORS

POWER CONNECTOR  
CM-PC-BK/WT



180° POWER CONNECTOR  
CM-PC180-BK/WT



90° POWER CONNECTOR  
CM-PC90-BK/WT



FLEXIBLE POWER CONNECTOR  
CM-FPC-BK/WT



POWER SUPPLY

60W BOX/REMOTE DIM POWER SUPPLY  
24V | 60W | TRIAC/1-10V  
KVF-24060-TDH

178 X 60 X 22 MM



150W REMOTE DIM POWER SUPPLY  
24V | 150W | TRIAC/1-10V  
KVG-24150-DHS

367 X 30 X 22 MM



100W BOX/REMOTE DALI DIM POWER SUPPLY  
24V | 100W | DALI  
FV100W24CG-DALI

190 X 65 X 22 MM



120W BOX/REMOTE NON-DIM POWER SUPPLY  
24V | 120W | SWITCHABLE  
FV120W24CG


190 X 65 X 22 MM



COLOUR

● BLACK ● WHITE


BK | WT

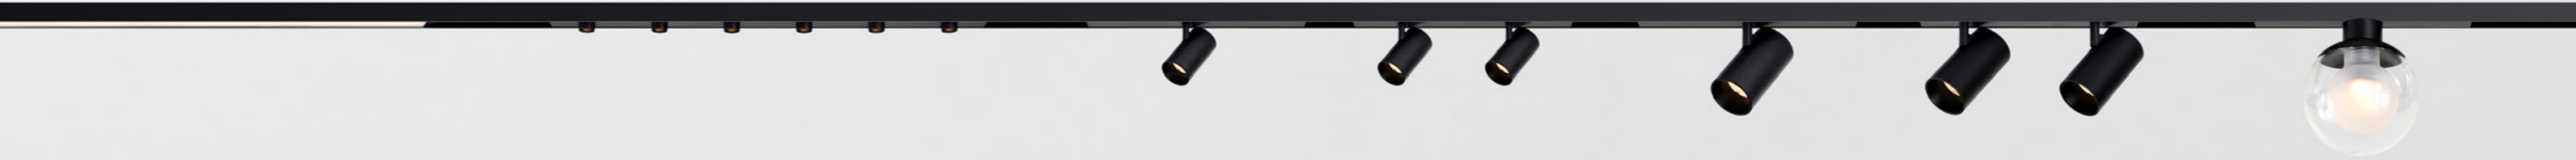

## ALL-IN-ONE LIGHTING SOLUTION

Each CLIXX MICRO magnetic light module is equipped with a high-quality integrated LED light source with unique light distribution. The choice of different beam angles, color temperatures and dimming types offer a personalized solution. Light modules can be added, moved and removed, allowing the system to easily adapt to any changes in the space.

Different light modules offer the perfect light for every application. Linear light modules with high light output and diffuse light for general lighting and spot modules with focused bright light for accent lighting make the CLIXX MICRO system an all-in-one solution.

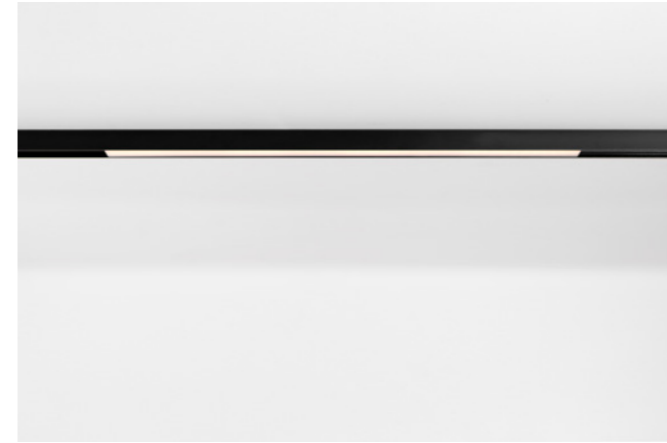



24V | IP20 | CRI >90 | >50.000 H

**LINE 30**

P	CCT	BEAM	FLUX	DIM
6W	2700K	110°	600Lm	TRIAC
	3000K			DALI
	4000K			

**LINE 60**

P	CCT	BEAM	FLUX	DIM
12W	2700K	110°	1200Lm	TRIAC
	3000K			DALI
	4000K			

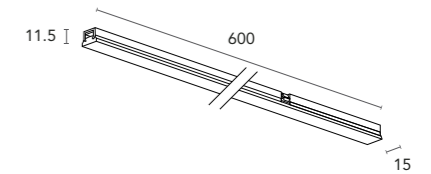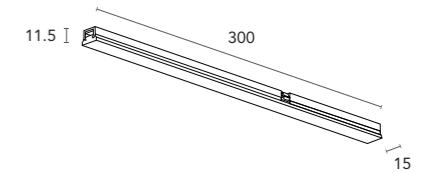

COLOUR

BLACK | WHITE



NAME	CODE	CCT	BEAM	COLOUR
CM	- L30	- 30	- 110	- BK
LINE	L30: 300MM	27: 2700K	110°	BK: BLACK
	L60: 600MM	30: 3000K		WT: WHITE
		40: 4000K		





24V | IP20 | CRI >90 | >50.000 H

**DOT 06**



P	CCT	BEAM	FLUX	DIM
6W	2700K	36°	700Lm	TRIAC
	3000K	45°		DALI
	4000K			

**DOT 12**

P	CCT	BEAM	FLUX	DIM
12W	2700K	36°	1400Lm	TRIAC
	3000K	45°		DALI
	4000K			

COLOUR

BLACK | WHITE

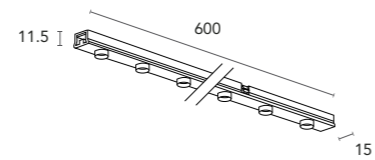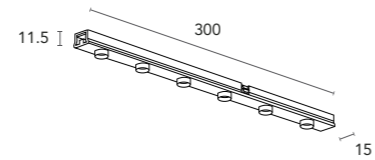

NAME	CODE	CCT	BEAM	COLOUR
CM	- D06	- 30	- 36	- BK
DOT	D06: 300MM	27: 2700K	36°	BK: BLACK
	D12: 600MM	30: 3000K	45°	WT: WHITE
		40: 4000K		






24V | IP20 | CRI >90 | >50.000 H


**SPOT 22**

P	CCT	BEAM	FLUX	DIM
3W	2700K	24°	350Lm	SWITCH
	3000K	36°		
	4000K			



**SPOT 32**

P	CCT	BEAM	FLUX	DIM
5W	2700K	24°	490Lm	TRIAC DALI
	3000K	36°		
	4000K			



COLOUR

BLACK | WHITE




NAME	CODE	CCT	BEAM	COLOUR
CM	- S32	- 30	- 36	- BK
SPOT	S22: Ø22MM	27: 2700K	24°	BK: BLACK
	S32: Ø32MM	30: 3000K	36°	WT: WHITE
		40: 4000K		



24V | IP20 | CRI >90 | >50.000 H


**SPOT 22D**

P	CCT	BEAM	FLUX	DIM
6W	2700K	24°	700Lm	SWITCH
	3000K	36°		
	4000K			



**SPOT 32D**

P	CCT	BEAM	FLUX	DIM
10W	2700K	24°	980Lm	TRIAC DALI
	3000K	36°		
	4000K			



COLOUR

BLACK | WHITE

NAME	CODE	CCT	BEAM	COLOUR
CM	- S22D	- 30	- 36	- BK
SPOT	S22D: Ø22MM	27: 2700K	24°	BK: BLACK
	S32D: Ø32MM	30: 3000K	36°	WT: WHITE
		40: 4000K		








24V | IP20 | CRI >90 | >50.000 H

**GLOBE**

P	CCT	BEAM	FLUX	DIM
3W	2700K 3000K 4000K	330°	240Lm	TRIAC DALI



COLOUR

BLACK | WHITE



NAME	CODE	CCT	BEAM	COLOUR
CM	- G80	- 30	- 330	- BK
GLOBE	G80: Ø80MM	27: 2700K 30: 3000K 40: 4000K	330°	BK: BLACK WT: WHITE



**LIGHTINOVA**

Korhoenweg 17, 4791 RM Klundert  
Netherlands

tel. +31 (0) 76 369 00 24

e-mail [info@lightinova.com](mailto:info@lightinova.com)

[www.lightinova.com](http://www.lightinova.com)

Lightinova reserves the right to make any necessary aesthetic, technical, constructive or dimensional changes without notice to improve its products.  
Such cases cannot be claimed by the customer. Changes and printing errors reserved.

