

Lighting - Product Catalog 09/2018 v1.2

LED Daylight Ballasts Tungsten Professional Lighting Accessories



ABOUT ARRI

ARRI GROUP

With headquarters located in Munich, Germany, Arnold and Richter Cine Technik (ARRI) was founded in 1917 and is the world's largest manufacturer and distributor of motion picture camera, digital intermediate and lighting equipment. The ARRI Group comprises a global network of subsidiaries, agents and representatives that covers all aspects of the film industry: design, engineering, production, equipment rental, turnkey lighting solutions, post production, film and sound laboratory services, and visual effects. The Academy of Motion Picture Arts and Sciences has recognized ARRI's engineers and their technical contributions with 19 Scientific and Engineering Awards.



Award-winning Daylight technology, ARRIMAX M-Series (Scientific and Engineering Award).



ARRI Lighting R&D and production facilities in Stephanskirchen near Rosenheim (Germany).

ARRI SYSTEM GROUP

As well as being a major manufacturer of lighting equipment, ARRI is also an expert in how this equipment can be put to best use. Our engineers and project leaders manage the execution of lighting solutions. The ARRI System Group is specialized in complex project work and can offer complete services for turnkey solutions of new installations or upgrades. The service options include technical and conceptual consulting, system planning and design, project management and controlling, logistics, installation, acceptance tests, training and customer service. Our clients are film and television studios, Theaters, event organizers, and industrial companies. With a world-wide network of system specialists ARRI is offering regional support from Berlin, Milan, Hong Kong, and Blauvelt (New York City area).



Green Studio turnkey solutions with innovative LED technology.

DISCLAIMER OF WARRANTY

All deliveries, services, offers and contracts are exclusively subject to our currently applicable General Sale And Delivery Terms & Conditions for Merchants. Refer to page 167 for further details.

Technical data, specifications, accessories, scope of delivery, prices and all other descriptions are subject to change without notice.

Photos presented may vary from actual products.

No Warranty. Changes in type and quantity, ability to deliver as well as errors and literal mistakes are reserved.

ARRI, ARRI ARRI, das ARRI Logo, ARRIMAX, ARRISUN, EB, L-Series, MAX Technology, M-Series, POCKETPAR, True Blue, SkyPanel, SKYPANEL, T 12 and T 24 are registered Trademarks of Arnold & Richter Cine Technik GmbH & Co. Betriebs KG.

© 2018 Arnold & Richter Cine Technik GmbH & Co. Betriebs KG. Reproduction and circulation in whole or in parts without prior permission is prohibited. All rights reserved.

Lighting Sales

Arnold & Richter Cine Technik GmbH & Co. Betriebs KG

Ernst-Augustin-Strasse 12
12489 Berlin
Germany

Phone: +49 30 - 67 82 33 0
Fax: +49 30 - 67 82 33 99
E-Mail: emeai-lighting@arri.de
Web: www.arri.com

Technical Service

Arnold & Richter Cine Technik GmbH & Co. Betriebs KG

Pulvermühle
83071 Stephanskirchen
Germany

Phone: +49 8036 - 3009 3009
Fax: +49 8036 - 3009 3030
E-Mail: service-lighting@arri.de
Web: www.arri.com

Lighting Product Catalog 2018 V1.2 valid from September 13th 2018 until revoked.

TABLE OF CONTENTS

KITS	9
	LED KITS
S360-C Kits	10
L5 / LoCaster LED Kit I	12
L5 / LoCaster LED Kit II	13
L5 LED Kit III	14
LoCaster 2 Plus Kits	15
	TUNGSTEN KITS
ARRILITE 750 Plus Kits	16
ARRILITE 2000 Plus Kits	18
Softbank I Plus Kit	19
Softbank IV Plus Kit	20
ARRI 650/3 Kit	21
300/650 Fresnel Combo Kit	22
SETS	23
	DAYLIGHT SETS
M-Series Sets	24
Daylight Fresnel Sets	26
LED	29
	CASTER
Caster 2 Plus	30
	L-SERIES
L-Series L5	32
L-Series L7	36
L-Series L10	40


TABLE OF CONTENTS

LED	29
	SKYPANEL
	SkyPanel S30-C 44
	SkyPanel S30-RP 45
	SkyPanel S60-C 50
	SkyPanel S60-RP 51
	SkyPanel S120-C 56
	SkyPanel S360-C 60
	SkyPanel Remote Control 64
	SkyLink 65
	Stellar 66
DAYLIGHT	67
	M-SERIES
	M-Series M8 68
	M-Series M18 70
	M-Series M40 72
	M-Series M90 74
	ARRIMAX 18/12 76
	ARRISUN EVENT
	ARRISUN 5 EVENT 78
	ARRISUN 18 EVENT 80
	TRUE BLUE D
	True Blue D5 82
	True Blue D12 84
	True Blue D25 86
	True Blue D40 88
	DAYLIGHT FRESNEL
	ARRI Daylight 18/12 90
	COMPACT THEATER
	COMPACT 2500 Theater 92
	COMPACT 4000 Theater 94


TABLE OF CONTENTS

BALLASTS	97
	ELECTRONIC BALLASTS
	Electronic Ballasts – Max Range 98
	Electronic Ballasts – High Speed 99
	Electronic Ballasts – Basic 99
	Electronic Ballasts – Battery 99
	EVENT BALLASTS
	Electronic Ballasts – Event 100
TUNGSTEN	101
	ARRILITE PLUS
	ARRILITE 750 Plus 102
	ARRILITE 2000 Plus 104
	ARRI FRESNEL
	ARRI 150 106
	ARRI 300 Plus 108
	ARRI 650 Plus 110
	TRUE BLUE T
	True Blue T1 112
	True Blue T2 114
	True Blue T5 116
	TRUE BLUE ST
	True Blue ST1 118
	True Blue ST2/3 120
	True Blue ST5 122

TABLE OF CONTENTS

TUNGSTEN	101
	STUDIO T
	STUDIO T12 124
	STUDIO T24 126
	TRUE BLUE ST THEATER
	True Blue ST1/2 Theater 128
	True Blue ST5 Theater 129
PLA - PROFESSIONAL LIGHTING ACCESSORIES	131
	Cases (empty) 132
	Event Accessories & Adapters 134
	Cables 135
	Barndoors 138
	Filter Frames 140
	Spill Rings, Diffusion, Snoots & Louvers 141
	Accessory Holders, Speed Rings & Softboxes 144
	Conversion Filters, Phosphor Panels & Protective Glasses 148
	Lenses 150
	Scrims & Scrim Bags 153
	Lamps 156
	Stands, Wheels & Operating Poles 158
	Grip 160
	Lamphead Control 162
	Other Accessories 163

KITS

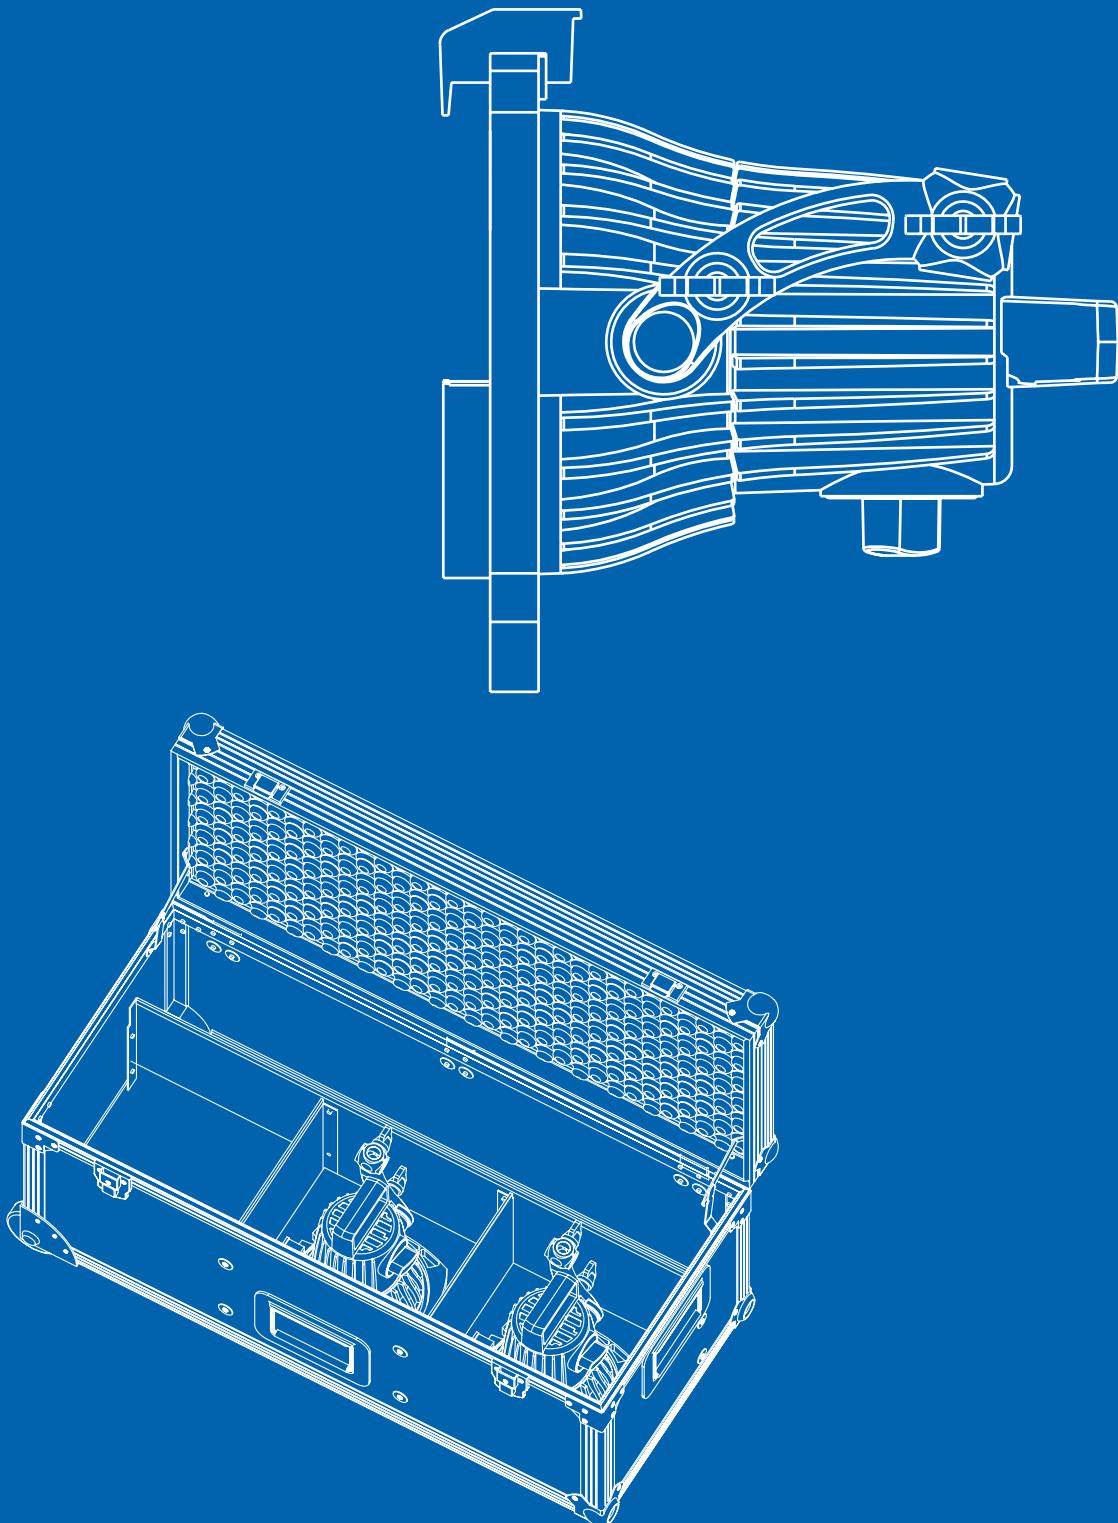

S360-C KITS NEW



S360-C KITS

Ident. No.	Description
L0.0016335	S360-C KIT
NEW	
1 x L1.0015122	S360-C, blue/silver
1 x L2.0016078	Carbon Fiber Yoke for S360-C (incl. Pin)
1 x L2.0015929	Short Yoke for S360-C (incl. Pin)
1 x L2.0015014	Standard Diffusion for S360-C
1 x L2.0015013	Heavy Diffusion for S360-C
1 x L2.0015016	Lite Diffusion for S360-C
1 x L2.0015022	Intensifier for S360-C
1 x L2.0014979	Honeycomb 60° for S360-C
1 x L2.0014978	Honeycomb 30° for S360-C
1 x L2.0015249	Power Supply Unit for S360-C
1 x L2.0006921	Super Clamp Adapter for SkyPanel PSU
1 x L2.0015784	Mains cable powerCON 32A, 3 m (Schuko)
1 x L2.0015785	Mains cable powerCON 32A, 3 m (Edison)
1 x L2.0016030	DC cable 5 m (4-Pin 30A) S360-C
1 x L2.0016354	Transportation Case for SkyPanel S360-C
1 x L2.0012973	SkyPanel Remote

S360-C KITS

KITS

Ident. No. Description

L0.0019704 **S360-C KIT (Schuko) - w/o Accessories** Schuko

NEW

1 x L1.0015122 S360-C, blue/silver

1 x L2.0016078 Carbon Fiber Yoke for S360-C (incl. Pin)

1 x L2.0015014 Standard Diffusion for S360-C

1 x L2.0015249 Power Supply Unit for S360-C

1 x L2.0006921 Super Clamp Adapter for SkyPanel PSU

1 x L2.0015784 Mains cable powerCON 32A, 3 m (Schuko)

1 x L2.0016030 DC cable 5 m (4-Pin 30A) S360-C

1 x L2.0016354 Transportation Case for SkyPanel S360-C

L0.0019705 **S360-C KIT (Bare Ends) - w/o Accessories**

Bare Ends

NEW

1 x L1.0015122 S360-C, blue/silver

1 x L2.0016078 Carbon Fiber Yoke for S360-C (incl. Pin)

1 x L2.0015014 Standard Diffusion for S360-C

1 x L2.0015249 Power Supply Unit for S360-C

1 x L2.0006921 Super Clamp Adapter for SkyPanel PSU

1 x L2.0015788 Mains cable powerCON 32A, 3 m (Bare Ends)

1 x L2.0016030 DC cable 5 m (4-Pin 30A) S360-C

1 x L2.0016354 Transportation Case for SkyPanel S360-C

L5 / LOCASTER LED KIT I



8-leaf barndoors depicted. Kit comes with 4-leaf barndoors.

L5 / LoCaster LED KIT I

Ident. No.	Description
L0.0003692	L5 / LoCaster LED Kit I
1 x L1.0001764	L5-C
2 x L1.0001329	LoCaster 2 Plus
1 x L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
1 x L2.79470.0	4-leaf barndoors (168 mm / 6.6")
1 x L2.79490.0	Filter frame (168 mm / 6.6")
2 x L2.30089.0	Caster stirrup with battery pack attachment
2 x L2.30061.0	2-leaf barndoors for Caster
2 x L2.30059.0	Gel frame, fits Caster-Series 2-leaf barndoors
2 x L2.30083.0	LoCaster power supply, max. 70 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 1 x 24 V... / 3 A (4-pin XLR)
2 x L2.30081.0	PowerDMX extension cable (XLR 4 pin), 3 m
2 x L2.0005202	Baby Pin with 3/8" Threaded Stud
1 x L2.0005201	Ceiling Scissor Clamp with 5/8" spigot
3 x L2.76965.0	Compact ARRI Kit Stand, LS.01 (050MKA)
1 x L2.0005222	Heavy Duty Case L5/Caster Kit

L5 / LOCASTER LED KIT II



8-leaf barndoors depicted. Kit comes with 4-leaf barndoors.

L5 / LoCaster LED KIT II

Ident. No.	Description
L0.0003691	L5 / LoCaster LED Kit II
2 x L1.0001764	L5-C
1 x L1.0001329	LoCaster 2 Plus
2 x L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
2 x L2.79470.0	4-leaf barndoors (168 mm / 6.6")
2 x L2.79490.0	Filter frame (168 mm / 6.6")
1 x L2.30089.0	Caster stirrup with battery pack attachment
1 x L2.30061.0	2-leaf barndoors for Caster
1 x L2.30059.0	Gel frame, fits Caster-Series 2-leaf barndoors
1 x L2.30083.0	LoCaster power supply, max. 70 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 1 x 24 V... / 3 A (4-pin XLR)
1 x L2.30081.0	PowerDMX extension cable (XLR 4 pin), 3 m
1 x L2.0005202	Baby Pin with 3/8" Threaded Stud
1 x L2.0005201	Ceiling Scissor Clamp with 5/8" spigot
3 x L2.76965.0	Compact ARRI Kit Stand, LS.01 (050MKA)
1 x L2.0005222	Heavy Duty Case L5/Caster Kit

L0.0003691	L5 / LoCaster LED Kit II	Schuko
2 x L1.0001764	L5-C	
1 x L1.0001329	LoCaster 2 Plus	
2 x L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch	
2 x L2.79470.0	4-leaf barndoors (168 mm / 6.6")	
2 x L2.79490.0	Filter frame (168 mm / 6.6")	
1 x L2.30089.0	Caster stirrup with battery pack attachment	
1 x L2.30061.0	2-leaf barndoors for Caster	
1 x L2.30059.0	Gel frame, fits Caster-Series 2-leaf barndoors	
1 x L2.30083.0	LoCaster power supply, max. 70 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 1 x 24 V... / 3 A (4-pin XLR)	
1 x L2.30081.0	PowerDMX extension cable (XLR 4 pin), 3 m	
1 x L2.0005202	Baby Pin with 3/8" Threaded Stud	
1 x L2.0005201	Ceiling Scissor Clamp with 5/8" spigot	
3 x L2.76965.0	Compact ARRI Kit Stand, LS.01 (050MKA)	
1 x L2.0005222	Heavy Duty Case L5/Caster Kit	

L5 LED KIT III



8-leaf barndoors depicted. Kit comes with 4-leaf barndoors.

L5 LED KIT III

Ident. No.	Description
L0.0003690	L5 LED Kit III
2 x L1.0001764	L5-C
2 x L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
2 x L2.79470.0	4-leaf barndoors (168 mm / 6.6")
2 x L2.79490.0	Filter frame (168 mm / 6.6")
2 x L2.76965.0	Compact ARRI Kit Stand, LS.01 (050MKA)
1 x L2.0005222	Heavy Duty Case L5/Caster Kit

LOCASTER 2 PLUS KITS



LOCASTER 2 PLUS KITS

Ident. No. Description

L0.0002336	LoCaster 2 Plus Kit	Schuko
------------	----------------------------	--------

- 1 x L1.0001329 LoCaster 2 Plus
with Onboard Control, 35 W, 11-36 V_{DC}
- 1 x L2.30083.0 LoCaster power supply, max. 70 W
Input: 100 - 240 V_{AC}, 50/60 Hz, Schuko-Plug
Output: 1 x 24 V_{DC} / 3 A (4-pin XLR)
- 1 x L2.30081.0 PowerDMX extension cable (XLR 4 pin), 3 m
- 1 x L2.30089.0 Caster Stirrup with battery attachment
- 1 x L2.30099.0 Light case for 1 x Caster & accessories, empty

L0.0002337	LoCaster 2 Plus Kit with Barndoar and Filter Frame	Schuko
------------	---	--------

- 1 x L1.0001329 LoCaster 2 Plus
with Onboard Control, 35 W, 11-36 V_{DC}
- 1 x L2.30083.0 LoCaster power supply, max. 70 W
Input: 100 - 240 V_{AC}, 50/60 Hz, Schuko-Plug
Output: 1 x 24 V_{DC} / 3 A (4-pin XLR)
- 1 x L2.30081.0 PowerDMX extension cable (XLR 4 pin), 3 m
- 1 x L2.30089.0 Caster stirrup with battery attachment
- 1 x L2.30061.0 2-leaf barndoar for Caster
- 1 x L2.30059.0 Gel frame, fits Caster-Series 2-leaf barndoar
- 1 x L2.30099.0 Light case for 1 x Caster & accessories, empty

ARRILITE 750 PLUS KITS



ARRILITE 750 PLUS LIGHTING KITS

Ident. No.	Description
L0.36700.D	ARRILITE 750 Plus, 3 Tungsten Lighting Kit - with wheels
	3 x L3.36700.D ARRILITE 750 Plus with line switch incl. 4-leaf barndoors and accessory holder
	3 x L2.36800.0 Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)
	3 x L2.76965.0 Compact ARRI Kit Stand AS-01 (050MKA)
	1 x L2.79460.0 Set of 4 Scrims (168 mm / 6.6 ")
	1 x L2.77180.0 ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)
	1 x L2.36806.R Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4") with wheels

L0.36700.0	ARRILITE 750 Plus, 3 Tungsten Lighting Kit
	3 x L3.36700.D ARRILITE 750 Plus with line switch incl. 4-leaf barndoors and accessory holder
	3 x L2.36800.0 Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)
	3 x L2.76965.0 Compact ARRI Kit Stand AS-01 (050MKA)
	1 x L2.79460.0 Set of 4 Scrims (168 mm / 6.6 ")
	1 x L2.77180.0 ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)
	1 x L2.36806.0 Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4")

ARRILITE 750 PLUS KITS

KITS

Ident. No.	Description	
L0.36700.B	ARRILITE 750 Plus, 3 Tungsten Lighting Kit - with wheels	Bare Ends
	3 x L3.36700.B ARRILITE 750 Plus with line switch incl. 4-leaf barndoors and accessory holder	
	3 x L2.36800.0 Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)	
	3 x L2.76965.0 Compact ARRI Kit Stand AS-01 (050MKA)	
	1 x L2.79460.0 Set of 4 Scrims (168 mm / 6.6 ")	
	1 x L2.77180.0 ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)	
	1 x L2.36806.R Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4") with wheels	
L0.36700.E	ARRILITE 750 Plus, 3 Tungsten Lighting Kit	Bare Ends
	3 x L3.36700.B ARRILITE 750 Plus with line switch incl. 4-leaf barndoors and accessory holder	
	3 x L2.36800.0 Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)	
	3 x L2.76965.0 Compact ARRI Kit Stand AS-01 (050MKA)	
	1 x L2.79460.0 Set of 4 Scrims (168 mm / 6.6 ")	
	1 x L2.77180.0 ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)	
	1 x L2.36806.0 Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4")	

ARRILITE 2000 PLUS KITS



ARRILITE 2000 PLUS LIGHTING KITS

Ident. No. Description

L0.36500.D	ARRILITE 2000 Plus, 2 Tungsten Lighting Kit	Schuko
2 x L3.36500.D	ARRILITE 2000 Plus with line switch incl. 4-leaf barndoors	
2 x L2.89212.0	Lamp 2000 W 230 V RX7s-21 FEX (Osram)	
1 x L2.76950.0	Set of 4 Scrims (254 mm / 10.0 ")	
1 x L2.77180.0	ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)	
1 x L2.76956.P	Case for 2 lampheads (70 x 39 x 37 cm / 27.6 x 15.4 x 14.6")	
L0.36500.B	ARRILITE 2000 Plus, 2 Tungsten Lighting Kit	Bare Ends
2 x L3.36500.B	ARRILITE 2000 Plus with line switch incl. 4-leaf barndoors	
2 x L2.89212.0	Lamp 2000 W 230 V RX7s-21 FEX (Osram)	
1 x L2.76950.0	Set of 4 Scrims (254 mm / 10.0 ")	
1 x L2.77180.0	ARRI Filter Pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)	
1 x L2.76956.P	Case for 2 lampheads (70 x 39 x 37 cm / 27.6 x 15.4 x 14.6")	

SOFTBANK I PLUS KIT



SOFTBANK I PLUS LIGHTING KIT

Ident. No. Description

L0.76597.S	Softbank I Plus Lighting Kit	Schuko
1 x	L3.79200.D ARRI 300 Plus with line switch incl. 4-leaf barndoors, filter frame	
2 x	L3.79400.D ARRI 650 Plus with line switch incl. 4-leaf barndoors, filter frame	
1 x	L3.36700.D ARRILITE 750 Plus with line switch incl. 4-leaf barndoors, accessory holder	
1 x	Lamp T 300 W / 240 V GY 9,5 CP/81 (Osram)	
2 x	Lamp T 650 W / 230 V GY 9,5 CP/89 (Osram)	
1 x	Lamp HPL* 750 W / 230 V G9,5 (Osram)	
1 x	Scrim, full single (130 mm / 5.1 ")	
1 x	Scrim, full double (130 mm / 5.1 ")	
3 x	Scrim, full single (168 mm / 6.6 ")	
3 x	Scrim, full double (168 mm / 6.6 ")	
1 x	Chimera Lightbank Video Pro Plus "S"	
4 x	Medium ARRI Kit Stand AS-2 (050A)	
1 x	Accessory Pack	
1 x	Heavy Duty Case with wheels (102 x 48 x 34 cm / 40.2 x 18.9 x 13.4")	

SOFTBANK IV PLUS KIT



SOFTBANK IV PLUS LIGHTING KIT

Ident. No. Description

L0.76599.S	Softbank IV Plus Lighting Kit	Schuko
2 x	L3.79360.D ARRI 150 with line switch incl. 4-leaf barndoors, filter frame	
1 x	L3.79200.D ARRI 300 Plus with line switch incl. 4-leaf barndoors, filter frame	
1 x	L3.79400.D ARRI 650 Plus with line switch incl. 4-leaf barndoors, filter frame	
1 x	L3.36700.D ARRILITE 750 Plus with line switch incl. 4-leaf barndoors, accessory holder	
2 x	Lamp T 150 W / 240 V GX 6,35 (Osram)	
1 x	Lamp T 300 W / 240 V GY 9,5 CP/81 (Osram)	
1 x	Lamp T 650 W / 230 V GY 9,5 CP/89 (Osram)	
1 x	Lamp HPL* 750 W / 230 V G9,5 (Osram)	
2 x	Scrim, full single (78 mm / 3.1")	
2 x	Scrim, full double (78 mm / 3.1")	
1 x	Scrim, full single (130 mm / 5.1 ")	
1 x	Scrim, full double (130 mm / 5.1 ")	
2 x	Scrim, full single (168 mm / 6.6")	
2 x	Scrim, full double (168 mm / 6.6")	
1 x	Chimera Lightbank Video Pro Plus "S"	
1 x	Accessory Pack	
1 x	Super Clamp with 5/8" Stud	
1 x	Ceiling Scissor Clamp	
4 x	Medium ARRI Kit Stand AS-2 (050A)	
1 x	Heavy Duty Case with wheels (102 x 48 x 34 cm / 40,2 x 18,9 x 13,4")	

ARRI 650/3 KIT



ARRI 650/3 LIGHTING KIT

Ident. No. Description

L0.79400.C	ARRI 650/3 Lighting Kit	Schuko
3 x	ARRI 650 Plus with line switch	
	incl. 4-leaf barndoors, filter frame	
3 x	Lamp T 650 W / 230 V GY 9,5 CP/89 (Osram)	
3 x	Scrim, full single (168 mm / 6.6")	
3 x	Scrim, full double (168 mm / 6.6")	
3 x	Compact ARRI Kit Stand AS-01 (050MKA)	
1 x	Compact 3-Light case with wheels (83 x 43 x 27 cm / 32.7 x 16.9 x 10.6")	

300/650 FRESNEL COMBO KIT





300/650 FRESNEL COMBO LIGHTING KIT

Ident. No. Description

L0.76598.F	300/650 Fresnel Combo Lighting Kit	Schuko
2 x	L3.79200.D ARRI 300 Plus with line switch incl. 4-leaf barndoor, filter frame	
2 x	L3.79400.D ARRI 650 Plus with line switch incl. 4-leaf barndoor, filter frame	
2 x	Lamp T 650 W / 230 V GY 9,5 CP/89 (Osram)	
2 x	Lamp T 300 W / 240 V GY 9,5 CP/81 (Osram)	
2 x	Scrim, full single (130 mm / 5.1 ")	
2 x	Scrim, full double (130 mm / 5.1 ")	
2 x	Scrim, full single (168 mm / 6.6 ")	
2 x	Scrim, full double (168 mm / 6.6 ")	
4 x	Medium ARRI Kit Stand AS-2 (050A)	
1 x	Accessory Pack	
1 x	Heavy Duty Case with wheels (102 x 48 x 34 cm / 40,2 x 18,9 x 13,4")	

SETS - LAMPHEAD, BALLAST & ACCESSORIES

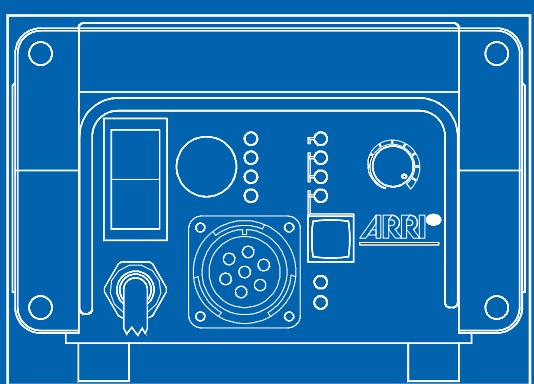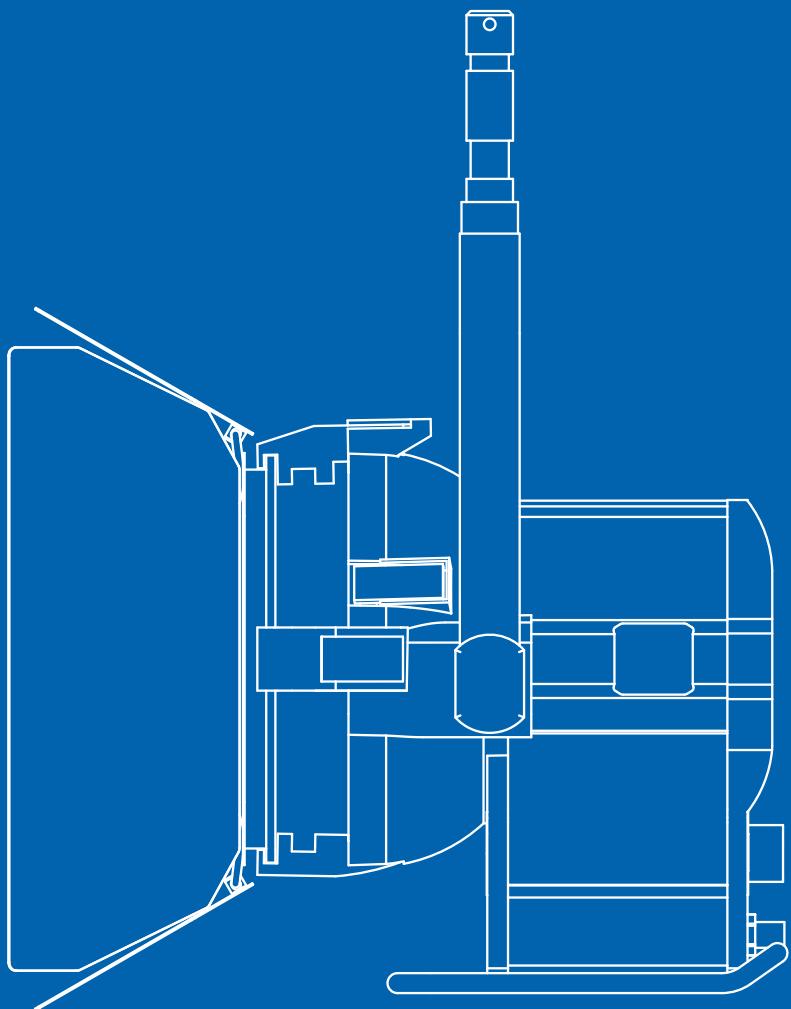

M-SERIES SETS



M-SERIES SETS

Ident. No. Description

L0.37200AS	M-Series M8 EB MAX Set	International (VEAM)
------------	-------------------------------	-------------------------

NEW

- 1 x L1.37200.B M-Series M8 (VEAM)
- 1 x L2.0014190 EB MAX 1.8 with ALF, CCL, DMX, AutoScan
- 1 x L2.39870.0 4-leaf barndoors, True Blue (245 mm / 9.7")
- 1 x L2.37207.0 Spill Rings (230 mm / 9.1")
- 1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m

L0.37200HS	M-Series M8 High Speed Set	International (VEAM)
------------	-----------------------------------	-------------------------

- 1 x L1.37200.B M8, blue/silver
- 1 x L2.76184KH EB 575/800 HS with ALF, CCL, DMX, 1000 Hz
- 1 x L2.39870.0 4-leaf barndoors, True Blue (245 mm / 9.7")
- 1 x L2.37207.0 Spill Rings (230 mm / 9.1")
- 1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m

L0.37600AS	M-Series M18 EB MAX Set	International (VEAM)
------------	--------------------------------	-------------------------

NEW

- 1 x L1.37600.B M18, blue/silver
- 1 x L2.0014190 EB MAX 1.8 with ALF, CCL, DMX, AutoScan
- 1 x L2.40950.0 4-leaf barndoors, True Blue (344 mm / 13.5")
- 1 x L2.37670.0 Spill Rings (330 mm / 13.0")
- 1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m

L0.37600.B	M-Series M18 Basic Set	International (VEAM)
------------	-------------------------------	-------------------------

- 1 x L1.37600.B M18, blue/silver
- 1 x L2.76625.0 EB 1200/1800 with ALF
- 1 x L2.40950.0 4-leaf barndoors, True Blue (344 mm / 13.5")
- 1 x L2.37670.0 Spill Rings (330 mm / 13.0")
- 1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m

M-SERIES SETS

SETS

Ident. No. Description

L0.0019656	M-Series M40 EB MAX Set	International (VEAM)
NEW		
1 x L1.37400.B	M40, blue/silver	
1 x L2.0016746	EB MAX 2.5/4 with ALF, CCL, DMX, AutoScan	
1 x L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")	
1 x L2.37305.0	Spill Rings (400 mm / 15.8")	
1 x L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m	
L0.0019657	M-Series M40 Basic Set	International (VEAM)
1 x L1.37400.B	M40, blue/silver	
1 x L2.76640.0	EB 2.5/4 with ALF	
1 x L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")	
1 x L2.37305.0	Spill Rings (400 mm / 15.8")	
1 x L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m	
L0.0019658	M-Series M90 EB MAX Set	International (VEAM)
NEW		
1 x L1.37489.B	M90, blue/silver	
1 x L2.0016747	EB MAX 6/9 with ALF, CCL, DMX, AutoScan	
1 x L2.37560.0	4-leaf barndoors (584 mm / 23.0")	
1 x L2.37561.0	Spill Rings (571 mm / 22.5")	
1 x L2.77940.A	Head-to-Ballast cable 6000/9000 W, 15 m	
L0.0019659	M-Series M90 Basic Set	International (VEAM)
1 x L1.37489.B	M90, blue/silver	
1 x L2.76180.0	EB 6/9 with ALF	
1 x L2.37560.0	4-leaf barndoors (584 mm / 23.0")	
1 x L2.37561.0	Spill Rings (571 mm / 22.5")	
1 x L2.77940.A	Head-to-Ballast cable 6000/9000 W, 15 m	
L0.0019667	ARRIMAX 18/12 EB MAX Set	International (VEAM)
NEW		
1 x L1.37950.B	ARRIMAX 18/12, blue/silver	
1 x L2.0016748	EB MAX 12/18 with ALF, DMX, AutoScan	
1 x L2.71100.0	4-leaf barndoors (740 mm / 29.1")	
1 x L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m	
L0.0019665	ARRIMAX 18/12 Basic Set	International (VEAM)
1 x L1.37950.B	ARRIMAX 18/12, blue/silver	
1 x L2.76290.0	EB 12/18 with ALF & trolley	
1 x L2.71100.0	4-leaf barndoors (740 mm / 29.1")	
1 x L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m	
L0.0019664	ARRIMAX 18/12 Basic Set-"Spot"	International (VEAM)
1 x L1.37950.B	ARRIMAX 18/12, blue/silver	
1 x L2.76290.0	EB 12/18 with ALF & trolley	
1 x L2.37941.0	Snoot (740 mm / 29.1") with variable frame	
1 x L2.37940.0	Spot reflector for ARRIMAX 18/12, 8° - 15° Half Peak Angle	
1 x L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m	

DAYLIGHT FRESNEL SETS



TRUE BLUE D SETS (DAYLIGHT FRESNEL SETS)

Ident. No. Description

L0.33770HS	True Blue D5 High Speed Set	International (VEAM)
	1 x L1.33770.B True Blue D5, blue/silver	
	1 x L2.76184KH EB 575/800 HS with ALF, DMX, CCL, 1000 Hz	
	1 x L2.39670.0 4-leaf barndoors, True Blue (197 mm / 7.8")	
	1 x L2.79690.0 Filter frame (197 mm / 7.8")	
	1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m	

L0.0001664	True Blue D5 Basic Set	International (VEAM)
	1 x L1.33770.B True Blue D5, blue/silver	
	1 x L2.76425.0 EB 575/1200 with ALF	
	1 x L2.39670.0 4-leaf barndoors, True Blue (197 mm / 7.8")	
	1 x L2.79690.0 Filter frame (197 mm / 7.8")	
	1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m	

L0.0019660	True Blue D12 EB MAX Set	International (VEAM)
NEW		
	1 x L1.33730.B True Blue D12, blue/silver	
	1 x L2.0014190 EB MAX 1.8 with ALF, CCL, DMX, AutoScan	
	1 x L2.39870.0 4-leaf barndoors, True Blue (245 mm / 9.7")	
	1 x L2.79890.0 Filter frame (230 mm / 9.1")	
	1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m	

L0.0001659	True Blue D12 Basic Set	International (VEAM)
	1 x L1.33730.B True Blue D12, blue/silver	
	1 x L2.76425.0 EB 575/1200 with ALF	
	1 x L2.39870.0 4-leaf barndoors, True Blue (245 mm / 9.7")	
	1 x L2.79890.0 Filter frame (230 mm / 9.1")	
	1 x L2.75600.0 Head-to-Ballast cable 575/800/1200/1800 W, 7 m	

TRUE BLUE D SETS (DAYLIGHT FRESNEL SETS)

Ident. No. Description

L0.0019662	True Blue D25 EB MAX Set	International (VEAM)
NEW	1 x L1.33670.B True Blue D25, blue/silver 1 x L2.0016746 EB MAX 2.5/4 with ALF, CCL, DMX, AutoScan 1 x L2.40950.0 4-leaf barndoors, True Blue (344 mm / 13.5") 1 x L2.80970.0 Filter frame (330 mm / 13.0") 1 x L2.75620.0 Head-to-Ballast cable 2500/4000 W, 7 m	

SETS

L0.33670XB	True Blue D25 Basic Set - "Baby"	International (VEAM)
	1 x L1.33670.B True Blue D25, blue/silver 1 x L2.76695.0 EB 2500 Baby with ALF 1 x L2.40950.0 4-leaf barndoors, True Blue (344 mm / 13.5") 1 x L2.80970.0 Filter frame (330 mm / 13.0") 1 x L2.75620.0 Head-to-Ballast cable 2500/4000 W, 7 m	

L0.0001662	True Blue D25 Basic Set	International (VEAM)
	1 x L1.33670.B True Blue D25, blue/silver 1 x L2.76640.0 EB 2.5/4 with ALF 1 x L2.40950.0 4-leaf barndoors, True Blue (344 mm / 13.5") 1 x L2.80970.0 Filter frame (330 mm / 13.0") 1 x L2.75620.0 Head-to-Ballast cable 2500/4000 W, 7 m	


L0.0019663	True Blue D40 EB MAX Set	International (VEAM)
NEW	1 x L1.34000.B True Blue D40, blue/silver 1 x L2.0016746 EB MAX 2.5/4 with ALF, CCL, DMX, AutoScan 1 x L2.41200.0 4-leaf barndoors, True Blue (413 mm / 16.3") 1 x L2.81220.0 Filter frame (400 mm / 15.8") 1 x L2.75620.0 Head-to-Ballast cable 2500/4000 W, 7 m	

L0.34000.X	True Blue D40 Basic Set	International (VEAM)
	1 x L1.34000.B True Blue D40, blue/silver 1 x L2.76640.0 EB 2.5/4 with ALF 1 x L2.41200.0 4-leaf barndoors, True Blue (413 mm / 16.3") 1 x L2.81220.0 Filter frame (400 mm / 15.8") 1 x L2.75620.0 Head-to-Ballast cable 2500/4000 W, 7 m	

L0.71160.X	ARRI Daylight 18/12 Basic Set	International (VEAM)
	1 x L1.71160.B ARRI Daylight 18/12, blue/silver 1 x L2.76290.0 EB 12/18 with ALF & trolley 1 x L2.71100.0 4-leaf barndoors (740 mm / 29.1") 1 x L2.71110.0 Filter frame (740 mm / 29.1") 1 x L2.82294.0 Head-to-Ballast cable 12/18/24 kW, 15 m	

This page is intentionally left blank.

LED

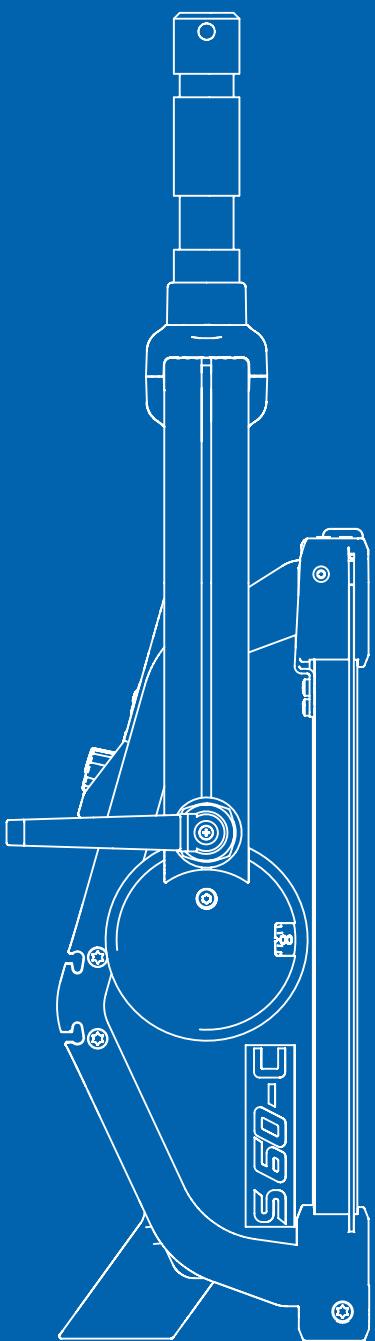

CASTER 2 PLUS

LED | CASTER SERIES



Type of Lamphead:	Floodlight
Lamp Type:	LED
Mounting:	Thread 3/8"
Size (HxWxL) /	96 x 70 x 218 mm /
Packed Size:	115 x 80 x 235 mm
Packed Volume:	0.002 m ³
Weight / Packed Weight:	approx. 1 kg / 1 kg
Protection Class / IP Rating:	III / IP20
Certifications:	CE, cNRTLus, FCC

LED

ALL VERSIONS INCLUDE

9,5 mm (3/8") Thread on device

LoCASTER 2 PLUS

4-pin XLR PowerDMX input (11 - 36 V_{dc})
ON/OFF switch with status indication
Control knobs for brightness, CCT (correlated color temperature)
and Green/Magenta correction

BROADCASTER 2 PLUS

4-pin PowerDMX Input
4-pin PowerDMX Output (Thru)
BCD selector with status indication, for DMX addressing or presets:

CCT (correlated color temperature):
Channel 900 - 2,800 K
Channel 901 - 3,200 K
Channel 902 - 4,000 K
Channel 903 - 4,800 K
Channel 904 - 5,600 K
Channel 905 - 6,500 K

NOT INCLUDED

Power supply (70 W or 300 W)
Power/DMX cables
any other accessories (have to be ordered separately)

CASTER 2 PLUS

Tuneable White (2,800 K - 6,500 K), Green-Magenta Adjustment

Ident. No. Description

L1.0001329	LoCaster 2 Plus	with Onboard Control	black	11 - 36 V _{dc}
L1.0002309	BroadCaster 2 Plus	with PowerDMX Control	black	11 - 36 V _{dc}

ACCESSORIES FOR CASTER 2 PLUS

LIGHT CONTROL:

Ident. No.	Description
L2.30061.0	2-leaf barndoors for Caster
L2.30059.0	Filter frame for Caster
L2.30058.0	Folding Intensifier for Caster

MOUNTING:

Ident. No.	Description
L2.30992.0	ARRI Swiveling / Noga Arm
L2.30089.0	Caster stirrup with battery pack attachment
L2.8803652	ARRI Super Clamp (035)
L2.88681.0	Adapter spigot, 1/4" + 3/8", female threads
L2.88639.0	Female Adapter for 16 mm (5/8") spigot with 3/8" stud
L2.30088.0	Adapter stud 16 mm + 120 mm for Gobo head mounting
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)
L2.30130.0	Multi Connector joining bracket with stud 16 mm / 5/8 ", for two Casters
L2.72937.0	Car power adapter for LoCaster, cigarette lighter (BSS) to XLR 4-pin

LED

KABEL:

Ident. No.	Description
L2.30081.0	Power-DMX cable (4-pin XLR), 3 m
L2.30071.0	Power-DMX cable (4-pin XLR), 5 m
L2.30105.0	Battery cable (4-pin XLR), 3 m (blau marking on cable)

STANDS:

Ident. No.	Description
L2.76975.0	Small ARRI Kit Stand LS.1 (050KA)
L2.8803653	Master Stand (1004BAC)

SAFETY:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0,6 m, max. load 5 kg

TRANSPORT:

Ident. No.	Description
L2.30099.0	Light case for 1 x Caster & accessories, empty

POWER SUPPLY:

Ident. No.	Description
L2.30083.0	LoCaster power supply, max. 70 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 1 x 24 V⎓ / 3 A (4-pin XLR)
L2.30084.0	BroadCaster power supply, max. 300 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 24 V⎓ / 6 A, 3 x PowerDMX (4-pin XLR)
L2.30085.0	LoCaster battery pack, rechargeable, NiMH 30 V⎓ / 81 Wh
L2.30086.0	LoCaster battery charger, 100 - 240 V~, 50/60 Hz



L-SERIES L5

FW
2.5

Type of Lamphead:	LED Fresnel
Lamp Type:	LED RGBW
Lens Diameter:	137 mm
Mounting:	Spigot 28 mm (short), 16 mm Socket
Size (HxWxL):	MAN: 321 x 278 x 280 mm / P.O.: 315 x 270 x 280 mm
Packed Size:	470 x 400 x 410 mm
Packed Volume:	0.08 m³
Weight / Packed Weight:	MAN: approx. 5 kg / 6 kg P.O.: approx. 7 kg / 7 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

powerCON TRUE1 mains cable
 Onboard control panel
 5-pin DMX in and thru connector
 4-pin battery connector (22 - 36 V_{dc})
 16 mm / 28 mm Combo Pin (Baby 5/8" / Junior 1 1/8" Combo Pin)

STAND-MOUNT

3 m (10 ft) mains cable with Schuko connector and line switch

HANGING

1.5 m (5 ft) mains cable with Bare Ends

POLE OPERATED (P.O.)

1.5 m (5 ft) mains cable with Bare Ends
 Pole Operation for pan, tilt and focus

NOT INCLUDED

Barndoors (have to be ordered separately)

L5-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0001955	L5-C	Stand-Mount	blue/silver	Schuko
L0.0001958	L5-C	Hanging	blue/silver	Bare Ends
L0.0001954	L5-C	Hanging	black	Bare Ends
L0.0001953	L5-C	P.O.	blue/silver	Bare Ends
L0.0001952	L5-C	P.O.	black	Bare Ends

L5-TT

Tuneable Tungsten - Tuneable White (2,600 K - 3,600 K) and Green-Magenta Adjustment

Ident. No. Description

L0.0001979	L5-TT	Stand-Mount	blue/silver	Schuko
L0.0001982	L5-TT	Hanging	blue/silver	Bare Ends
L0.0001978	L5-TT	Hanging	black	Bare Ends
L0.0001977	L5-TT	P.O.	blue/silver	Bare Ends
L0.0001976	L5-TT	P.O.	black	Bare Ends

L-SERIES L5

L5-DT

Tuneable Daylight - Tuneable White (5,000 K - 6,500 K) and Green-Magenta Adjustment

Ident. No. Description

L0.0001990	L5-DT	Stand-Mount	blue/silver	Schuko
L0.0001992	L5-DT	Hanging	blue/silver	Bare Ends
L0.0001988	L5-DT	Hanging	black	Bare Ends
L0.0001987	L5-DT	P.O.	blue/silver	Bare Ends
L0.0001986	L5-DT	P.O.	black	Bare Ends

ACCESSORIES FOR L-SERIES L5

LED

LIGHT CONTROL:

Ident. No. Description

L2.79470.0	4-leaf barndoors (168 mm / 6.6")
L2.79471.0	4-leaf barndoors, black/silver (168 mm / 6.6")
L2.79500.0	8-leaf barndoors (168 mm / 6.6")
L2.79490.0	Filter frame (168 mm / 6.6")
L2.79480.0	Snoot (168 mm / 6.6")

SOFTBOXES:

Ident. No. Description

L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.89068.0	Speed ring circular (9670) (168 mm / 6,6")

MOUNTING:

Ident. No. Description

L2.40701.3	Spigot 28 mm, long, with flange & allen screw, fits profile stirrups without sleeve cuff
------------	--

CABLES:

Ident. No. Description

L2.0001485	Mains cable, 1.5 m, powerCON TRUE1 / Bare Ends
L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
L2.0001487	Mains cable, 7 m, powerCON TRUE1 / Edison, with line switch
L2.0008904	Mains cable, 3 m, powerCON TRUE1 / Japanese, with line switch
L2.0003678	Mains cable, 3 m, powerCON TRUE1 / Chinese, with line switch
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

ACCESSORIES FOR L-SERIES L5

STANDS:

Ident. No.	Description
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPHEAD CONTROL:

Ident. No.	Description	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

LED

This page is intentionally left blank.



L-SERIES L7



FW
2.5

Type of Lamphead:	LED Fresnel
Lamp Type:	LED RGBW
Lens Diameter:	175 mm
Mounting:	Spigot 28 mm
Size (HxWxL):	MAN: 423 x 374 x 349 mm / P.O.: 448 x 352 x 351 mm
Packed Size:	480 x 400 x 400 mm
Packed Volume:	0.08 m ³
Weight / Packed Weight:	MAN: approx. 8 kg / 13 kg P.O.: approx. 10 kg / 14 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus, FCC, PSE

LE2

Light Engine 2 with improved brightness

ALL VERSIONS INCLUDE

powerCON TRUE1 mains cable
Onboard control panel
5-pin DMX in and thru connector
28 mm (1 1/8") Junior Pin

STAND-MOUNT

3 m (10 ft) mains cable with Schuko connector and line switch

HANGING

1.5 m (5 ft) mains cable with Bare Ends

POLE OPERATED (P.O.)

1.5 m (5 ft) mains cable with Bare Ends
Pole Operation for pan, tilt and focus

NOT INCLUDED

Barndoors (have to be ordered separately)

L7-C LE2

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0015233	L7-C	LE2	Stand Mount	blue/silver	Schuko
L0.0015232	L7-C	LE2	Hanging	blue/silver	Bare Ends
L0.0015217	L7-C	LE2	Hanging	black	Bare Ends
L0.0015234	L7-C	LE2	P.O.	blue/silver	Bare Ends
L0.0015216	L7-C	LE2	P.O.	black	Bare Ends

L-SERIES L7

L7-TT

Tuneable Tungsten - Tuneable White (2,600 K to 3,600 K) and Green-Magenta Adjustment

Ident. No. Description

L0.0015227	L7-TT	Stand Mount	blue/silver	Schuko
L0.0015225	L7-TT	Hanging	blue/silver	Bare Ends
L0.0015231	L7-TT	Hanging	black	Bare Ends
L0.0015228	L7-TT	P.O.	blue/silver	Bare Ends
L0.0015230	L7-TT	P.O.	black	Bare Ends

L7-DT

Tuneable Daylight - Tuneable White (5,000 K - 6,500 K) and Green-Magenta Adjustment

Ident. No. Description

L0.0015219	L7-DT	Stand Mount	blue/silver	Schuko
L0.0015218	L7-DT	Hanging	blue/silver	Bare Ends
L0.0015223	L7-DT	Hanging	black	Bare Ends
L0.0015220	L7-DT	P.O.	blue/silver	Bare Ends
L0.0015222	L7-DT	P.O.	black	Bare Ends

LED

ACCESSORIES FOR L-SERIES L7

LIGHT CONTROL:

Ident. No. Description

L2.39670.0	4-leaf barndoors, True Blue (197 mm / 7.8")
L2.39700.0	8-leaf barndoors, True Blue (197 mm / 7.8")
L2.79690.0	Filter frame (197 mm / 7.8")
L2.79680.0	Snoot (197 mm / 7.8")

SOFTBOXES:

Ident. No. Description

L2.89053.0	Chimera Lightbank Daylite Plus "S", incl. 3 front screens (8225)
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.76246.0	Speed ring circular (9190) (197 mm / 7,8")
L2.89060.0	Speed ring circular (9192) (197 mm / 7,8")

MOUNTING:

Ident. No. Description

L2.40701.3	Spigot 28 mm, long, with flange & allen screw, fits profile stirrups w/o sleeve cuff
------------	--

ACCESSORIES FOR L-SERIES L7

CABLES:

Ident. No.	Description
L2.0001485	Mains cable, 1.5 m, powerCON TRUE1 / Bare Ends
L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
L2.0001487	Mains cable, 7 m, powerCON TRUE1 / Edison, with line switch
L2.0008904	Mains cable, 3 m, powerCON TRUE1 / Japanese, with line switch
L2.0003678	Mains cable, 3 m, powerCON TRUE1 / Chinese, with line switch
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

LED

STANDS:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.8803653	Master Stand (1004BAC)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

MISCELLANEOUS:

Ident. No.	Description
L2.0003894	L7-C LE2 Upgrade: Brightness Upgrade for L7-C with "first generation" Light Engine
L2.0005922	L7-C LE2 Upgrade - Hybrid Version: Brightness Upgrade for L7-C Hybrid with "first generation" Light Engine

LAMPHEAD CONTROL:

Ident. No.	Description	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

This page is intentionally left blank.

FW
2.5

LED | L-SERIES



L-SERIES L10

Type of Lamphead:	LED Fresnel
Lamp Type:	LED RGBW
Lens Diameter:	274 mm
Mounting:	Spigot 28 mm
Size (HxWxL):	MAN: 581 x 490 x 560 mm / P.O.: 604 x 490 x 560 mm
Packed Size:	660 x 595 x 665 mm
Packed Volume:	0.25 m³
Weight / Packed Weight:	MAN: approx. 19 kg / 26 kg P.O.: approx. 21 kg / 27 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus, FCC, PSE

LED

ALL VERSIONS INCLUDE

powerCON TRUE1 mains cable
Onboard control panel
5-pin DMX in and thru connector
28 mm (1 1/8") spigot (Junior Pin)

STAND-MOUNT

3 m (10 ft) mains cable with Schuko connector and line switch

HANGING

1.5 m (5 ft) mains cable with Bare Ends

POLE OPERATED (P.O.)

1.5 m (5 ft) mains cable with Bare Ends
Pole Operation for pan, tilt and focus

NOT INCLUDED

Barndoors (have to be ordered separately)

L10-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0003382	L10-C	Stand-Mount	blue/silver	Schuko
L0.0003383	L10-C	Hanging	blue/silver	Bare Ends
L0.0003384	L10-C	Hanging	black	Bare Ends
L0.0003385	L10-C	P.O.	blue/silver	Bare Ends
L0.0003386	L10-C	P.O.	black	Bare Ends

L10-TT

Tuneable Tungsten - Tuneable White (2,600 K - 3,600 K) and Green-Magenta Adjustment

Ident. No. Description

L0.0003388	L10-TT	Stand-Mount	blue/silver	Schuko
L0.0003389	L10-TT	Hanging	blue/silver	Bare Ends
L0.0003390	L10-TT	Hanging	black	Bare Ends
L0.0003391	L10-TT	P.O.	blue/silver	Bare Ends
L0.0003392	L10-TT	P.O.	black	Bare Ends

L-SERIES L10

L10-DT

Tuneable Daylight - Tuneable White (5,000 K - 6,500 K) and Green-Magenta Adjustment

Ident. No. **Description**

L0.0003394	L10-DT	Stand-Mount	blue/silver	Schuko
L0.0003395	L10-DT	Hanging	blue/silver	Bare Ends
L0.0003396	L10-DT	Hanging	black	Bare Ends
L0.0003397	L10-DT	P.O.	blue/silver	Bare Ends
L0.0003398	L10-DT	P.O.	black	Bare Ends

ACCESSORIES FOR L-SERIES L10

LED

LIGHT CONTROL:

Ident. No. **Description**

L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.80951.0	4-leaf barndoors, black/silver (344 mm / 13.5")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture
L2.0008983	Spill Ring L10 (329 mm / 12.9")

SOFTBOXES:

Ident. No. **Description**

L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.89055.0	Chimera Lightbank Quartz Plus "M", incl. 3 front screens (8435)
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")

MOUNTING:

Ident. No. **Description**

L2.76989.0	ARRI Swiveling C Clamp (C150)
------------	-------------------------------

CABLES:

Ident. No. **Description**

L2.0001485	Mains cable, 1.5 m, powerCON TRUE1 / Bare Ends
L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
L2.0001487	Mains cable, 7 m, powerCON TRUE1 / Edison, with line switch
L2.0008904	Mains cable, 3 m, powerCON TRUE1 / Japanese, with line switch
L2.0003678	Mains cable, 3 m, powerCON TRUE1 / Chinese, with line switch
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

ACCESSORIES FOR L-SERIES L10

STANDS:

Ident. No.	Description
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A)
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPHEAD CONTROL:

Ident. No.	Description	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

LED

This page is intentionally left blank.

FW
4

LED | SKYPANEL



SKYPANEL S30-C

Type of Lamphead:	LED Soft Light
Lamp Type:	RGBW LED Light Engine
Light Aperture:	355 x 300 mm
Mounting:	Spigot 28 mm (short), 16 mm Socket
Size (HxWxL) /	507 x 133 x 426 mm /
Packed Size:	670 x 293 x 458 mm
Packed Volume:	0,09 m ³
Weight /	MAN: approx. 8 kg / 14 kg
Packed Weight (incl. PSU):	P.O.: approx. 9 kg / 16 kg
Protection Class / IP Rating:	III / IP20
Certifications:	CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S30 Power Supply Unit (PSU)	Onboard control panel
DC header cable (3-pin XLR)	5-pin DMX in and thru connector (XLR)
powerCON TRUE1 mains cable	4-pin DC battery input (XLR)
Rail Mount Adapter for SkyPanel PSU	EtherCon LAN Connector
Standard Diffusion Panel	USB-A Connector

MANUAL

Aluminum Yoke with 16 mm / 28 mm Combo Pin (Baby 5/8" / Junior 1 1/8" Combo Pin)
3 m DC header cable
3 m (10 ft) mains cable with Schuko connector

POLE OPERATED (P.O.)

Steel Yoke with 28 mm Junior Pin
1 m DC header cable
3 m (10 ft) mains cable with Bare Ends
Pole Operation for pan and tilt

NOT INCLUDED

Barndoors, Eggcrates and extra Diffusions must be ordered separately

SkyPanel S30-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0007712	S30-C	MAN	blue/silver	Schuko
L0.0007714	S30-C	P.O.	blue/silver	Bare Ends
L0.0007716	S30-C	P.O.	black	Bare Ends

DIFFUSION AND INTENSIFIER: See the following pages for more S30-C accessories.

Ident. No. Description

L2.0007325	Standard Diffusion for SkyPanel S30 - 107° HPA*
L2.0007326	Heavy Diffusion for SkyPanel for S30 - 114° HPA*
L2.0007327	Lite Diffusion for SkyPanel for S30 - 105° HPA*
L2.0007823	Intensifier for SkyPanel S30-C - 73° HPA*
L2.0008309	Accessory Bag for SkyPanel S30 panels (for max. 4 panels or honeycombs)
L0.0008468	Diffusion Kit S30 (Lite & Heavy Diffusion, Intensifier & Panel Carrying Bag)



SKYPANEL S30-RP

Type of Lamphead:	LED Soft Light
Lamp Type:	Blue LED Light Engine (for Remote Phosphor Panels)
Light Aperture:	355 x 300 mm
Mounting:	Spigot 28 mm (short), 16 mm Socket
Size (HxWxL) /	507 x 133 x 426 mm /
Packed Size:	670 x 293 x 458 mm
Packed Volume:	0,09 m³
Weight /	MAN: approx. 8 kg / 14 kg
Packed Weight (incl. PSU):	P.O.: approx. 9 kg / 16 kg
Protection Class / IP Rating:	III / IP20
Certifications:	CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S30 Power Supply Unit (PSU)	Onboard control panel
DC header cable (3-pin XLR)	5-pin DMX in and thru connector (XLR)
powerCON TRUE1 mains cable	4-pin DC battery input (XLR)
Rail Mount Adapter for SkyPanel PSU	EtherCon LAN Connector
Remote Phosphor Panel (3,200 or 5,600 K)	USB-A Connector

MANUAL

Aluminum Yoke with 16 mm / 28 mm Combo Pin (Baby 5/8" / Junior 1 1/8" Combo Pin)
3 m DC header cable
3 m (10 ft) mains cable with Schuko connector

POLE OPERATED (P.O.)

Steel Yoke with 28 mm Junior Pin
1 m DC header cable
3 m (10 ft) mains cable with Bare Ends
Pole Operation for pan and tilt

NOT INCLUDED

Barndoors, Eggcrates und extra Remote Phosphor Panels must be ordered separately

SkyPanel S30-RP

White Light - Interchangeable Remote Phosphor Panels (3,200 K or 5,600 K)

Ident. No. Description

L0.0007718	S30-RP	3,200 K	MAN	blue/silver	Schuko
L0.0007721	S30-RP	3,200 K	P.O.	blue/silver	Bare Ends
L0.0007722	S30-RP	3,200 K	P.O.	black	Bare Ends
L0.0007724	S30-RP	5,600 K	MAN	blue/silver	Schuko
L0.0007726	S30-RP	5,600 K	P.O.	blue/silver	Bare Ends
L0.0007727	S30-RP	5,600 K	P.O.	black	Bare Ends

REMOTE PHOSPHOR: See the following pages for more S30 accessories.

Ident. No. Description

L2.0007520	Remote Phosphor Panel for SkyPanel S30-RP - 2,700 K
L2.0007521	Remote Phosphor Panel for SkyPanel S30-RP - 3,200 K
L2.0007522	Remote Phosphor Panel for SkyPanel S30-RP - 4,300 K
L2.0007523	Remote Phosphor Panel for SkyPanel S30-RP - 5,600 K
L2.0007524	Remote Phosphor Panel for SkyPanel S30-RP - 6,500 K
L2.0007789	Remote Phosphor Panel for SkyPanel S30-RP - 10,000 K
L2.0007525	Remote Phosphor Panel for SkyPanel S30-RP - Chroma Green
L2.0008309	Accessory Bag for SkyPanel S30 panels (for max. 4 panels or honeycombs)

ACCESSORIES FOR S30-C AND S30-RP

LIGHT CONTROL:

Ident. No.	Description
L2.0008187	4-leaf barndoors for SkyPanel S30
L2.0013877	FlexDoor for SkyPanel S30
L2.0008048	4-Chamber Eggcrate for SkyPanel S30
L2.0008064	Honeycomb 60° for SkyPanel S30
L2.0008065	Honeycomb 30° for SkyPanel S30
L2.0008019	Snoot for SkyPanel S30
L2.0008189	Extra Diffusion Slot for SkyPanel S30
L2.0010271	SkyBender for SkyPanel S30-C*

LED

SOFTBOXES:

Ident. No.	Description	
L2.0008142	DoPchoice SnapGrid 40° for SkyPanel S30	
L2.0008140	DoPchoice SnapGrid 40° for SnapBag SkyPanel S30	
L2.0008141	DoPchoice SnapBag for SkyPanel S30	
L2.0020274	DoPchoice Octa 4 for S30	NEW
L2.0020275	DoPchoice SnapGrid 40° for Octa 4	NEW
L2.0015899	Chimera Lantern with Skirt for SkyPanel S30	
L2.0020498	Chimera POP Bank for S30	NEW
L2.0021388	Chimera Lightbank with Brackets for SkyPanel S30	NEW
L2.0015977	Chimera Universal Brackets for SkyPanel (suitable for S30 / S60 / S120)	NEW

MOUNTING:

Ident. No.	Description
L2.0008078	Center Mount Yoke
L2.0008080	Fixed Center Mount Yoke
L2.0014136	SkyPanel Side Handles (2 pcs.)
L2.0015050	SkyPanel Center Mount Handling Kit (incl. Center Mount Yoke and SkyPanel Side Handles)
L2.0008184	Double Vertical Yoke for SkyPanel S30
L2.0008082	Rail Mount Adapter for SkyPanel PSU
L2.0006921	Super Clamp Adapter for SkyPanel PSU
L2.0016445	SkyPanel Adapter Kit for Motorization

CABLES:

Ident. No.	Description
L2.0007492	DC cable 0.5 m (XLR3) SkyPanel
L2.0007491	DC cable 1 m (XLR3) SkyPanel
L2.0007493	DC cable 3 m (XLR3) SkyPanel
L2.0007494	DC cable 10 m (XLR3) SkyPanel
L2.0007860	DC cable 15 m (XLR3) SkyPanel

ACCESSORIES FOR S30-C AND S30-RP

CABLES:

Ident. No.	Description
L2.0010633	Daisy Chain Cable, 3 m, powerCON TRUE1 / CE
L2.0012548	Daisy Chain Cable, 3 m, powerCON TRUE1 / UL
L2.0012663	Daisy Chain Cable, 3 m, powerCON TRUE1 / Japan
L2.0007516	Mains cable, 3 m, powerCON TRUE1 / Schuko
L2.0007515	Mains cable, 3 m, powerCON TRUE1 / Edison
L2.0007514	Mains cable, 3 m, powerCON TRUE1 / Chinese
L2.0005974	Mains cable, 3 m, powerCON TRUE1 / Bare Ends
L2.0010231	Mains cable, 3 m, powerCON TRUE1 / Japanese
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

LED

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

TRANSPORT:

Ident. No.	Description
L2.0010639	Case for SkyPanel S30 - Molded Single
L2.0010640	Case for SkyPanel S30 - Molded Double
L2.0008309	Accessory Bag for SkyPanel S30 panels (for max. 4 panels or honeycombs)

BATTERY ADAPTERS:

Ident. No.	Description
L2.0008070	V-Mount Battery Adapter Plate
L2.0008071	Battery Adapter Plate for Anton/Bauer

POWER SUPPLY:

Ident. No.	Description
L2.0007735	Power Supply Unit for SkyPanel S30 - blue/silver
L2.0007886	Power Supply Unit for SkyPanel S30 - black

LAMPHEAD CONTROL:

Ident. No.	Description	
L2.0012973	SkyPanel Remote	
L2.0013861	SkyPanel Remote USB cable, 5 m	
L2.0013945	SkyPanel Remote Carrying Pouch	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

LED

This page is intentionally left blank.

FW
4

LED | SKYPANEL



SKYPANEL S60-C

Type of Lamphead:	LED Soft Light
Lamp Type:	RGBW LED Light Engine
Light Aperture:	645 x 300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	433 x 825 x 133 mm /
Packed Size:	460 x 856 x 300 mm
Packed Volume:	0.11 m ³
Weight /	MAN: approx. 13 kg / 21 kg
Packed Weight (incl. PSU):	P.O.: approx. 14 kg / 22 kg
Protection Class / IP Rating:	III / IP20
Certifications:	CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S60/S120-C Power Supply Unit (PSU)	Onboard control panel
DC header cable (3-pin XLR)	5-pin DMX in and thru connector (XLR)
powerCON TRUE1 mains cable	4-pin DC battery input (XLR)
Rail Mount Adapter for SkyPanel PSU	EtherCon LAN Connector
Standard Diffusion Panel	USB-A Connector

MANUAL

Aluminum Yoke and 28 mm Junior Pin
3 m DC header cable
3 m (10 ft) mains cable with Schuko connector

POLE OPERATED (P.O.)

Steel Yoke and 28 mm Junior Pin
1 m DC header cable
3 m (10 ft) mains cable with Bare Ends
Pole Operation for pan and tilt

NOT INCLUDED

Barndoors, Eggcrates and extra Diffusions must be ordered separately

SkyPanel S60-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0007064	S60-C	MAN	blue/silver	Schuko
L0.0007066	S60-C	P.O.	blue/silver	Bare Ends
L0.0007067	S60-C	P.O.	black	Bare Ends

DIFFUSION AND INTENSIFIER: See the following pages for more S60-C accessories.

Ident. No. Description

L2.0003345	Standard Diffusion for SkyPanel S60 - 107° HPA*
L2.0003903	Heavy Diffusion for SkyPanel S60 - 114° HPA*
L2.0003904	Lite Diffusion for SkyPanel S60 - 105° HPA*
L2.0007818	Intensifier for SkyPanel S60-C - 73° HPA*
L2.0008306	Accessory Bag for SkyPanel S60 panels (for max. 4 panels or honeycombs)
L0.0008461	Diffusion Kit S60 (Lite & Heavy Diffusion, Intensifier & Panel Carrying Bag)



SKYPANEL S60-RP

FW
4

Type of Lamphead:	LED Soft Light
Lamp Type:	Blue LED Light Engine (for Remote Phosphor Panels)
Light Aperture:	645 x 300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	433 x 825 x 133 mm /
Packed Size:	460 x 856 x 300 mm
Packed Volume:	0.11 m ³
Weight /	MAN: approx. 13 kg / 21 kg
Packed Weight (incl. PSU):	P.O.: approx. 14 kg / 22 kg
Protection Class / IP Rating:	III / IP20
Certifications:	CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S60/S120-C Power Supply Unit (PSU)	Onboard control panel
DC header cable (3-pin XLR)	5-pin DMX in and thru connector (XLR)
powerCON TRUE1 mains cable	4-pin DC battery input (XLR)
Rail Mount Adapter for SkyPanel PSU	EtherCon LAN Connector
Remote Phosphor Panel (3,200 or 5,600 K)	USB-A Connector

MANUAL

Aluminum Yoke and 28 mm Junior Pin
3 m DC header cable
3 m (10 ft) mains cable with Schuko connector

POLE OPERATED (P.O.)

Steel Yoke and 28 mm Junior Pin
1 m DC header cable
3 m (10 ft) mains cable with Bare Ends
Pole Operation for pan and tilt

NOT INCLUDED

Barndoors, Eggcrates and extra Remote Phosphor Panels must be ordered separately

SkyPanel S60-RP

White Light - Interchangeable Remote Phosphor Panels (3,200 K or 5,600 K)

Ident. No. Description

L0.0007069	S60-RP	3,200 K	MAN	blue/silver	Schuko
L0.0007071	S60-RP	3,200 K	P.O.	blue/silver	Bare Ends
L0.0007072	S60-RP	3,200 K	P.O.	black	Bare Ends
L0.0007074	S60-RP	5,600 K	MAN	blue/silver	Schuko
L0.0007076	S60-RP	5,600 K	P.O.	blue/silver	Bare Ends
L0.0007077	S60-RP	5,600 K	P.O.	black	Bare Ends

REMOTE PHOSPHOR: See the following pages for more S60-RP accessories.

Ident. No. Description

L2.0003347	Remote Phosphor Panel for SkyPanel S60-RP - 2,700 K
L2.0003348	Remote Phosphor Panel for SkyPanel S60-RP - 3,200 K
L2.0003349	Remote Phosphor Panel for SkyPanel S60-RP - 4,300 K
L2.0003350	Remote Phosphor Panel for SkyPanel S60-RP - 5,600 K
L2.0003346	Remote Phosphor Panel for SkyPanel S60-RP - 6,500 K
L2.0007778	Remote Phosphor Panel for SkyPanel S60-RP - 10,000 K
L2.0003351	Remote Phosphor Panel for SkyPanel S60-RP - Chroma Green
L2.0008306	Accessory Bag for SkyPanel S60 panels (for max. 4 panels or honeycombs)

ACCESSORIES FOR S60-C AND S60-RP

LIGHT CONTROL:

Ident. No.	Description
L2.0007530	4-leaf barndoors for SkyPanel S60
L2.0013878	FlexDoor for SkyPanel S60
L2.0007977	8-Chamber Eggcrate for SkyPanel S60
L2.0008058	Honeycomb 60° for SkyPanel S60
L2.0008059	Honeycomb 30° for SkyPanel S60
L2.0007999	Snoot for SkyPanel S60
L2.0008188	Extra Diffusion Slot for SkyPanel S60
L2.0009611	SkyBender for SkyPanel S60-C*

LED

SOFTBOXES:

Ident. No.	Description	
L2.0008144	DoPchoice SnapGrid 40° for SkyPanel S60	
L2.0008143	DoPchoice SnapGrid 40° for SnapBag SkyPanel S60	
L2.0008145	DoPchoice SnapBag for SkyPanel S60	
L2.0016159	DoPchoice Octa 5 for S60 (no Bracket)	NEW
L2.0016163	DoPchoice Octa 5 for S60 (incl. Bracket)	NEW
L2.0020276	DoPchoice SnapGrid 40° for Octa 5	NEW
L2.0016165	DoPchoice Octa 7 for S60 (no Bracket)	NEW
L2.0016160	DoPchoice Octa 7 for S60 (incl. Bracket)	NEW
L2.0020277	DoPchoice SnapGrid 40° for Octa 7	NEW
L2.0015900	Chimera Lantern with Skirt for SkyPanel S60	
L2.0020499	Chimera POP Bank for SkyPanel S60	NEW
L2.0021390	Chimera Shallow Lightbank with Brackets for SkyPanel S60	NEW
L2.0021389	Chimera Lightbank with Brackets for S60	NEW
L2.0015977	Chimera Universal Brackets for SkyPanel (suitable for S30 / S60 / S120)	NEW

MOUNTING:

Ident. No.	Description
L2.0008078	Center Mount Yoke
L2.0008080	Fixed Center Mount Yoke
L2.0014136	SkyPanel Side Handles (2 pcs.)
L2.0015050	SkyPanel Center Mount Handling Kit (incl. Center Mount Yoke and SkyPanel Side Handles)
L2.0008098	Double Vertical Yoke for SkyPanel S60
L2.0008082	Rail Mount Adapter for SkyPanel PSU
L2.0006921	Super Clamp Adapter for SkyPanel PSU
L2.0014566	Space Light Silk Mounting Adapter for SkyPanel S60
L2.0016445	SkyPanel Adapter Kit for Motorization

ACCESSORIES FOR S60-C AND S60-RP

CABLES:

Ident. No.	Description
L2.0007492	DC cable 0.5 m (XLR3) SkyPanel
L2.0007491	DC cable 1 m (XLR3) SkyPanel
L2.0007493	DC cable 3 m (XLR3) SkyPanel
L2.0007494	DC cable 10 m (XLR3) SkyPanel
L2.0007860	DC cable 15 m (XLR3) SkyPanel
L2.0010633	Daisy Chain Cable, 3 m, powerCON TRUE1 / CE
L2.0012548	Daisy Chain Cable, 3 m, powerCON TRUE1 / UL
L2.0012663	Daisy Chain Cable, 3 m, powerCON TRUE1 / Japan
L2.0007516	Mains cable, 3 m, powerCON TRUE1 / Schuko
L2.0007515	Mains cable, 3 m, powerCON TRUE1 / Edison
L2.0007514	Mains cable, 3 m, powerCON TRUE1 / Chinese
L2.0005974	Mains cable, 3 m, powerCON TRUE1 / Bare Ends
L2.0010231	Mains cable, 3 m, powerCON TRUE1 / Japanese
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

LED

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

TRANSPORT:

Ident. No.	Description
L2.0015848	Case for SkyPanel S60 - Molded Single V2
L2.0008306	Accessory Bag for SkyPanel S60 panels (for max. 4 panels or honeycombs)

BATTERY ADAPTERS:

Ident. No.	Description
L2.0008070	V-Mount Battery Adapter Plate
L2.0008071	Battery Adapter Plate for Anton/Bauer

POWER SUPPLY:

Ident. No.	Description
L2.0012491	Power Supply Unit for SkyPanel S60/S120-C - blue/silver
L2.0012492	Power Supply Unit for SkyPanel S60/S120-C - black

ACCESSORIES FOR S60-C AND S60-RP

LAMPHEAD CONTROL:

Ident. No.	Description	
L2.0012973	SkyPanel Remote	
L2.0013861	SkyPanel Remote USB cable, 5 m	
L2.0013945	SkyPanel Remote Carrying Pouch	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

LED

This page is intentionally left blank.

FW
4

LED | SKYPANEL



SKYPANEL S120-C

Type of Lamphead:	LED Soft Light
Lamp Type:	RGBW LED Light Engine
Light Aperture:	1290 x 300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	473 x 1467 x 133 mm /
Packed Size:	500 x 1500 x 300 mm
Packed Volume:	0.225 m ³
Weight /	MAN: approx. 16 kg / 26 kg
Packed Weight (incl. PSU):	CENTER MOUNT: approx. 14 kg / 24 kg
Protection Class / IP Rating:	P.O.: approx. 20 kg / 29 kg
Certifications:	III / IP20 CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S60/S120-C Power Supply Unit (PSU)
DC header cable (3-pin XLR)
powerCON TRUE1 mains cable
Standard Diffusion
Onboard control panel

4-pin DC battery input (XLR)
5-pin DMX in and thru connector (XLR)
EtherCon LAN Connector
USB-A Connector

MANUAL

3 m DC header cable
3 m (10 ft) mains cable with Schuko connector
Rail Mount Adapter for SkyPanel PSU
Aluminium Yoke and 28 mm Junior Pin

CENTER MOUNT

3 m DC header cable
3 m (10 ft) mains cable with Schuko connector
Center Mount Yoke and 2 Side Handles

POLE OPERATED (P.O.)

1 m DC header cable
3 m (10 ft) mains cable with Bare Ends
Rail Mount Adapter for SkyPanel PSU
Pole Operation for pan and tilt

NOT INCLUDED

Barndoors, Eggcrates and extra Diffusion Panels must be ordered separately

SkyPanel S120-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No. Description

L0.0012954	S120-C	MAN	blue/silver	Schuko
L0.0012948	S120-C	Center Mount	blue/silver	Schuko
L0.0012953	S120-C	P.O.	blue/silver	Bare Ends
L0.0012952	S120-C	P.O.	black	Bare Ends

ACCESSORIES FOR S120-C

DIFFUSION AND INTENSIFIER:

Ident. No.	Description
L2.0009501	Standard Diffusion for SkyPanel S120-C - 107° HPA*
L2.0009500	Heavy Diffusion for SkyPanel S120-C - 114° HPA*
L2.0009502	Lite Diffusion for SkyPanel S120-C - 105° HPA*
L2.0009503	Intensifier for SkyPanel S120-C - 73° HPA*
L2.0013780	Accessory Bag for SkyPanel S120-C panels (for max. 4 panels or honeycombs)
L0.0015070	Diffusion Kit S120-C (Lite & Heavy Diffusion, Intensifier & Panel Carrying Bag)

LIGHT CONTROL:

Ident. No.	Description
L2.0010114	4-leaf barndoors for SkyPanel S120-C
L2.0012922	FlexDoor for SkyPanel S120-C
L2.0009690	16-Chamber Eggcrate for SkyPanel S120-C
L2.0009561	Honeycomb 60° for SkyPanel S120-C
L2.0009562	Honeycomb 30° for SkyPanel S120-C
L2.0009680	Snoot for SkyPanel S120-C
L2.0009681	Extra Diffusion Slot for SkyPanel S120-C
L2.0012833	Spill Frame for SkyPanel S120-C
L2.0010352	SkyBender for SkyPanel S120-C

LED

SOFTBOXES:

Ident. No.	Description
L2.0010382	DoPchoice SnapGrid 40x60° for SkyPanel S120-C
L2.0010383	DoPchoice SnapBag for SkyPanel S120-C
L2.0010381	DoPchoice SnapGrid 40° for SnapBag SkyPanel S120-C
L2.0013180	Chimera Lightbank with brackets for SkyPanel S120-C
L2.0021309	Chimera POP Bank for SkyPanel S120-C
L2.0015977	Chimera Universal Brackets for SkyPanel (suitable for S30 / S60 / S120)

NEW

NEW

MOUNTING:

Ident. No.	Description
L2.0008078	Center Mount Yoke
L2.0008080	Fixed Center Mount Yoke
L2.0014136	SkyPanel Side Handles (2 pcs.)
L2.0015050	SkyPanel Center Mount Handling Kit (incl. Center Mount Yoke and SkyPanel Side Handles)
L2.0010180	Double Vertical Yoke for SkyPanel S120-C
L2.0008082	Rail Mount Adapter for SkyPanel PSU
L2.0006921	Super Clamp Adapter for SkyPanel PSU
L2.0016445	SkyPanel Adapter Kit for Motorization

ACCESSORIES FOR S120-C

CABLES:

Ident. No.	Description
L2.0007492	DC cable 0.5 m (XLR3) SkyPanel
L2.0007491	DC cable 1 m (XLR3) SkyPanel
L2.0007493	DC cable 3 m (XLR3) SkyPanel
L2.0007494	DC cable 10 m (XLR3) SkyPanel
L2.0007860	DC cable 15 m (XLR3) SkyPanel
L2.0010633	Daisy Chain Cable, powerCON TRUE1, 3 m / CE
L2.0012548	Daisy Chain Cable, powerCON TRUE1, 3 m / UL
L2.0012663	Daisy Chain Cable, powerCON TRUE1, 3 m / Japanese
L2.0007515	Mains cable, 3 m, powerCON TRUE1 / Edison
L2.0007516	Mains cable, 3 m, powerCON TRUE1 / Schuko
L2.0007514	Mains cable, 3 m, powerCON TRUE1 / Chinese
L2.0005974	Mains cable, 3 m, powerCON TRUE1 / Bare Ends
L2.0010231	Mains cable, 3 m, powerCON TRUE1 / Japanese
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

LED

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

TRANSPORT:

Ident. No.	Description
L2.0013694	Case for SkyPanel S120-C - Molded, Center Mount
L2.0013695	Case for SkyPanel S120-C - Molded, Manual
L2.0013780	Accessory Bag for SkyPanel S120-C panels (for max. 4 panels or honeycombs)

BATTERY ADAPTERS:

Ident. No.	Description
L2.0008070	V-Mount Battery Adapter Plate
L2.0008071	Battery Adapter Plate for Anton/Bauer

POWER SUPPLY:

Ident. No.	Description
L2.0012491	Power Supply Unit for SkyPanel S60/S120-C - blue/silver
L2.0012492	Power Supply Unit for SkyPanel S60/S120-C - black

ACCESSORIES FOR S120-C

LAMPHEAD CONTROL:

Ident. No.	Description	
L2.0012973	SkyPanel Remote	
L2.0013861	SkyPanel Remote USB cable, 5 m	
L2.0013945	SkyPanel Remote Carrying Pouch	
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko	
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison	
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko	
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison	
-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

LED



SKYPANEL S360-C



**FW
4**

Type of Lamphead:	LED Soft Light
Lamp Type:	RGBW LED Light Engine
Light Aperture:	1280 x 870 mm
Mounting:	Spigot 28 mm
Size (HxWxL) / Packed Size:	1104 x 1481 x 203 mm / 1900 x 1060 x 380 mm
Packed Volume:	0.76 m ³
Weight / Packed Weight (incl. Acces.):	approx. 75 kg / approx. 100 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, ENEC, cNRTLus, FCC, PSE

ALL VERSIONS INCLUDE

S360-C Power Supply Unit (PSU)
5 m DC header cable (4-pin metal locking)
3 m powerCON 32 A mains cable
Super Clamp Adapter for SkyPanel PSU
Carbon Fibre Yoke and 28 mm Junior Pin
Standard Diffusion Panel or Intensifier

Onboard control panel
5-pin DMX in and thru connector (XLR)
EtherCon LAN Connector
USB-A Connector
LumenRadio CRMX (Wireless DMX)

NOT INCLUDED

Honeycombs and extra Diffusion Panels must be ordered separately

SkyPanel S360-C

Color Controllable - Tuneable White (2,800 K - 10,000 K), Green-Magenta Adjustment and Full RGBW Color Gamut

Ident. No.	Description
L0.0016326	S360-C
L0.0016329	S360-C
L0.0016331	S360-C
L0.0016334	S360-C
L0.0016335	S360-C Kit
L0.0019704	S360-C Kit
L0.0019705	S360-C Kit

Standard Diffusion	blue/silver	Schuko
Standard Diffusion	blue/silver	Bare Ends
Intensifier	blue/silver	Schuko
Intensifier	blue/silver	Bare Ends
Complete Kit*	blue/silver	Edison & Schuko
w/o Accessories*	blue/silver	NEW Schuko
w/o Accessories*	blue/silver	NEW Bare Ends

ACCESSORIES FOR S360-C

DIFFUSION AND INTENSIFIER:

Ident. No.	Description
L2.0015014	Standard Diffusion for SkyPanel S360-C - 107° HPA*
L2.0015013	Heavy Diffusion for SkyPanel S360-C - 114° HPA*
L2.0015016	Lite Diffusion for SkyPanel S360-C - 105° HPA*
L2.0015022	Intensifier for SkyPanel S360-C - 73° HPA*

LIGHT CONTROL:

Ident. No.	Description
L2.0014979	Honeycomb 60° for SkyPanel S360-C
L2.0014978	Honeycomb 30° for SkyPanel S360-C
L2.0016381	DoPchoice Snoot for SkyPanel S360-C
L2.0016383	DoPchoice SnapGrid 40° for SkyPanel S360-C
L2.0016382	DoPchoice SnapBox for SkyPanel S360-C

LED

SOFTBOXES:

Ident. No.	Description	
L2.0020278	DoPchoice SnapBag 6'x6' for SkyPanel S360-C	NEW
L2.0020279	DoPchoice SnapGrid 40° for SnapBag SkyPanel S360-C	NEW

MOUNTING:

Ident. No.	Description
L2.0006921	Super Clamp Adapter for SkyPanel PSU
L2.0015929	Short Yoke for SkyPanel S360-C (incl. Pin)

CABLES:

Ident. No.	Description
L2.0016030	DC cable 5 m (4-Pin 30A) SkyPanel S360-C
L2.0016031	DC cable 10 m (4-Pin 30A) SkyPanel S360-C
L2.0015784	Mains cable S360-C, 3 m, powerCON 32A / Schuko
L2.0015785	Mains cable S360-C, 3 m, powerCON 32A / Edison
L2.0015786	Mains cable S360-C, 3 m, powerCON 32A / Chinese
L2.0015787	Mains cable S360-C, 3 m, powerCON 32A / Japanese
L2.0015788	Mains cable S360-C, 3 m, powerCON 32A / Bare Ends

SAFETY:

Ident. No.	Description
L2.0009000	Safety cable (8 mm) 1 m, max. load 64 kg

TRANSPORT:

Ident. No.	Description
L2.0016354	Transportation Case for SkyPanel S360-C

ACCESSORIES FOR S360-C

POWER SUPPLY:

Ident. No.	Description
L2.0015249	Power Supply Unit for SkyPanel S360-C - blue/silver

LAMPHEAD CONTROL:

Ident. No.	Description
L2.0012973	SkyPanel Remote
L2.0013861	SkyPanel Remote USB cable, 5 m
L2.0013945	SkyPanel Remote Carrying Pouch
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison
-	Stellar - App Store monthly*
-	Stellar - App Store yearly*
-	Stellar - Google Play Store monthly*
-	Stellar - Google Play Store yearly*

LED

NEW

NEW

NEW

NEW

This page is intentionally left blank.

FEATURES

To remote control ARRI SkyPanel
Ergonomic design for handheld use
Mimics functions of onboard control panel
Magnet on back of remote allows for mounting to light stand

VERSION INCLUDES

5 m USB cable
D-ring
Lanyard
Carrying pouch
Magnetic holder
1/4"-20 thread



SKYPANEL REMOTE CONTROL

Mounting:	Magnet on back
Size (HxWxL) /	90 x 165 x 30 mm w/o knobs
Packed Size:	140 x 185 x 140 mm
Packed Volume:	0.004 m ³
Weight / Packed Weight:	0.25 kg / 0.64 kg
IP Rating:	IP20

SkyPanel REMOTE CONTROL

Ident. No. **Description**

L2.0012973	SkyPanel Remote
------------	-----------------

ACCESSORIES FOR REMOTE CONTROL:

Ident. No. **Description**

L2.0013861	SkyPanel Remote USB cable, 5 m
L2.0013945	SkyPanel Remote Carrying Pouch

SKYLINK



Lamphead wireless control:

Ident. No.	Description
L2.0016357	SkyLink Receiver
L2.0016359	SkyLink Base Station - Edison
L2.0016360	SkyLink Base Station - Schuko

L2.0016357	SkyLink Receiver
L2.0016359	SkyLink Base Station - Edison
L2.0016360	SkyLink Base Station - Schuko

ACCESSORIES FOR SKYLINK:

Ident. No.	Description
L2.0019288	SkyLink Wifi Range Extender

NEW

SKYLINK KITS:

Ident. No.	Description
L0.0020058	SkyLink 3 Receiver Kit (with Base Station)

Schuko

3 x L2.0016357	SkyLink Receivers incl. Antennas
3 x L2.0016370	Power Adapter for Receiver (USB/Schuko)
1 x L2.0016360	SkyLink Base Station with Power Supply and Antennas (Schuko)
1 x L2.0016425	Case with die-cut foam for Receiver and Base Station

L0.0020060	SkyLink 3 Receiver Kit (with Base Station)
------------	---

Edison

3 x L2.0016357	SkyLink Receivers incl. Antennas
3 x L2.0016369	Power Adapter for Receiver (USB/Edison)
1 x L2.0016359	SkyLink Base Station with Power Supply and Antennas (Edison)
1 x L2.0016425	Case with die-cut foam for Receiver and Base Station

L0.0020061	SkyLink 10 Receiver Kit (with Base Station)
------------	--

Schuko

10 x L2.0016357	SkyLink Receivers incl. Antennas
10 x L2.0016370	Power Adapter for Receiver (USB/Schuko)
1 x L2.0016360	SkyLink Base Station with Power Supply and Antennas (Schuko)
1 x L2.0016425	Case with die-cut foam for Receiver and Base Station

L0.0020062	SkyLink 10 Receiver Kit (with Base Station)
------------	--

Edison

10 x L2.0016357	SkyLink Receivers incl. Antennas
10 x L2.0016369	Power Adapter for Receiver (USB/Edison)
1 x L2.0016359	SkyLink Base Station with Power Supply and Antennas (Edison)
1 x L2.0016425	Case with die-cut foam for Receiver and Base Station

STELLAR

NEW**FEATURES**

Intuitive and well designed user interface
Native Color Selection
Fast and efficient workflow
Completes ARRI LED ecosystem
Auto Fixture Layout and Discovery


Brings Gels to the L-Series
Light Plot Fixture Selection
Save and share favorite colors
Store Lighting looks
Available on iOS and Android

www.arri.com/stellar

**STELLAR****Ident. No.** **Description**

-	Stellar - App Store monthly*	NEW
-	Stellar - App Store yearly*	NEW
-	Stellar - Google Play Store monthly*	NEW
-	Stellar - Google Play Store yearly*	NEW

DAYLIGHT

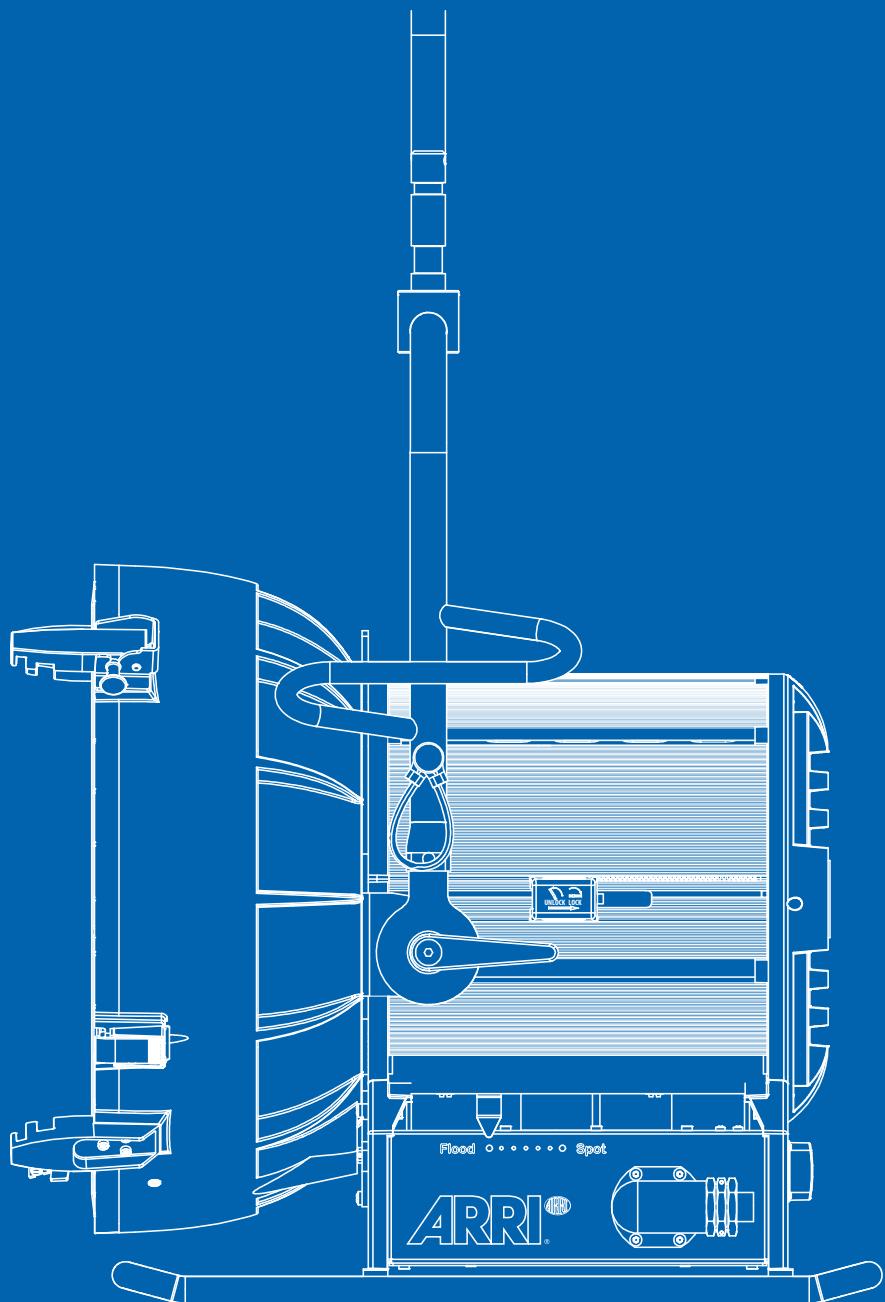

M-Series M8



Type of Lamphead:	Open Face with Facetted Reflector
Lamp Type:	ONLY Metal Halide 800 W/SE!
	No 575 W lamps!
Lamp Base:	G22
UV Protection Glass:	200 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	458 x 344 x 311 mm /
Packed Size:	440 x 400 x 460 mm
Packed Volume:	0.08 m ³
Weight / Packed Weight:	approx. 8 kg / 10 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

M-SERIES M8

(cable length 0.5 m, without barndoors)

Ident. No. Beschreibung

L1.37200.B	M8	MAN	blue/silver	International (VEAM)
------------	----	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0014190	EB MAX 1.8*	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~, Bare Ends
------------	-------------	-------------------------------	--------------------------	-------------------------	--------------------------

ELECTRONIC BALLASTS – HIGH SPEED

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76184KH	EB 575/800 HS	ALF, CCL, DMX	50/60/75/ 1000 Hz	International (VEAM)	120/230 V~ Schuko
L2.0001687	EB 575/800 HS	ALF, CCL, DMX	50/60/75/ 1000 Hz	International (VEAM)	120/230 V~ Bare Ends

ACCESSORIES FOR M-SERIES M8

DAYLIGHT

DIFFUSION:

Ident. No.	Description
L2.37208.0	Frosted glass (242 mm / 9.5")

LIGHT CONTROL:

Ident. No.	Description
L2.39870.0	4-leaf barndoors, True Blue (245 mm / 9.7")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.79860.0	Set of 4 scrims (230 mm / 9.1")
L2.79860.A	Scrim, full single (230 mm / 9.1")
L2.79860.B	Scrim, full double (230 mm / 9.1")
L2.79860.C	Scrim, half single (230 mm / 9.1")
L2.79860.D	Scrim, half double (230 mm / 9.1")
L2.37207.0	Spill Ring (230 mm / 9.1")
L2.79890.0	Filter frame (230 mm / 9.1")
L2.79880.0	Snoot (245 mm / 9.7") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89055.0	Chimera Lightbank Quartz Plus "M", incl. 3 front screens (8435)
L2.76248.0	Speed ring circular (9205) (245 mm / 9.7")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75600.0	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, International connector (VEAM)
L2.75600.C	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, International connector (VEAM)

STANDS:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003872	Lamp DIS 800 W/SE G22 UV-B (Koto)
L2.37240.0	Lamp HMI Digital 800 W/SEL G22 UVS (Osram)

M-Series M18



Type of Lamphead:	Open Face with Facetted Reflector
Lamp Type:	Metal Halide 1800 W/SE
Lamp Base:	G38
UV Protection Glass:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	567 x 387 x 388 mm /
Packed Size:	530 x 510 x 555 mm
Packed Volume:	0.15 m ³
Weight / Packed Weight:	approx. 11 kg / 16 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

M-SERIES M18

(cable length 0.5 m, without barndoors)

Ident. No. Description

L1.37600.B	M18	MAN	blue/silver	International (VEAM)
------------	-----	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0014190	EB MAX 1.8*	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~, Bare Ends
------------	-------------	-------------------------------	--------------------------	-------------------------	--------------------------

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76625.0	EB 1200/1800	ALF	50/60/75 Hz	International (VEAM)	120/230 V~ Schuko
------------	--------------	-----	-------------	-------------------------	----------------------

ACCESSORIES FOR M-SERIES M18

DIFFUSION:

Ident. No. Description

L2.0001006	Frosted glass (330 mm / 13.0")
------------	--------------------------------

LIGHT CONTROL:

Ident. No. Description

L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
------------	--

L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
------------	--

ACCESSORIES FOR M-SERIES M18

LIGHT CONTROL:

Ident. No.	Description
L2.80980.0	Set of 4 scrims (330 mm / 13.0")
L2.80980.A	Scrim, full single (330 mm / 13.0")
L2.80980.B	Scrim, full double (330 mm / 13.0")
L2.80980.C	Scrim, half single (330 mm / 13.0")
L2.80980.D	Scrim, half double (330 mm / 13.0")
L2.37670.0	Spill Ring (330 mm / 13.0")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.89055.0	Chimera Lightbank Quartz Plus "M", incl. 3 front screens (8435)
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75600.0	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, International connector (VEAM)
L2.75600.C	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, International connector (VEAM)

STANDS:

Ident. No.	Description
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003885	Lamp DIS 1200 W/SE G38 UV-B (Koto)
L2.89254L0	Lamp Digital HMI 1200 W/SE G38 UVS (Osram)
L2.0003884	Lamp DIS 1800 W/SE G38 (Koto)
L2.37590.0	Lamp HMI Digital 1800 W/SE G38 UVS (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.77572.2	Conversion Kit from M18 to AS18: PAR Reflector, three brackets and one top latch
L2.37682.2	Conversion Kit from AS18 to M18: MAX Reflector, three brackets and one top latch

M-Series M40



Type of Lamphead:	Open Face with Facetted Reflector
Lamp Type:	Metal Halide 4000 W/SE
	Metal Halide 2500 W/SE
Lamp Base:	G38
UV Protection Glass:	300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	670 x 402 x 511 mm /
Packed Size:	660 x 595 x 665 mm
Packed Volume:	0.25 m ³
Weight / Packed Weight:	approx. 19 kg / 23 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

M-SERIES M40

(cable length 0.5 m, without barndoors)

Ident. No. Description

L1.37400.B	M40	MAN	blue/silver	International (VEAM)
------------	-----	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0016746	EB MAX 2.5/4	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~, Bare Ends
------------	--------------	-------------------------------	--------------------------	-------------------------	--------------------------

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~, Bare Ends
------------	----------	-----	-------------	-------------------------	----------------------

ACCESSORIES FOR M-SERIES M40

LIGHT CONTROL:

Ident. No. Description

L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")
L2.81210.0	8-leaf barndoors (413 mm / 16.3")
L2.81230.0	Set of 4 scrims (400 mm / 15.8")
L2.81230.A	Scrim, full single (400 mm / 15.8")

ACCESSORIES FOR M-SERIES M40

LIGHT CONTROL:

Ident. No.	Description
L2.81230.B	Scrim, full double (400 mm / 15.8")
L2.81230.C	Scrim, half single (400 mm / 15.8")
L2.81230.D	Scrim, half double (400 mm / 15.8")
L2.37305.0	Spill Ring (400 mm / 15.8")
L2.81220.0	Filter frame (400 mm / 15.8")
L2.81225.0	Snoot (413 mm / 16.3") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89055.0	Chimera Lightbank Quartz Plus "M", incl. 3 front screens (8435)
L2.89062.0	Speed Ring circular (9365) (411 mm / 16.2")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)

STANDS:

Ident. No.	Description
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA)
L2.76959.0	Wheel set with brakes, Ø 75 mm / M10 mount with brakes (104)
L2.88096.0	Wheel set with brakes, Ø 160 mm / M10 mount with brakes (374)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.0003883	Lamp DIS 2500 W/SE G38 UV-B (Koto)
L2.89255.0	Lamp HMI 2500 W/SE XS G38 (Osram)
L2.0003882	Lamp DIS 4000 W/SE G38 UV-B (Koto)
L2.89256.0	Lamp HMI 4000 W/SE XS G38 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.37385.0	Conversion Kit from M40 to AS40: PAR Reflector, three brackets and one top latch
L2.37388.0	Conversion Kit from AS40 to M40: MAX Reflector, three brackets and one top latch



M-Series M90

Type of Lamphead:	Open Face with Facetted Reflector
Lamp Type:	Metal Halide 9000 W/SE
Lamp Base:	GX38
UV Protection Glass:	500 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	947 x 713 x 716 mm /
Packed Size:	930 x 790 x 910 mm
Packed Volume:	0.66 m ³
Weight / Packed Weight:	approx. 40 kg / 55 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

M-SERIES M90

(cable length 0.5 m, without barndoors)

Ident. No. Description

L1.37489.B	M90	MAN	blue/silver	International (VEAM)
------------	-----	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0016747	EB MAX 6/9	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
------------	------------	-------------------------------	--------------------------	-------------------------	-------------------------

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76180.0	EB 6/9	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	--------	-----	-------------	-------------------------	---------------------

ACCESSORIES FOR M-SERIES M90

LIGHT CONTROL:

Ident. No.	Description
L2.37560.0	4-leaf barndoors (584 mm / 23.0")
L2.0008688	Set of 4 scrims (571 mm / 22.5")
L2.0008690	Scrim, full single (571 mm / 22.5")
L2.0008689	Scrim, full double (571 mm / 22.5")
L2.0008692	Scrim, half single (571 mm / 22.5")
L2.0008691	Scrim, half double (571 mm / 22.5")
L2.37561.0	Spill Ring (571 mm / 22.5")

SOFTBOXES:

Ident. No.	Description
L2.37475.0	Speed Ring circular (9465) (581 mm / 22.9")

CABLES:

Ident. No.	Description
L2.77940.0	Head-to-Ballast cable 6000/9000 W, 7 m, International connector (VEAM)
L2.77940.A	Head-to-Ballast cable 6000/9000 W, 15 m, International connector (VEAM)

SAFETY:

Ident. No.	Description	Price / EURO
L2.0009000	Safety cable (8 mm) 1 m, max. load 64 kg	23 €

LAMPS:

Ident. No.	Description
L2.0003879	Lamp DIS 9000 W/SE G38 (Koto)
L2.37482.0	Lamp HMI 9000 W/SE XS GX38 (Osram)

ARRIMAX 18/12



Type of Lamphead:	Open Face with Facetted Reflector
Lamp Type:	Metal Halide 18000 W/SE
	Metal Halide 12000 W/SE
Lamp Base:	GX51 / GX38
UV Protection Glass:	630 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	1051 x 784 x 942 mm /
Packed Size:	1135 x 1050 x 1170 mm
Packed Volume:	1.4 m ³
Weight / Packed Weight:	approx. 65 kg / 101 kg (with pallet)
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

ARRIMAX 18/12

(cable length 0.5 m, without barndoors)

Ident. No.	Description
------------	-------------

L1.37950.B	ARRIMAX 18/12	MAN	blue/silver	International (VEAM)
------------	---------------	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No.	Description
------------	-------------

L2.0016748	EB MAX 12/18	ALF, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	230 V~, Bare Ends
------------	--------------	-----------------------	--------------------------	-------------------------	----------------------

NEW

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No.	Description
------------	-------------

L2.76290.0	EB 12/18	ALF, with trolley	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	----------------------	-------------	-------------------------	---------------------

ACCESSORIES FOR M-SERIES ARRIMAX 18/12

LIGHT CONTROL:

Ident. No.	Description
L2.71100.0	4-leaf barndoors (740 mm / 29.1")
L2.71115.0	Set of 4 scrims (740 mm / 29.1")
L2.71115.A	Scrim, full single (740 mm / 29.1")
L2.71115.B	Scrim, full double (740 mm / 29.1")
L2.71115.C	Scrim, half single (740 mm / 29.1")
L2.71115.D	Scrim, half double (740 mm / 29.1")
L2.37941.0	Snoot (740 mm / 29.1") with variable frame
L2.37940.0	Spot reflector for ARRIMAX 18/12, 8° - 15° Half Peak Angle

CABLES:

Ident. No.	Description
L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m, International connector (VEAM)
L2.82294.A	Head-to-Ballast/Dimmer cable 12/18/24 kW, 20 m, International connector (VEAM)

DAYLIGHT

SAFETY:

Ident. No.	Description	Price / EURO
L2.0015517	Safety cable (10 mm) 1 m, max. load 100 kg	24 €

LAMPS:

Ident. No.	Description
L2.0003880	Lamp DIS 12000 W/SE G38 UV-B (Koto)
L2.89261.0	Lamp HMI 12000 W/SE XS GX38 (Osram)
L2.0003877	Lamp DIS 18000 W/SE G51 (Koto)
L2.89262.0	Lamp HMI 18000 W/SE XS GX51 (Osram)



ARRISUN 5 EVENT

Type of Lamphead:	PAR
Lamp Type:	Metal Halide 575 W/SE
Lamp Base:	G22
UV Protection Glass:	180 mm
Mounting:	Spigot 16 mm
Size (HxWxL) /	344 x 259 x 295 mm /
Packed Size:	475 x 380 x 320 mm
Packed Volume:	0.06 m ³
Weight / Packed Weight:	approx. 5 kg / 6 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS

DAYLIGHT EVENT PAR LIGHTS

(cable length 0.5 m, without barndoors)

Ident. No.	Description			
L1.77871.E	ARRISUN 5 EVENT	silver	Schaltbau M1	
L1.77875.E	ARRISUN 5 EVENT	black	Schaltbau M1	

ELECTRONIC BALLASTS – EVENT

Ident. No.	Description				
L2.76259EV	EB 575 EVENT SINGLE	ALF	approx. 110 Hz	Schaltbau M1	120/230 V~ Schuko
L2.76340.0	EB 575 EVENT SIX	ALF, DMX	approx. 200 Hz	Schaltbau M3	120/230 V~ 3Ph+N, CEE 16 A
L2.76340HC	EB 575 EVENT SIX	ALF, DMX	approx. 200 Hz	Harting HAN 16	120/230 V~ 3Ph+N, CEE 16 A
L2.76341.0	Split Box EVENT SIX, 6 x 575 W (6 x 200 W, 3 x 1200 W), 6 x Schaltbau M1, 4 pole + PE 1 x Schaltbau M3, 12 pole + PE				

ACCESSORIES FOR ARRISUN 5 EVENT

DAYLIGHT

LIGHT CONTROL:

Ident. No.	Description
L2.79670.0	4-leaf barndoors (197 mm / 7.8")
L2.79671.0	4-leaf barndoors, black/silver (197 mm / 7.8")
L0.77863.0	4 DROP-IN lens set (175 mm / 6.9") (spot, narrow flood, flood, super flood)
L2.77864.0	DROP-IN lens, spot, blue (175 mm / 6.9")
L2.77866.0	DROP-IN lens, narrow flood, small rectangle, black (175 mm / 6.9")
L2.77868.0	DROP-IN lens, flood, large rectangle, green (175 mm / 6.9")
L2.77870.0	DROP-IN lens, super flood, honeycomb, red (175 mm / 6.9")
L2.77872.0	DROP-IN lens, super flood frosted, honeycomb, silver (175 mm / 6.9")

SOFTBOXES:

Ident. No.	Description
L2.89056.0	Chimera Lightbank Quartz Plus "L", incl. 3 front screens (8445)
L2.89077.0	Speed Ring circular (9445) (530 mm / 20.9")

MOUNTING:

Ident. No.	Description
L2.88726.0	ARRI Quick Action Super Clamp - black (635)
L2.88212.0	Double female adapter 16 mm - 17 mm Pin (E400) (LE.4000.A)
L2.74144.0	Ballast mount bracket with 16 mm socket

CABLES:

Ident. No.	Description
L2.76318.B	Extension cable EVENT 200/575/1200 W, 5 m, Schaltbau (M1, 4 pole + PE)
L2.76318.C	Extension cable EVENT 200/575/1200 W, 10 m, Schaltbau (M1, 4 pole + PE)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003874	Lamp DIS 575 W/SE G22 UV-B (Koto)
L2.89253L0	Lamp Digital HMI 575 W/SE G22 UVS (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.76786.0	Transmitter pendant module 575



ARRISUN 18 EVENT

Type of Lamphead:	PAR
Lamp Type:	Metal Halide 1800 W/SE Metal Halide 1200 W/SE
Lamp Base:	G38
UV Protection Glass:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	543 x 384 x 376 mm /
Packed Size:	550 x 510 x 690 mm
Packed Volume:	0.19 m ³
Weight / Packed Weight:	approx. 11 kg / 16 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

DAYLIGHT EVENT PAR LIGHTS

(cable length 0.5 m, without barndoors)

Ident. No.	Description	Colour	Connector
L1.37595.E	ARRISUN 18 EVENT	black	Schaltbau M1

ELECTRONIC BALLASTS – EVENT

Ident. No.	Description	ALF, EVENT THREE	DMX, CCL	approx. 200 Hz	Harting HAN 16	230 V~ 3Ph+N, CEE 16B
L2.37705.0	Split Box EVENT 1800 (3 x 1200 W or 3 x 1800 W) 3 x 1800 W: Schaltbau M1, 6 pole + PE 3 x 1200 W: Schaltbau M1, 4 pole + PE 1 x Harting HAN 16, 16 pole + PE					

ACCESSORIES FOR ARRISUN 18 EVENT

DAYLIGHT

LIGHT CONTROL:

Ident. No.	Description
L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.80950.0	4-leaf barndoors (344 mm / 13.5")
L2.80951.0	4-leaf barndoors, black/silver (344 mm / 13.5")
L0.76818.0	4 DROP-IN lens set (250 mm / 9.8"), incl. case (spot, narrow flood, flood, super flood)
L2.76821.0	DROP-IN lens, spot, blue (250 mm / 9.8")
L2.76822.0	DROP-IN lens, narrow flood, small rectangle, black (250 mm / 9.8")
L2.76823.0	DROP-IN lens, flood, large rectangle, green (250 mm / 9.8")
L2.76824.0	DROP-IN lens, super flood, honeycomb, red (250 mm / 9.8")
L2.76825.0	DROP-IN lens, super flood frosted, honeycomb, silver (250 mm / 9.8")
L2.76827.0	Lens case for 5 lenses, empty (36 x 21 x 41 cm)

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75600.F	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800
L2.75600.E	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003885	Lamp DIS 1200 W/SE G38 UV-B (Koto)
L2.89254L0	Lamp Digital HMI 1200 W/SE G38 UVS (Osram)
L2.0003884	Lamp DIS 1800 W/SE G38 (Koto)

MISCELLANEOUS:

Ident. No.	Description
L2.0000655	Conversion Kit ARRISUN 18 Event: Set of 4 longer brackets and spacers to adjust the optical quality to ARRISUN 12 (for lampheads purchased before April 2014)

TRUE BLUE D5



Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 575 W/SE
Lamp Base:	G22
Lens Diameter:	150 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	359 x 327 x 223 mm /
Packed Size:	390 x 390 x 360 mm
Packed Volume:	0.05 m ³
Weight / Packed Weight:	approx. 6 kg / 7 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

TRUE BLUE DAYLIGHT FRESNEL LIGHTS

(cable length 0.5 m, without barndoors)

Ident. No. Description

L1.33770.B	True Blue D5	MAN	blue/silver	International (VEAM)
L1.33770.F	True Blue D5	MAN	blue/silver	Schaltbau (GTV-Standard**)
L1.33775.B	True Blue D5	MAN	black	International (VEAM)
L1.33775.F	True Blue D5	MAN	black	Schaltbau (GTV-Standard**)

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0014190	EB MAX 1.8*	ALF, CCL, DMX, AutoScan	50/60/ 75/300/ 1000 Hz	International (VEAM)	115/230 V~, Bare Ends
------------	-------------	-------------------------------	------------------------------	-------------------------	--------------------------

ELECTRONIC BALLASTS – HIGH SPEED

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76184KH	EB 575/800 HS	ALF, CCL, DMX	50/60/75/ 1000 Hz	International (VEAM)	120/230 V~ Schuko
L2.0001687	EB 575/800 HS	ALF, CCL, DMX	50/60/75/ 1000 Hz	International (VEAM)	120/230 V~ Bare Ends

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76425.0	EB 575/1200	ALF	50/60/75 Hz	International (VEAM)	120/230 V~ Schuko
------------	-------------	-----	-------------	-------------------------	----------------------

ACCESSORIES FOR TRUE BLUE D5

LIGHT CONTROL:

Ident. No.	Description
L2.39670.0	4-leaf barndoors, True Blue (197 mm / 7.8")
L2.39700.0	8-leaf barndoors, True Blue (197 mm / 7.8")
L2.79660.0	Set of 4 scrims (197 mm / 7.8")
L2.79660.A	Scrim, full single (197 mm / 7.8")
L2.79660.B	Scrim, full double (197 mm / 7.8")
L2.79660.C	Scrim, half single (197 mm / 7.8")
L2.79660.D	Scrim, half double (197 mm / 7.8")
L2.79690.0	Filter frame (197 mm / 7.8")
L2.79680.0	Snoot (197 mm / 7.8") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.89053.0	Chimera Lightbank Daylite Junior Plus "S", incl. 3 front screens (8225)
L2.76246.0	Speed Ring circular (9190) (197 mm / 7.8")
L2.89060.0	Speed Ring circular (9192) (197 mm / 7.8")

DAYLIGHT

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)

CABLES:

Ident. No.	Description
L2.75600.0	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, International connector (VEAM)
L2.75600.F	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800 W
L2.75600.C	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, International connector (VEAM)
L2.75600.E	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800 W

STANDS:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003874	Lamp DIS 575 W/SE G22 UV-B (Koto)
L2.89253L0	Lamp Digital HMI 575 W/SE G22 UVS (Osram)



TRUE BLUE D12

Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 1200 W/SE
Lamp Base:	G38
Lens Diameter:	175 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	511 x 375 x 325 mm /
Packed Size:	460 x 400 x 650 mm
Packed Volume:	0.12 m ³
Weight / Packed Weight:	approx. 10 kg / 12 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

TRUE BLUE DAYLIGHT FRESNEL LIGHTS

(cable length approx. 0.5 m, without barndoors)

Ident. No. Description

L1.33730.B	True Blue D12	MAN	blue/silver	International (VEAM)
L1.33730.F	True Blue D12	MAN	blue/silver	Schaltbau (GTV-Standard**)
L1.33735.B	True Blue D12	MAN	black	International (VEAM)
L1.33735.F	True Blue D12	MAN	black	Schaltbau (GTV-Standard**)

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0014190	EB MAX 1.8*	ALF, CCL, DMX, AutoScan	50/60/ 75/300/ 1000 Hz	International (VEAM)	115/230 V~, Bare Ends
------------	-------------	-------------------------------	------------------------------	-------------------------	--------------------------

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76425.0	EB 575/1200	ALF	50/60/75 Hz	International (VEAM)	120/230 V~ Schuko
------------	-------------	-----	-------------	-------------------------	----------------------

ACCESSORIES FOR TRUE BLUE D12

LIGHT CONTROL:

Ident. No.	Description
L2.39870.0	4-leaf barndoors, True Blue (245 mm / 9.7")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.79860.0	Set of 4 scrims (230 mm / 9.1")
L2.79860.A	Scrim, full single (230 mm / 9.1")
L2.79860.B	Scrim, full double (230 mm / 9.1")
L2.79860.C	Scrim, half single (230 mm / 9.1")
L2.79860.D	Scrim, half double (230 mm / 9.1")
L2.79890.0	Filter frame (230 mm / 9.1")
L2.79880.0	Snoot (245 mm / 9.7") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.76248.0	Speed Ring circular (9205) (245 mm / 9.7")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75600.0	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, International connector (VEAM)
L2.75600.F	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800 W
L2.75600.C	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, International connector (VEAM)
L2.75600.E	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, Schaltbau M1 6 pole + PE, extension cable EVENT 1200/1800 W

STANDS:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.0003885	Lamp DIS 1200 W/SE G38 UV-B (Koto)
L2.89254L0	Lamp Digital HMI 1200 W/SE G38 UVS (Osram)

TRUE BLUE D25



Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 2500 W/SE
Lamp Base:	G38
Lens Diameter:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	643 x 464 x 390 mm /
Packed Size:	550 x 510 x 690 mm
Packed Volume:	0.19 m ³
Weight / Packed Weight:	approx. 14 kg / 18 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

Now with CCL support

TRUE BLUE DAYLIGHT FRESNEL LIGHTS

(cable length 0.6 m, without barndoors)

Ident. No. Description

L1.33670.B	True Blue D25	MAN	blue/silver	International (VEAM)
L1.33670.F	True Blue D25	MAN	blue/silver	Schaltbau (GTV-Standard*)
L1.33675.B	True Blue D25	MAN	black	International (VEAM)
L1.33675.F	True Blue D25	MAN	black	Schaltbau (GTV-Standard*)

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0016746	EB MAX 2.5/4 NEW	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
------------	----------------------------	-------------------------------	--------------------------	-------------------------	-------------------------

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	-----	-------------	-------------------------	---------------------

ACCESSORIES FOR TRUE BLUE D25

LIGHT CONTROL:

Ident. No.	Description
L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.80980.0	Set of 4 scrims (330 mm / 13.0")
L2.80980.A	Scrim, full single (330 mm / 13.0")
L2.80980.B	Scrim, full double (330 mm / 13.0")
L2.80980.C	Scrim, half single (330 mm / 13.0")
L2.80980.D	Scrim, half double (330 mm / 13.0")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")

CABLES:

Ident. No.	Description
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.F	Head-to-Ballast cable 2500/4000 W, 7 m, Schaltbau M3, 6 pol. + PE
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)
L2.75620.E	Head-to-Ballast cable 2500/4000 W, 15 m, Schaltbau M3, 6 pol. + PE

STANDS:

Ident. No.	Description
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.0003883	Lamp DIS 2500 W/SE G38 UV-B (Koto)
L2.89255.0	Lamp HMI 2500 W/SE XS G38 (Osram)



TRUE BLUE D40

Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 4000 W/SE
Lamp Base:	G38
Lens Diameter:	300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	727 x 534 x 403 mm /
Packed Size:	600 x 600 x 770 mm
Packed Volume:	0.28 m ³
Weight / Packed Weight:	approx. 18 kg / 22 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

Now with CCL support

TRUE BLUE DAYLIGHT FRESNEL LIGHTS

(cable length 0.6 m, without barndoors)

Ident. No. Description

L1.34000.B	True Blue D40	MAN	blue/silver	International (VEAM)
L1.34000.F	True Blue D40	MAN	blue/silver	Schaltbau (GTV-Standard*)
L1.34005.B	True Blue D40	MAN	black	International (VEAM)
L1.34005.F	True Blue D40	MAN	black	Schaltbau (GTV-Standard*)

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0016746	EB MAX 2.5/4	ALF, CCL, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
NEW					

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	-----	-------------	-------------------------	---------------------

ACCESSORIES FOR TRUE BLUE D40

LIGHT CONTROL:

Ident. No.	Description
L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")
L2.81210.0	8-leaf barndoors (413 mm / 16.3")
L2.81230.0	Set of 4 scrims (400 mm / 15.8")
L2.81230.A	Scrim, full single (400 mm / 15.8")
L2.81230.B	Scrim, full double (400 mm / 15.8")
L2.81230.C	Scrim, half single (400 mm / 15.8")
L2.81230.D	Scrim, half double (400 mm / 15.8")
L2.81220.0	Filter frame (400 mm / 15.8")
L2.81225.0	Snoot (413 mm / 16.3") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.89058.0	Chimera Lightbank Daylite Plus "M", incl. 3 front screens (8635)
L2.89059.0	Chimera Lightbank Daylite Plus "L", incl. 3 front screens (8645)
L2.89062.0	Speed Ring circular (9365) (411 mm / 16.2")

DAYLIGHT

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

CABLES:

Ident. No.	Description
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.F	Head-to-Ballast cable 2500/4000 W, 7 m, Schaltbau M3, 6 pol. + PE
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)
L2.75620.E	Head-to-Ballast cable 2500/4000 W, 15 m, Schaltbau M3, 6 pol. + PE

STANDS:

Ident. No.	Description
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA)
L2.76959.0	Wheel set with brakes, Ø 75 mm / M10 mount with brakes (104)
L2.88096.0	Wheel set with brakes, Ø 160 mm / M10 mount with brakes (374)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.0003882	Lamp DIS 4000 W/SE G38 UV-B (Koto)
L2.89256.0	Lamp HMI 4000 W/SE XS G38 (Osram)



ARRI DAYLIGHT 18/12

Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 18000 W/DE
	Metal Halide 12000 W/DE
Lamp Base:	S 30
Lens Diameter:	625 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	1058 x 1040 x 825 mm /
Packed Size:	1135 x 1170 x 1050 mm
Packed Volume:	1.39 m ³
Weight / Packed Weight:	approx. 70 kg / 114 kg (with pallet)
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, ENEC, cNRTLus

DAYLIGHT FRESNEL LIGHTS

(cable length 1 m, without barndoors)

Ident. No. Description

L1.71160.B	ARRI DAYLIGHT 18/12	MAN	blue/silver	International (VEAM)
------------	---------------------	-----	-------------	----------------------

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.0016748	EB MAX 12/18	ALF, DMX, AutoScan	50/60/75/ 300/1000 Hz	International (VEAM)	230 V~, Bare Ends
------------	--------------	-----------------------	--------------------------	-------------------------	----------------------

NEW

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle

Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No. Description

L2.76290.0	EB 12/18	ALF, with trolley	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	----------------------	-------------	-------------------------	---------------------

ACCESSORIES FOR ARRI DAYLIGHT 18/12

LIGHT CONTROL:

Ident. No.	Description
L2.71100.0	4-leaf barndoors (740 mm / 29.1")
L2.71115.0	Set of 4 scrims (740 mm / 29.1")
L2.71115.A	Scrim, full single (740 mm / 29.1")
L2.71115.B	Scrim, full double (740 mm / 29.1")
L2.71115.C	Scrim, half single (740 mm / 29.1")
L2.71115.D	Scrim, half double (740 mm / 29.1")
L2.71195.0	UV-protection glass Retrofit for ARRI Daylight 18/12; for the change from fresnel lens to UV-protection glass to get hard shadows

CABLES:

Ident. No.	Description
L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m, International connector (VEAM)
L2.82294.A	Head-to-Ballast/Dimmer cable 12/18/24 kW, 20 m, International connector (VEAM)

SAFETY:

Ident. No.	Description	Price / EURO
L2.0015517	Safety cable (10 mm) 1 m, max. load 100 kg	24 €

LAMPS:

Ident. No.	Description
L2.89260.0	Lamp HMI 18000 W/DE XS S30 (Osram)



COMPACT 2500 THEATER

Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 2500 W/SE
Lamp Base:	G38
Lens Diameter:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	770 x 590 x 396 mm /
Packed Size:	670 x 610 x 620 mm
Packed Volume:	0.25 m ³
Weight / Packed Weight:	approx. 23 kg / 27 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

DAYLIGHT FRESNEL LIGHTS FOR THEATER

(cable length 0.5 m, incl. theater cassette, without barndoors)

Ident. No. Description

L1.73680.B	COMPACT 2500 Theater	MAN	grey	International (VEAM)
L1.73680.F	COMPACT 2500 Theater	MAN	grey	Schaltbau (GTV-Standard**)
L1.73690.B	COMPACT 2500 Theater	MOT*	grey	International (VEAM)
L1.73690.F	COMPACT 2500 Theater	MOT*	grey	Schaltbau (GTV-Standard**)

ELECTRONIC BALLASTS – BASIC:

Ident. No. Description

L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	-----	-------------	-------------------------	---------------------

ACCESSORIES FOR COMPACT 2500 THEATER

LIGHT CONTROL:

Ident. No.	Description
L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture

CABLES:

Ident. No.	Description
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.F	Head-to-Ballast cable 2500/4000 W, 7 m, Schaltbau M3, 6 pol. + PE
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)
L2.75620.E	Head-to-Ballast cable 2500/4000 W, 15 m, Schaltbau M3, 6 pol. + PE

SAFETY:

Ident. No.	Description
L2.80866.0	Safety cable (6 mm) 1 m, max. load 36 kg

LAMPS:

Ident. No.	Description
L2.0003883	Lamp DIS 2500 W/SE G38 UV-B (Koto)
L2.89255.0	Lamp HMI 2500 W/SE XS G38 (Osram)



COMPACT 4000 THEATER

Type of Lamphead:	Fresnel
Lamp Type:	Metal Halide 4000 W/SE
Lamp Base:	G38
Lens Diameter:	300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	856 x 656 x 456 mm /
Packed Size:	695 x 725 x 775 mm
Packed Volume:	0.39 m ³
Weight / Packed Weight:	approx. 27 kg / 37 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

DAYLIGHT FRESNEL LIGHTS FOR THEATER

(cable length 0.5 m, incl. theater cassette, without barndoors)

Ident. No. Description

L1.74010.B	COMPACT 4000 Theater	MAN	grey	International (VEAM)
L1.74010.F	COMPACT 4000 Theater	MAN	grey	Schaltbau (GTV-Standard**)
L1.74020.B	COMPACT 4000 Theater	MOT*	grey	International (VEAM)
L1.74020.F	COMPACT 4000 Theater	MOT*	grey	Schaltbau (GTV-Standard**)

ELECTRONIC BALLASTS – BASIC:

Ident. No. Description

L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
------------	----------	-----	-------------	-------------------------	---------------------

* lamphead without stirrup; suitable for mounting of a motorized yoke by Licht-Technik

ACCESSORIES FOR COMPACT 4000 THEATER

LIGHT CONTROL:

Ident. No.	Description
L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")
L2.81210.0	8-leaf barndoors (413 mm / 16.3")
L2.81220.0	Filter frame (400 mm / 15.8")
L2.81225.0	Snoot (413 mm / 16.3") with variable aperture

CABLES:

Ident. No.	Description
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.F	Head-to-Ballast cable 2500/4000 W, 7 m, Schaltbau M3, 6 pol. + PE
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)
L2.75620.E	Head-to-Ballast cable 2500/4000 W, 15 m, Schaltbau M3, 6 pol. + PE

SAFETY:


Ident. No.	Description
L2.80866.0	Safety cable (6 mm) 1 m, max. load 36 kg

LAMPS:

Ident. No.	Description
L2.0003882	Lamp DIS 4000 W/SE G38 UV-B (Koto)
L2.89256.0	Lamp HMI 4000 W/SE XS G38 (Osram)

This page is intentionally left blank.

BALLASTS

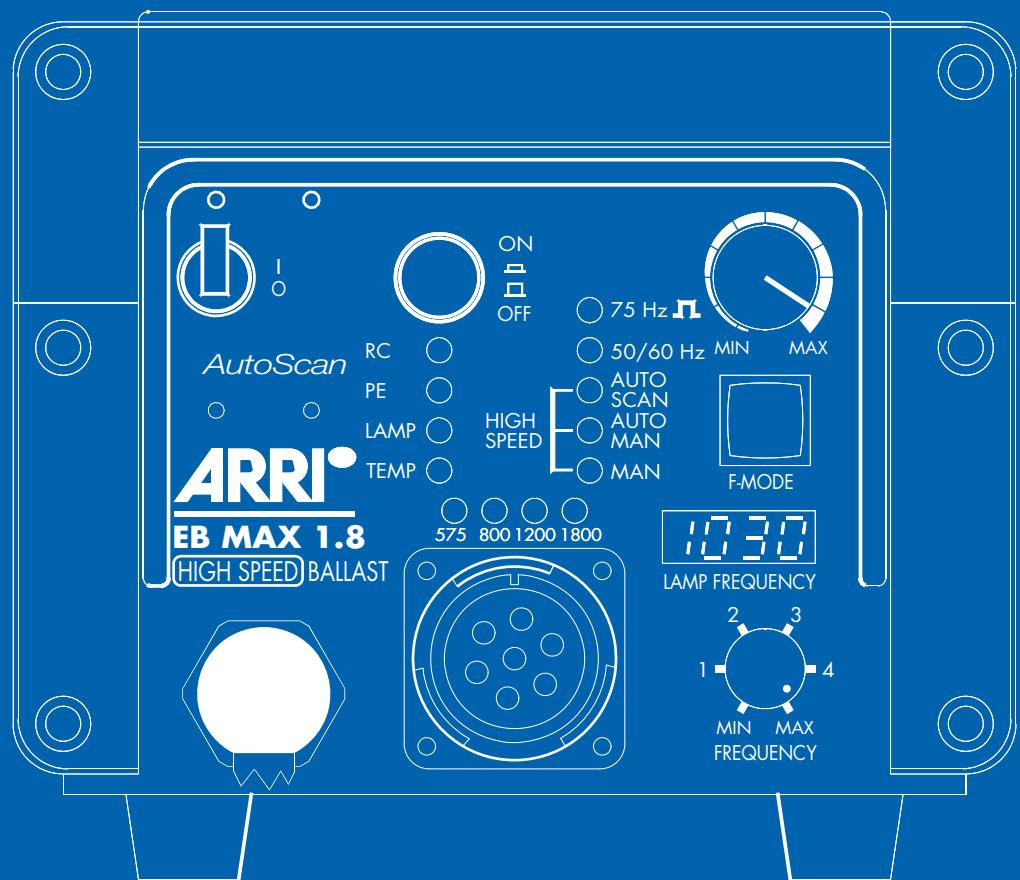

ELECTRONIC BALLASTS



FEATURES

ALF	Active Line Filter for correction of power factor
CCL	Compensation of Cable Losses
AUTOSCAN	Automatic adjustment of suitable lamp frequency in High Speed Mode

LAMP FREQUENCY MODES

50 / 60 Hz	Low Noise
75 Hz	Standard
300 Hz	High Speed - Range between 270 and 360 Hz
1000 Hz	High Speed - Range between 900 and 1200 Hz

ELECTRONIC BALLASTS – MAX RANGE

Blue standard housing with handle; Mains frequency 50/60 Hz; given mains voltages are nominal values



Ident. No.	Description	Wattage	Lamp Frequency	Lamphead Connector	Mains Supply
L2.0014190	EB MAX 1.8	575/800/ 1200/1800 W	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
L2.0016746	EB MAX 2.5/4 NEW	2500/4000 W	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
L2.0016747	EB MAX 6/9 NEW	6000/9000 W	50/60/75/ 300/1000 Hz	International (VEAM)	115/230 V~ Bare Ends
L2.0016748	EB MAX 12/18*	12000/ 18000 W	50/60/75/ 300/1000 Hz	International (VEAM)	230 V~ Bare Ends

ELECTRONIC BALLASTS

ELECTRONIC BALLASTS – HIGH SPEED

Blue standard housing with handle; Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No.	Description	Features	Lamp Frequency	Lamphead Connector	Mains Supply
L2.76013KH	EB 125/200	ALF	1000 Hz	Binder (125 W) Amphenol (200 W)	120/230 V~ Schuko
L2.76260KH	EB 400/575	ALF	1000 Hz	International (VEAM)	120/230 V~ Schuko
L2.76184KH	EB 575/800 HS	ALF, CCL, DMX	50/60/75/1000 Hz	International (VEAM)	120/230 V~ Schuko
L2.0001687	EB 575/800 HS	ALF, CCL, DMX	50/60/75/1000 Hz	International (VEAM)	120/230 V~ Bare Ends

ELECTRONIC BALLASTS – BASIC

Blue standard housing with handle; Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No.	Description	Features	Lamp Frequency	Lamphead Connector	Mains Supply
L2.76425.0	EB 575/1200	ALF	50/60/75 Hz	International (VEAM)	120/230 V~ Schuko
L2.76625.0	EB 1200/1800	ALF	50/60/75 Hz	International (VEAM)	120/230 V~ Schuko
L2.76695.0	EB 2500 Baby	ALF	50/60/75 Hz	International (VEAM)	230 V~ Schuko
L2.76640.0	EB 2.5/4	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
L2.76180.0	EB 6/9	ALF	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends
L2.76290.0	EB 12/18	ALF, with trolley	50/60/75 Hz	International (VEAM)	230 V~ Bare Ends

ELECTRONIC BALLASTS – BATTERY

Silver aluminium profile housing

Ident. No.	Description	Features	Lamp Frequency	Lamphead Connector	Mains Supply
L2.76040.B	EBB 125/200		150 Hz	Binder (125 W) Amphenol (200 W)	20-36 V... XLR 4-Plug
L2.76270.B	EBB 200/400		110 Hz	Amphenol (200 W) International (VEAM) (400 W)	20-36 V... 2 x XLR 4-Plug*

UPGRADE KITS

Extension of the High Speed Frequencies by 300 Hz. Part and installation only via Service Partner (assembly cost not included)

Ident. No.	Description	
L2.0018768	Extension 300 Hz for EB 2.5/4	for L2.76655KH
L2.0018769	Extension 300 Hz for EB 6/9	for L2.76185KH
L2.0018770	Extension 300 Hz for EB 12/18	for L2.76295KH

* Both battery cables have to be connected when operated with 400 W lampheads.

EVENT BALLASTS




ELECTRONIC BALLASTS – EVENT

Silver aluminium 19" housing, 4 units, for rack mount installation
Mains frequency 50/60 Hz; given mains voltages are nominal values

Ident. No.	Description	Features	Lamp Frequency	Lamphead Connector	Mains Supply
L2.76259EV	EB 575 EVENT SINGLE*	ALF	approx. 110 Hz	Schaltbau M1	120/230 V~ Schuko
L2.76610.0	EB 1200/1800 EVENT THREE	ALF, DMX, CCL	approx. 200 Hz	Harting HAN 16	230 V~, 3Ph+N, CEE 16 A
L2.76340.0	EB 575 EVENT SIX	ALF, DMX	approx. 200 Hz	Schaltbau M3	120/230 V~ 3Ph+N, CEE 16 A
L2.76340HC	EB 575 EVENT SIX	ALF, DMX	approx. 200 Hz	Harting HAN 16	120/230 V~ 3Ph+N, CEE 16 A

TUNGSTEN

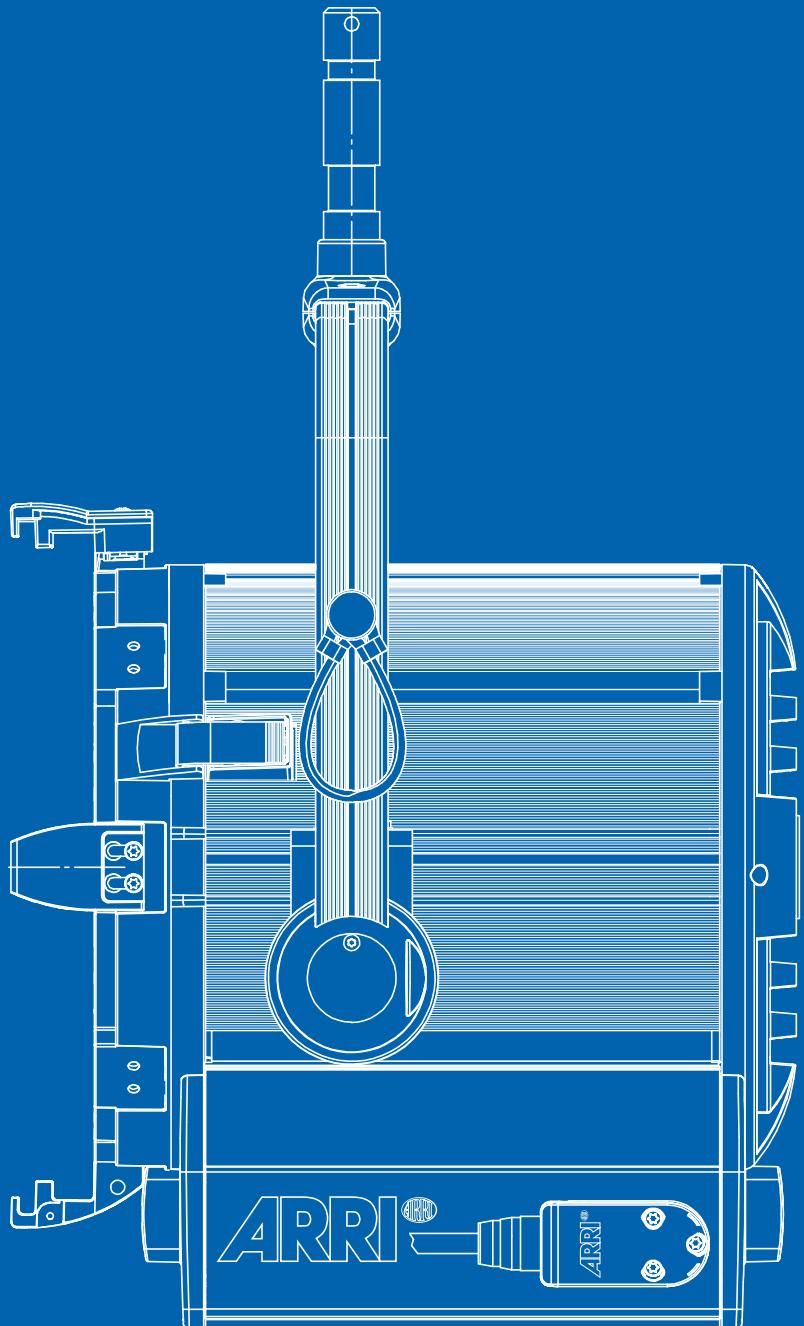

ARRILITE 750 Plus



Type of Lamphead:	Open Face with faceted reflector
Lamp Type:	HPL* 750 W, 575 W, 375 W GKV** 600 W, FKR 650 W
Lamp Base:	G 9,5
UV Protection Glass:	150 mm
Mounting:	Socket 16 mm
Size (HxWxL) /	226 x 230 x 224 mm /
Packed Size:	260 x 230 x 290 mm
Packed Volume:	0.017 m ³
Weight / Packed Weight:	approx. 2 kg / 3 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, ENEC, cNRTLus

TUNGSTEN PORTABLE LIGHTS WITH MAX TECHNOLOGY

(cable length 3 m, with line switch; incl. 4-leaf barndoors and accessory holder)

Ident. No. Description

L3.36700.B	ARRILITE 750 Plus	MAN	blue	100 - 240 V~	Bare Ends
L3.36700.D	ARRILITE 750 Plus	MAN	blue	100 - 240 V~	Schuko

ACCESSORIES FOR ARRILITE 750 PLUS

DIFFUSION:

Ident. No. Description

L2.77180.0	ARRI filter pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)
------------	---

LIGHT CONTROL:

Ident. No. Description

L2.79470.0	4-leaf barndoors (168 mm / 6.6")
L2.79460.0	Set of 4 scrims (168 mm / 6.6")
L2.79460.A	Scrim, full single (168 mm / 6.6")
L2.79460.B	Scrim, full double (168 mm / 6.6")
L2.79460.C	Scrim, half single (168 mm / 6.6")
L2.79460.D	Scrim, half double (168 mm / 6.6")
L2.88912.1	Scrim Bag for 168 mm / 6.6" scrims
L2.36780.0	Accessory Holder for ARRILITE 750 Plus

ACCESSORIES FOR ARRILITE 750 PLUS

SOFTBOXES:

Ident. No.	Description
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)
L2.73408.0	Handgrip, 16 mm spigot size with thread 3/8", light weight

STANDS:

Ident. No.	Description
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA)
L2.8803653	Master Stand (1004BAC)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0,6 m, max. load 5 kg

TRANSPORT:

Ident. No.	Description
L2.36806.R	Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4"), with wheels
L2.36806.0	Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4")
L2.36807.R	Case for 4 lampheads (100 x 40 x 34 cm), with wheels
L2.88020.0	Soft bag for stands, gel rolls or frames

LAMPS:

Ident. No.	Description
L2.36800.0	Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)
L2.36770.0	Lamp cooling adapter for ARRILITE 750 Plus

TUNGSTEN

ARRILITE 2000 Plus



Type of Lamphead:	Open Face with facet reflector
Lamp Type:	FEX 2000 W
Lamp Base:	RX7s
UV Protection Glass:	215 mm
Mounting:	Socket 16 mm
Size (HxWxL) /	317 x 355 x 241 mm /
Packed Size:	375 x 345 x 320 mm
Packed Volume:	0.04 m ³
Weight / Packed Weight:	approx. 3 kg / 6 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, ENEC, cNRTLus

TUNGSTEN PORTABLE LIGHTS WITH MAX TECHNOLOGY

(cable length 3 m, with line switch; incl. 4-leaf barndoors)

Ident. No.	Description	MAN	blue	220 - 240 V~	Bare Ends
L3.36500.B	ARRILITE 2000 Plus	MAN	blue	220 - 240 V~	Bare Ends
L3.36500.D	ARRILITE 2000 Plus	MAN	blue	220 - 240 V~	Schuko

| L3.36500.B | ARRILITE 2000 Plus | MAN | blue | 220 - 240 V~ | Bare Ends |
| L3.36500.D | ARRILITE 2000 Plus | MAN | blue | 220 - 240 V~ | Schuko |

ACCESSORIES FOR ARRI LITE 2000 PLUS

DIFFUSION:

Ident. No.	Description
L2.77180.0	ARRI filter pack (each 2 x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)

LIGHT CONTROL:

Ident. No.	Description
L2.76522.0	4-leaf barndoors (235 mm / 9.3")
L2.76950.0	Set of 4 scrims (254 mm / 10.0")
L2.76950.A	Scrim, full single (254 mm / 10.0")
L2.76950.B	Scrim, full double (254 mm / 10.0")
L2.76950.C	Scrim, half single (254 mm / 10.0")
L2.76950.D	Scrim, half double (254 mm / 10.0")

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.89061.0	Speed Ring circular (9225) (255 mm / 10.0")

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)
L2.73408.0	Handgrip, 16 mm spigot size with thread 3/8", light weight

STANDS:

Ident. No.	Description
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A)
L2.8803653	Master Stand (1004BAC)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description	Price / EURO
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg	20 €

TRANSPORT:

Ident. No.	Description
L2.76956.P	Case for 2 lampheads (70 x 39 x 37 cm / 27.6 x 15.4 x 14.6")

LAMPS:

Ident. No.	Description
L2.89212.0	Lamp 2000 W 230 V RX7s-21 FEX (Osram)

ARRI 150



Type of Lamphead:	Fresnel
Lamp Type:	150 W / 240 V; 150 W / 120 V 100 W / 240 V
Lamp Base:	GX6,35
Lens Diameter:	50 mm
Mounting:	Socket 16 mm
Size (HxWxL) /	163 x 132 x 168 mm /
Packed Size:	145 x 175 x 280 mm
Packed Volume:	0.007 m³
Weight / Packed Weight:	approx. 1 kg / 2 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus

TUNGSTEN FRESNEL LIGHTS

(cable length 3.5 m, with line switch or dimmer; incl. 4-leaf barndoors and filterframe)

Ident. No.	Description
L3.79360.B	ARRI 150 with line switch blue/silver 90 - 250 V~ Bare Ends
L3.79360.D	ARRI 150 with line switch blue/silver 90 - 250 V~ Schuko
L3.79360.E	ARRI 150 with line dimmer blue/silver 90 - 250 V~ Bare Ends
L3.79360.F	ARRI 150 with line dimmer blue/silver 90 - 250 V~ Schuko

ACCESSORIES FOR ARRI 150

LIGHT CONTROL:

Ident. No.	Description
L2.79380.0	4-leaf barndoors (78 mm / 3.1")
L2.73466.0	Set of 4 scrims (78 mm / 3.1")
L2.73466.A	Scrim, full single (78 mm / 3.1")
L2.73466.B	Scrim, full double (78 mm / 3.1")
L2.73466.C	Scrim, half single (78 mm / 3.1")
L2.73466.D	Scrim, half double (78 mm / 3.1")
L2.88908.1	Scrim Bag for 78 mm / 3.1" scrims
L2.79395.0	Filter frame (78 mm / 3.1")
L2.79390.0	Snoot (78 mm / 3.1")

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)

STANDS:

Ident. No.	Description
L2.76975.0	Small ARRI Kit Stand LS.1 (050KA)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0,6 m, max. load 5 kg

LAMPS:

Ident. No.	Description
L2.89202.0	Lamp 150 W 230 V GX6,35 (Osram)

TUNGSTEN

ARRI 300 Plus



Type of Lamphead:	Fresnel
Lamp Type:	CP/81 FSL 300 W / 230 V CP/81 FKW 300 W / 120 V
Lamp Base:	GY 9,5
Lens Diameter:	80 mm
Mounting:	Socket 16 mm
Size (HxWxL) /	233 x 187 x 160 mm /
Packed Size:	275 x 190 x 240 mm
Packed Volume:	0.013 m ³
Weight / Packed Weight:	approx. 2 kg / 3 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus

TUNGSTEN FRESNEL LIGHTS

(cable length 3.5 m, with line switch; incl. 4-leaf barndoors and filterframe)

Ident. No.	Description
L3.79200.B	ARRI 300 Plus
L3.79200.D	ARRI 300 Plus
L3.79205.B	ARRI 300 Plus
L3.79205.D	ARRI 300 Plus

Ident. No.	Description	MAN	blue/silver	90 - 250 V~	Bare Ends
L3.79200.B	ARRI 300 Plus	MAN	blue/silver	90 - 250 V~	Schuko
L3.79205.B	ARRI 300 Plus	MAN	black	90 - 250 V~	Bare Ends
L3.79205.D	ARRI 300 Plus	MAN	black	90 - 250 V~	Schuko

ACCESSORIES FOR ARRI 300 PLUS

LIGHT CONTROL:

Ident. No.	Description
L2.79170.0	4-leaf barndoors (130 mm / 5.1")
L2.79160.0	Set of 4 scrims (130 mm / 5.1")
L2.79160.A	Scrim, full single (130 mm / 5.1")
L2.79160.B	Scrim, full double (130 mm / 5.1")
L2.79160.C	Scrim, half single (130 mm / 5.1")
L2.79160.D	Scrim, half double (130 mm / 5.1")
L2.88911.1	Scrim Bag for 130 mm / 5.1" scrims
L2.79190.0	Filter frame (130 mm / 5.1")
L2.79180.0	Snoot (130 mm / 5.1")

SOFTBOXES:

Ident. No.	Description
L2.76719.0	Chimera Lightbank Video Pro Plus "XS", incl. 3 front screens (8115)
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.89067.0	Speed Ring circular (9640) (130 mm / 5.1")

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)

STANDS:

Ident. No.	Description
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

TUNGSTEN

SAFETY:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0,6 m, max. load 5 kg

TRANSPORT:

Ident. No.	Description
L2.88020.0	Soft bag for stands, gel rolls or frames

LAMPS:

Ident. No.	Description
L2.89203.0	Lamp 300 W 240 V GY9,51 CP81 (Osram)

ARRI 650 Plus



Type of Lamphead:	Fresnel
Lamp Type:	CP/89 FRL 650 W / 230 V CP/89 FRK 650 W / 120 V CP/82 500 W; CP/81 300 W
Lamp Base:	GY 9,5
Lens Diameter:	112 mm
Mounting:	Socket 16 mm
Size (HxWxL) /	276 x 220 x 190 mm /
Packed Size:	295 x 220 x 255 mm
Packed Volume:	0.017 m ³
Weight / Packed Weight:	approx. 3 kg / 4 kg
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, GS, cNRTLus

TUNGSTEN FRESNEL LIGHTS

(cable length 3 m, with line switch (MAN version), 2 m (P.O. version); incl. 4-leaf barndoors and filterframe)

Ident. No.	Description					
L3.79400.B	ARRI 650 Plus	MAN	blue/silver	90 - 250 V~	Bare Ends	
L3.79400.D	ARRI 650 Plus	MAN	blue/silver	90 - 250 V~	Schuko	
L3.79400.I	ARRI 650 Plus	P.O.	blue/silver	90 - 250 V~	Bare Ends	
L3.79400.K	ARRI 650 Plus	P.O.	blue/silver	90 - 250 V~	Schuko	
L3.79405.B	ARRI 650 Plus	MAN	black	90 - 250 V~	Bare Ends	
L3.79405.D	ARRI 650 Plus	MAN	black	90 - 250 V~	Schuko	
L3.79405.K	ARRI 650 Plus	P.O.	black	90 - 250 V~	Schuko	

ACCESSORIES FOR ARRI 650 PLUS

LIGHT CONTROL:

Ident. No.	Description
L2.79470.0	4-leaf barndoors (168 mm / 6.6")
L2.79471.0	4-leaf barndoors, black/silver (168 mm / 6.6")
L2.79500.0	8-leaf barndoors (168 mm / 6.6")
L2.79490.0	Filter frame (168 mm / 6.6")
L2.79460.0	Set of 4 scrims (168 mm / 6.6")
L2.79460.A	Scrim, full single (168 mm / 6.6")
L2.79460.B	Scrim, full double (168 mm / 6.6")
L2.79460.C	Scrim, half single (168 mm / 6.6")
L2.79460.D	Scrim, half double (168 mm / 6.6")
L2.88912.1	Scrim Bag for 168 mm / 6.6" scrims
L2.79480.0	Snoot (168 mm / 6.6")

SOFTBOXES:

Ident. No.	Description
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.89068.0	Speed Ring circular (9670) (168 mm / 6.6")
L2.89074.0	Speed Ring circular metal (9670AL) (168 mm / 6.6")
L2.89069.0	Speed Ring circular (9672) (168 mm / 6.6")

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)

STANDS:

Ident. No.	Description
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

TUNGSTEN

SAFETY:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0,6 m, max. load 5 kg

TRANSPORT:

Ident. No.	Description
L2.88020.0	Soft bag for stands, gel rolls or frames

LAMPS:

Ident. No.	Description
L2.89205.0	Lamp 650 W 230 V GY9,5 FRL CP89 (Osram)

TRUE BLUE T1



Type of Lamphead:	Fresnel
Lamp Type:	CP/40 FKJ 1000 W, 230 V CP/71 FKJ 1000 W, 230 V
Lamp Base:	G22
Lens Diameter:	150 mm
Mounting:	Spigot 28 mm (short), 16 mm Socket
Size (HxWxL) / Packed Size:	357 x 323 x 216 mm / 330 x 395 x 390 mm
Packed Volume:	0.05 m ³
Weight / Packed Weight:	approx. 6 kg / 7 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 3 m, with line switch (MAN version), 1.5 m (P.O. version); incl. 4-leaf barndoors and filterframe)

Ident. No.	Description				
L3.39610.B	True Blue T1	MAN	blue/silver	220 - 250 V~	Bare Ends
L3.39610.D	True Blue T1	MAN	blue/silver	220 - 250 V~	Schuko
L3.39610.I	True Blue T1	P.O.	blue/silver	220 - 250 V~	Bare Ends
L3.39615.B	True Blue T1	MAN	black	220 - 250 V~	Bare Ends
L3.39615.D	True Blue T1	MAN	black	220 - 250 V~	Schuko
L3.39615.I	True Blue T1	P.O.	black	220 - 250 V~	Bare Ends

ACCESSORIES FOR TRUE BLUE T1

LIGHT CONTROL:

Ident. No.	Description
L2.39670.0	4-leaf barndoors, True Blue (197 mm / 7.8")
L2.39700.0	8-leaf barndoors, True Blue (197 mm / 7.8")
L2.79660.0	Set of 4 scrims (197 mm / 7.8")
L2.79660.A	Scrim, full single (197 mm / 7.8")
L2.79660.B	Scrim, full double (197 mm / 7.8")
L2.79660.C	Scrim, half single (197 mm / 7.8")
L2.79660.D	Scrim, half double (197 mm / 7.8")
L2.79690.0	Filter frame (197 mm / 7.8")
L2.79680.0	Snoot (197 mm / 7.8") with variable aperture

ACCESSORIES FOR TRUE BLUE T1

SOFTBOXES:

Ident. No.	Description
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125)
L2.89053.0	Chimera Lightbank Daylite Junior Plus "S", incl. 3 front screens (8225)
L2.76246.0	Speed Ring circular (9190) (197 mm / 7.8")
L2.89060.0	Speed Ring circular (9192) (197 mm / 7.8")

MOUNTING:

Ident. No.	Description
L2.8803652	ARRI Super Clamp (035)
L2.40701.3	Spigot 28 mm, long, with flange & allen screw, fits profile stirrups without sleeve cuff

STANDS:

Ident. No.	Description
L2.8803653	Master Stand (1004BAC)
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

TRANSPORT:

Ident. No.	Description
L2.76956.P	Case for 2 lampheads (70 x 39 x 37 cm / 27.6 x 15.4 x 14.6")

LAMPS:

Ident. No.	Description
L2.89208.0	Lamp 1000 W 230 V G22 FKJ CP71 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.39712.0	Conversion Kit from True Blue T1 MAN to P.O. version: stirrup for pole operated pan, tilt and focus
L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)

TRUE BLUE T2



Type of Lamphead:	Fresnel
Lamp Type:	CP/41 FKK 2000 W / 230 V CP/73 FKK 2000 W / 230 V
Lamp Base:	G38
Lens Diameter:	175 mm
Mounting:	Spigot 28 mm
Size (HxWxL) / Packed Size:	398 x 375 x 315 mm / 395 x 405 x 470 mm
Packed Volume:	0.08 m ³
Weight / Packed Weight:	approx. 7 kg / 10 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 3 m, with line switch (MAN version), 1.5 m (P.O. version); incl. 4-leaf barndoors and filterframe)

Ident. No.	Description
L3.41250.B	True Blue T2 MAN blue/silver 220 - 250 V~ Bare Ends
L3.41250.D	True Blue T2 MAN blue/silver 220 - 250 V~ Schuko
L3.41250.I	True Blue T2 P.O. blue/silver 220 - 250 V~ Bare Ends
L3.41255.B	True Blue T2 MAN black 220 - 250 V~ Bare Ends
L3.41255.D	True Blue T2 MAN black 220 - 250 V~ Schuko
L3.41255.I	True Blue T2 P.O. black 220 - 250 V~ Bare Ends

ACCESSORIES FOR TRUE BLUE T2

LIGHT CONTROL:

Ident. No.	Description
L2.39870.0	4-leaf barndoors, True Blue (245 mm / 9.7")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.79860.0	Set of 4 scrims (230 mm / 9.1")
L2.79860.A	Scrim, full single (230 mm / 9.1")
L2.79860.B	Scrim, full double (230 mm / 9.1")
L2.79860.C	Scrim, half single (230 mm / 9.1")
L2.79860.D	Scrim, half double (230 mm / 9.1")
L2.79890.0	Filter frame (230 mm / 9.1")
L2.79880.0	Snoot (245 mm / 9.7") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.76248.0	Speed Ring circular (9205) (245 mm / 9.7")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

STANDS:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.89213.0	Lamp 2000 W 230 V G38 FKK CP73 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)

TRUE BLUE T5



Type of Lamphead:	Fresnel
Lamp Type:	CP/29 5000 W / 230 V CP/85 5000 W / 230 V
Lamp Base:	G38
Lens Diameter:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	522 x 465 x 390 mm /
Packed Size:	495 x 510 x 555 mm
Packed Volume:	0.14 m ³
Weight / Packed Weight:	approx. 12 kg / 17 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 3 m, with line switch; incl. 4-leaf barndoors and filterframe)

Ident. No.	Description
L3.40000.B	True Blue T5
L3.40005.B	True Blue T5

L3.40000.B	True Blue T5	MAN	blue/silver	220 - 250 V~	Bare Ends
L3.40005.B	True Blue T5	MAN	black	220 - 250 V~	Bare Ends

ACCESSORIES FOR TRUE BLUE T5

LIGHT CONTROL:

Ident. No.	Description
L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.80980.0	Set of 4 scrims (330 mm / 13.0")
L2.80980.A	Scrim, full single (330 mm / 13.0")
L2.80980.B	Scrim, full double (330 mm / 13.0")
L2.80980.C	Scrim, half single (330 mm / 13.0")
L2.80980.D	Scrim, half double (330 mm / 13.0")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.89058.0	Chimera Lightbank Daylite Plus "M", incl. 3 front screens (8635)
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

STANDS:

Ident. No.	Description
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.89214.0	Lamp 5000 W 230 V G38 CP85 (Osram)

TRUE BLUE ST1



Type of Lamphead:	Fresnel
Lamp Type:	CP/40 FKJ 1000 W / 230 V CP/71 FKJ 1000 W / 230 V
Lamp Base:	G22
Lens Diameter:	175 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	398 x 362 x 325 mm /
Packed Size:	395 x 405 x 475 mm
Packed Volume:	0.08 m³
Weight / Packed Weight:	approx. 7 kg / 9 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 1.5 m*; incl. 4-leaf barndoors and filterframe)

Ident. No. Description

L3.40500.B	True Blue ST1	MAN	blue/silver	100 - 240 V~	Bare Ends
L3.40500.D	True Blue ST1	MAN	blue/silver	100 - 240 V~	Schuko
L3.40500.I	True Blue ST1	P.O.	blue/silver	100 - 240 V~	Bare Ends
L3.40500.K	True Blue ST1	P.O.	blue/silver	100 - 240 V~	Schuko
L3.40500LB	True Blue ST1	MAN Location*	blue/silver	100 - 240 V~	Bare Ends
L3.40505.B	True Blue ST1	MAN	black	100 - 240 V~	Bare Ends
L3.40505.D	True Blue ST1	MAN	black	100 - 240 V~	Schuko
L3.40505.I	True Blue ST1	P.O.	black	100 - 240 V~	Bare Ends
L3.40505.K	True Blue ST1	P.O.	black	100 - 240 V~	Schuko
L3.40505.L	True Blue ST1/2	P.O.	black	220 - 240 V~	Bare Ends

ACCESSORIES FOR TRUE BLUE ST1

LIGHT CONTROL:

Ident. No.	Description
L2.39870.0	4-leaf barndoors, True Blue (245 mm / 9.7")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.79860.0	Set of 4 scrims (230 mm / 9.1")
L2.79860.A	Scrim, full single (230 mm / 9.1")
L2.79860.B	Scrim, full double (230 mm / 9.1")
L2.79860.C	Scrim, half single (230 mm / 9.1")
L2.79860.D	Scrim, half double (230 mm / 9.1")
L2.79890.0	Filter frame (230 mm / 9.1")
L2.79880.0	Snoot (245 mm / 9.7") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.76248.0	Speed Ring circular (9205) (245 mm / 9.7")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

STANDS:

Ident. No.	Description
L2.8803224	Combo Steel Stand (A1035CS)
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)
L2.76980.0	Wheel set with brakes, Ø 125 mm / 25 x 25 mm square mount (90000A)

SAFETY:

Ident. No.	Description
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg

LAMPS:

Ident. No.	Description
L2.89208.0	Lamp 1000 W 230 V G22 FKJ CP71 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)

TRUE BLUE ST2/3



Type of Lamphead:	Fresnel
Lamp Type:	CP/41 FKK 2000 W / 230 V CP/73 FKK 2000 W / 230 V HX48 3000 W / 230 - 240 V
Lamp Base:	G38
Lens Diameter:	250 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	522 x 448 x 380 mm /
Packed Size:	495 x 515 x 550 mm
Packed Volume:	0.14 m ³
Weight / Packed Weight:	approx. 12 kg / 15 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 1.5 m*; incl. 4-leaf barndoors and filterframe)

Ident. No. Description

L3.40750.B	True Blue ST2/3	MAN	blue/silver	220 - 250 V~	Bare Ends
L3.40750.D	True Blue ST2/3	MAN	blue/silver	220 - 250 V~	Schuko
L3.40750.I	True Blue ST2/3	P.O.	blue/silver	220 - 250 V~	Bare Ends
L3.40750.K	True Blue ST2/3	P.O.	blue/silver	220 - 250 V~	Schuko
L3.40750LB	True Blue ST2/3	MAN Location*	blue/silver	220 - 250 V~	Bare Ends
L3.40755.B	True Blue ST2/3	MAN	black	220 - 250 V~	Bare Ends
L3.40755.D	True Blue ST2/3	MAN	black	220 - 250 V~	Schuko
L3.40755.I	True Blue ST2/3	P.O.	black	220 - 250 V~	Bare Ends
L3.40755.K	True Blue ST2/3	P.O.	black	220 - 250 V~	Schuko

ACCESSORIES FOR TRUE BLUE ST2/3

LIGHT CONTROL:

Ident. No.	Description
L2.40950.0	4-leaf barndoors, True Blue (344 mm / 13.5")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.80980.0	Set of 4 scrims (330 mm / 13.0")
L2.80980.A	Scrim, full single (330 mm / 13.0")
L2.80980.B	Scrim, full double (330 mm / 13.0")
L2.80980.C	Scrim, half single (330 mm / 13.0")
L2.80980.D	Scrim, half double (330 mm / 13.0")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425)
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

STANDS:

Ident. No.	Description
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A)
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.89213.0	Lamp 2000 W 230 V G38 FKK CP73 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)

TRUE BLUE ST5



Type of Lamphead:	Fresnel
Lamp Type:	CP/85 5000 W / 230 V CP/29 5000 W / 230 V
Lamp Base:	G38
Lens Diameter:	300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	595 x 518 x 393 mm /
Packed Size:	575 x 605 x 605 mm
Packed Volume:	0.21 m ³
Weight / Packed Weight:	approx. 15 kg / 20 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS

(cable length 1.5 m*; incl. 4-leaf barndoors and filterframe)

Ident. No. Description

L3.41000.B	True Blue ST5	MAN	blue/silver	220 - 250 V~	Bare Ends
L3.41000.I	True Blue ST5	P.O.	blue/silver	220 - 250 V~	Bare Ends
L3.41000LB	True Blue ST5	MAN Location*	blue/silver	220 - 250 V~	Bare Ends
L3.41005.B	True Blue ST5	MAN	black	220 - 250 V~	Bare Ends
L3.41005.I	True Blue ST5	P.O.	black	220 - 250 V~	Bare Ends

ACCESSORIES FOR TRUE BLUE ST5

LIGHT CONTROL:

Ident. No.	Description
L2.41200.0	4-leaf barndoors, True Blue (413 mm / 16.3")
L2.81210.0	8-leaf barndoors (413 mm / 16.3")
L2.81230.0	Set of 4 scrims (400 mm / 15.8")
L2.81230.A	Scrim, full single (400 mm / 15.8")
L2.81230.B	Scrim, full double (400 mm / 15.8")
L2.81230.C	Scrim, half single (400 mm / 15.8")
L2.81230.D	Scrim, half double (400 mm / 15.8")
L2.81220.0	Filter frame (400 mm / 15.8")
L2.81225.0	Snoot (413 mm / 16.3") with variable aperture

SOFTBOXES:

Ident. No.	Description
L2.89058.0	Chimera Lightbank Daylite Plus "M", incl. 3 front screens (8635)
L2.89059.0	Chimera Lightbank Daylite Plus "L", incl. 3 front screens (8645)
L2.89062.0	Speed Ring circular (9365) (411 mm / 16.2")

MOUNTING:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)

STANDS:

Ident. No.	Description
L2.8803225	Combo Alu Stand (A1035B)
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA)
L2.76959.0	Wheel set with brakes, Ø 75 mm / M10 mount with brakes (104)
L2.88096.0	Wheel set with brakes, Ø 160 mm / M10 mount with brakes (374)

TUNGSTEN

SAFETY:

Ident. No.	Description
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg

LAMPS:

Ident. No.	Description
L2.89214.0	Lamp 5000 W 230 V G38 CP85 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.34065.0	Conversion Kit from True Blue ST5 to Theater version: Theater cassette with barndoors insert



STUDIO T12

Type of Lamphead:	Fresnel
Lamp Type:	12000 W / 230 V monoplane CP/83 10000 W / 230 V monoplane
Lamp Base:	G38
Lens Diameter:	420 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	748 x 682 x 562 mm /
Packed Size:	695 x 725 x 780 mm
Packed Volume:	0.39 m ³
Weight / Packed Weight:	approx. 25 kg / 46 kg (with palette)
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, ENEC, cNRTLus

TUNGSTEN FRESNEL LIGHTS

(cable length 4 m, incl. 4-leaf barndoors)

Ident. No.	Description
------------	-------------

L0.82120.B	STUDIO T 12	MAN	blue/silver	220 - 250 V~	Bare Ends
------------	-------------	-----	-------------	--------------	-----------

ACCESSORIES FOR STUDIO T12

LIGHT CONTROL:

Ident. No.	Description
L2.82150.0	4-leaf barndoors (510 mm / 20.1")
L2.82160.0	Set of 4 scrims (495 mm / 19.5")
L2.82160.A	Scrim, full single (495 mm / 19.5")
L2.82160.B	Scrim, full double (495 mm / 19.5")
L2.82160.C	Scrim, half single (495 mm / 19.5")
L2.82160.D	Scrim, half double (495 mm / 19.5")
L2.82155.0	Filter frame (495 mm / 19.5")

SOFTBOXES:

Ident. No.	Description
L2.89059.0	Chimera Lightbank Daylite Plus "L", incl. 3 front screens (8645)
L2.89063.0	Speed Ring circular (9435) (508 mm / 20.0")

MOUNTNG:

Ident. No.	Description
L2.76989.0	ARRI Swiveling C Clamp (C150)
L2.0000885	T12 Top latch for heavy accessories

STANDS:

Ident. No.	Description
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA)
L2.76959.0	Wheel set with brakes, Ø 75 mm / M10 mount with brakes (104)
L2.88096.0	Wheel set with brakes, Ø 160 mm / M10 mount with brakes (374)

SAFETY:

Ident. No.	Description
L2.80866.0	Safety cable (6 mm) 1 m, max. load 36 kg

STUDIO T24



Type of Lamphead:	Fresnel
Lamp Type:	24000 W / 240 V monoplane 20000 W / 230 V CP/99 monoplane
Lamp Base:	G38
Lens Diameter:	625 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	1068 x 1040 x 830 mm
Packed Size:	1135 x 1050 x 1170 mm
Packed Volume:	1.39 m ³
Weight / Packed Weight:	approx. 61 kg / 114 kg (with pallet)
Protection Class / IP Rating:	I / IP20
Certifications:	CE, CB, ENEC, cNRTLus

TUNGSTEN FRESNEL LIGHTS

(cable length 1 m, without barndoors)

Ident. No.	Description	MAN	blue/silver	220 - 250 V~	International (VEAM)
L1.82270.B	STUDIO T 24	MAN	blue/silver	220 - 250 V~	International (VEAM)
L0.82270.D	STUDIO T 24 Set*	MAN	blue/silver	220 - 250 V~	International (VEAM)

ACCESSORIES FOR STUDIO T24

LIGHT CONTROL:

Ident. No.	Description
L2.71100.0	4-leaf barndoors (740 mm / 29.1")
L2.71115.0	Set of 4 scrims (740 mm / 29.1")
L2.71115.A	Scrim, full single (740 mm / 29.1")
L2.71115.B	Scrim, full double (740 mm / 29.1")
L2.71115.C	Scrim, half single (740 mm / 29.1")
L2.71115.D	Scrim, half double (740 mm / 29.1")
L2.71110.0	Filter frame (740 mm / 29.1")

SOFTBOXES:

Ident. No.	Description
L2.89064.0	Speed Ring circular (9464) (735 mm / 29.0")

CABLES:

Ident. No.	Description
L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m, International connector (VEAM)
L2.82294.A	Head-to-Ballast/Dimmer cable 12/18/24 kW, 20 m, International connector (VEAM)
L2.82297.0	Mains cable 125 A / 230 V, 7 m, International connector (Cannon / CEE blue)

SAFETY:

Ident. No.	Description
L2.0015517	Safety cable (10 mm) 1 m, max. load 100 kg

LAMPS:

Ident. No.	Description
L2.89218.0	Lamp 20000 W 230 V G38 CP99 (Osram)

MISCELLANEOUS:

Ident. No.	Description
L2.83396.0	Retrofit lampcarriage with fan for STUDIO T 24 (200 V~ version)
L2.82296.0	Dimmer ADM 24, 24 kW / 230 V, with lamp hour counter, XLR-5 pin connector for remote control, pre-heat function, international connector, blue standard housing with handle



TRUE BLUE ST1/2 THEATER

Type of Lamphead:	Fresnel
Lamp Type:	CP/40 1000 W / 230 V Monoplane CP/71 1000 W / 230 V Biplane CP/41 2000 W / 230 V Monoplane CP/73 2000 W / 230 V Biplane
Lamp Base:	G38/G22
Lens Diameter:	175 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	398 x 374 x 309 mm /
Packed Size:	460 x 400 x 520 mm
Packed Volume:	0.10 m ³
Weight / Packed Weight:	approx. 8 kg / 11 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS

TRUE BLUE TUNGSTEN FRESNEL LIGHTS FOR THEATER

(cable length 1.5 m; incl. spill light frame and Theater cassette, without barndoors)

Ident. No. Description

L1.40515.B	True Blue ST1/2 Theater	MAN	black	220 - 250 V~	Bare Ends
L1.40525.B	True Blue ST1/2 Theater	MOT*	black	220 - 250 V~	Bare Ends

ACCESSORIES FOR TRUE BLUE ST1/2 THEATER

LIGHT CONTROL:

Ident. No. Description

L2.39870.0	4-leaf barndoors, True Blue (245 mm / 9.7")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.33817.0	Filter frame for theater cassette (245 mm / 9.7")

SAFETY:

Ident. No. Description

L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg
------------	--

LAMPS:

Ident. No. Description

L2.89208.0	Lamp 1000 W 230 V G22 FKJ CP71 (Osram)
------------	--

MISCELLANEOUS:

Ident. No. Description

L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)



TRUE BLUE ST5 THEATER

Type of Lamphead:	Fresnel
Lamp Type:	CP/85 5000 W / 230 V CP/29 5000 W / 230 V
Lamp Base:	G38
Lens Diameter:	300 mm
Mounting:	Spigot 28 mm
Size (HxWxL) /	705 x 534 x 427 mm /
Packed Size:	600 x 600 x 750 mm
Packed Volume:	0.27 m ³
Weight / Packed Weight:	approx. 22 kg / 25 kg
Protection Class / IP Rating:	I / IP23
Certifications:	CE, CB, GS, cNRTLus

TRUE BLUE TUNGSTEN FRESNEL LIGHTS FOR THEATER

(cable length 1.5 m (MAN) and 3 m (MOT); incl. spill light frame and Theater cassette, without barndoors)

Ident. No.	Description					
L1.41015.B	True Blue ST5 Theater	MAN	black	220 - 250 V~	Bare Ends	
L1.41025.B	True Blue ST5 Theater	MOT	black	220 - 250 V~	Bare Ends	

ACCESSORIES FOR TRUE BLUE ST5 THEATER

LIGHT CONTROL:

Ident. No.	Description
L2.34067.0	Spill Light frame (413 mm / 16.3")

SAFETY:


Ident. No.	Description
L2.80866.0	Safety cable (6 mm) 1 m, max. load 36 kg

LAMPS:

Ident. No.	Description
L2.89214.0	Lamp 5000 W 230 V G38 CP85 (Osram)

This page is intentionally left blank.

PROFESSIONAL LIGHTING ACCESSORIES - PLA

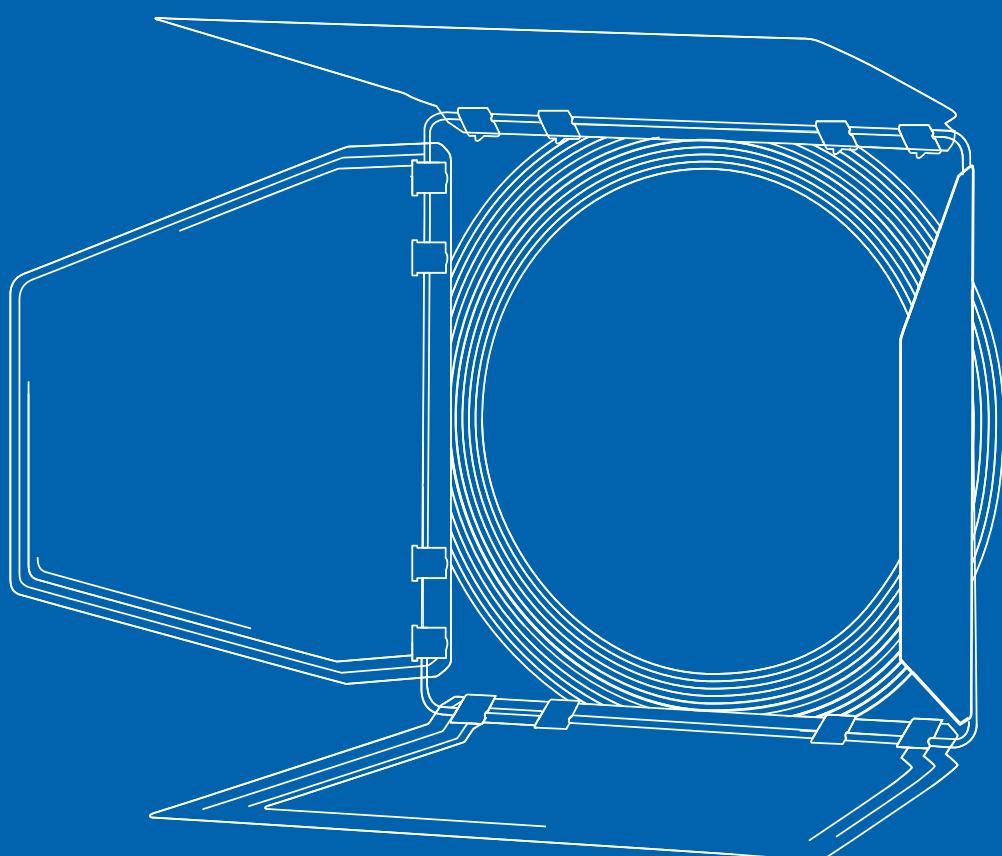

CASES (EMPTY)



SKYPANEL CASES:

Ident. No.	Description
L2.0010639	Case for SkyPanel S30 - Molded Single (88 x 16 x 59 cm / 34,6 x 6,3 x 23,2")
L2.0010640	Case for SkyPanel S30 - Molded Double (86 x 45 x 57 cm / 33,9 x 17,7 x 22,4")
L2.0015848	Case for SkyPanel S60 - Molded Single V2 (87,9 x 24,4 x 76,2 cm / 34,6 x 9,6 x 30,0")
L2.0013694	Case for SkyPanel S120-C - Molded, Center Mount (146 x 53 x 29 cm / 57,3 x 20,7 x 11,2")
L2.0013695	Case for SkyPanel S120-C - Molded, Manual (157 x 60 x 26 cm / 61,6 x 23,7 x 10,1")
L2.0016354	Transportation Case for SkyPanel S360-C

CASTER CASES:

Ident. No.	Description
L2.30099.0	Light case for 1 x Caster & accessories, empty (45 x 34 x 7,8 cm / 17.7 x 13.4 x 3.0")

ACCESSORY BAGS:

Ident. No.	Description
L2.88020.0	Soft bag for stands, gel rolls or frames
L2.0008309	Panel Carrying Bag for SkyPanel S30 (for max. 4 panels or honeycombs)
L2.0008306	Panel Carrying Bag for SkyPanel S60 (for max. 4 panels or honeycombs)
L2.0013780	Panel Carrying Bag for SkyPanel S120-C (for max. 4 panels or honeycombs)

CASES

TRANSPORT CASES:

Ident. No.	Description
L2.0005222	Heavy Duty Case L5/Caster Kit (105 x 53 x 37 cm / 41.3 x 20.9 x 14.6")
L2.76956.P	Case for 2 lampheads (70 x 39 x 37 cm / 27.6 x 15.4 x 14.6")
L2.36806.R	Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4"), with wheels, empty
L2.36806.0	Case for 3 lampheads (81 x 36 x 34 cm / 31.9 x 14.2 x 13.4")
L2.36807.R	Case for 4 lampheads (100 x 40 x 34 cm / 39.4 x 15.8 x 13.4"), with wheels, empty

ARRILUX, POCKETPAR AND POCKETLITE CASES:

Ident. No.	Description
L2.73388.A	Case for ARRILUX 125 Sets, empty (55 x 38 x 30 cm / 21.7 x 15.0 x 11.8")
L2.70839.0	Case for ARRILUX 200 Sets, empty (58 x 28 x 39 cm / 22.8 x 11.0 x 15.4")
L2.88019.0	Basic Kit Case for PocketLITE 200/400 (L9.LITECASE) (50 x 33 x 43 cm / 19.7 x 13.0 x 16.9")
L2.70903.0	Case for ARRILUX 400 Kit, empty (71 x 41 x 32 cm / 27.8 x 16.1 x 12.6")
L2.70902.0	Profi case for ARRILUX 400 Kit (with lighthouse compartment) (80 x 42 x 32 cm / 31,5 x 16,5 x 12,6")
L2.88000.0	Deluxe Pocket Par Kit Case

COMPACT CASES:

Ident. No.	Description
L2.73365.0	Case for 1 x Compact 200, ballast & accessories (43 x 29 x 34 cm / 16.9 x 11.4 x 13.4")

ARRISUN CASES:

Ident. No.	Description
L2.77065.0	Case for 1 x ARRISUN 2, ballast, lenses & accessories (47 x 34 x 35 cm / 18.5 x 13.4 x 13.8")
L2.77853.0	Case for 1 x ARRISUN 5, ballast, lenses & accessoreis (45 x 32 x 47 cm / 17.7 x 12.6 x 18.5")

SOFT CASES:

Ident. No.	Description
L2.88020.0	Soft bag for stands or f-rolls for 6' b-frames & 51" gel roll

EVENT ACCESSORIES & ADAPTERS



EVENT COMPONENTS:

Ident. No.	Description
L2.75600.F	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, Schaltbau M1, 6 pole + PE / Extension cable EVENT 1200/1800 W
L2.75600.E	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, Schaltbau M1, 6 pole + PE / Extension cable EVENT 1200/1800 W
L2.76318.B	Extension cable EVENT 200/575/1200 W, 5 m, Schaltbau (M1, 4 pole + PE)
L2.76318.C	Extension cable EVENT 200/575/1200 W, 10 m, Schaltbau (M1, 4 pole + PE)
L2.37705.0	Split Box EVENT 1800, 3 x 1200/1800 W, Harting (HAN 16, 16 pole + PE)
L2.76341.0	Split Box EVENT SIX, 6 x 575 W (6 x 200 W, 3 x 1200 W), Schaltbau (M3, 12 pole + PE)
L2.76785.0	Transmitter pendant module 200
L2.76786.0	Transmitter pendant module 575
L2.76787.0	Transmitter pendant module 1200

CABLES



HEAD-TO-BALLAST CABLES:

Ident. No.	Description
L2.73382.0	Head-to-Ballast cable 125 W, 7 m, Binder
L2.73372.0	Head-to-Ballast cable 200 W, 7 m, Amphenol
L2.70857.0	Head-to-Ballast cable 400 W, 7 m, International connector (VEAM)
L2.75600.0	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, International connector (VEAM)
L2.75600.F	Head-to-Ballast cable 575/800/1200/1800 W, 7 m, Schaltbau M1, 6 pole + PE / Extension cable EVENT 1200/1800 W
L2.75600.C	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, International connector (VEAM)
L2.75600.E	Head-to-Ballast cable 575/800/1200/1800 W, 15 m, Schaltbau M1, 6 pole + PE / Extension cable EVENT 1200/1800 W
L2.75620.0	Head-to-Ballast cable 2500/4000 W, 7 m, International connector (VEAM)
L2.75620.F	Head-to-Ballast cable 2500/4000 W, 7 m, Schaltbau M3, 6 pol. + PE
L2.75620.C	Head-to-Ballast cable 2500/4000 W, 15 m, International connector (VEAM)
L2.75620.E	Head-to-Ballast cable 2500/4000 W, 15 m, Schaltbau M3, 6 pol. + PE
L2.77940.0	Head-to-Ballast cable 6000/9000 W, 7 m, International connector (VEAM)
L2.77940.A	Head-to-Ballast cable 6000/9000 W, 15 m, International connector (VEAM)
L2.82294.0	Head-to-Ballast/Dimmer cable 12/18/24 kW, 15 m, International connector (VEAM)
L2.82294.A	Head-to-Ballast/Dimmer cable 12/18/24 kW, 20 m, International connector (VEAM)

ADAPTER CABLES:

Ident. No.	Description
L2.72082.0	Adapter for lampheads 1200 W with male Schaltbau-connector (German TV) to Ballast with female Cannon-VEAM-Connector
L2.77440.0	Adapter for use of switchable 2500/4000 W-lamphead with male Cannon-VEAM-Connector on CB 2500 with female Cannon-VEAM-Connector (Switchable lampheads like ARRISUN or X 40/25 are connected internal as 4000 W lamp)
L2.72525.0	Adapter for 4000 W-lamphead with male Schaltbau-connector (German TV) on Ballast with female Cannon-VEAM-Connector

CABLES

MAINS- & EXTENSION CABLES:

Ident. No.	Description
L2.0001485	Mains cable, 1.5 m, w TRUE1 / Bare Ends
L2.0001487	Mains cable, 7 m, powerCON TRUE1 / Edison, with line switch
L2.0001486	Mains cable, 3 m, powerCON TRUE1 / Schuko, with line switch
L2.0008904	Mains cable, 3 m, powerCON TRUE1 / Japanese, with line switch
L2.0003678	Mains cable, 3 m, powerCON TRUE1 / Chinese, with line switch
L2.0005974	Mains cable, 3 m, powerCON TRUE1 / Bare Ends
L2.0007516	Mains cable, 3 m, powerCON TRUE1 / Schuko
L2.0007515	Mains cable, 3 m, powerCON TRUE1 / Edison
L2.0007514	Mains cable, 3 m, powerCON TRUE1 / Chinese
L2.0010231	Mains cable, 3 m, powerCON TRUE1 / Japanese
L2.0015784	Mains cable S360-C, 3 m, powerCON 32A / Schuko
L2.0015785	Mains cable S360-C, 3 m, powerCON 32A / Edison
L2.0015786	Mains cable S360-C, 3 m, powerCON 32A / Chinese
L2.0015787	Mains cable S360-C, 3 m, powerCON 32A / Japanese
L2.0015788	Mains cable S360-C, 3 m, powerCON 32A / Bare Ends
L2.82297.0	Mains cable 125 A / 230 V, 7 m, International connector (Cannon / CEE blue)
L2.84080.0	Extension cable 16 A / 230 V, 2 m, powerCON blue
L2.84080.B	Extension cable 16 A / 230 V, 5 m, powerCON blue

POWER CABLES:

Ident. No.	Description
L2.0007492	DC cable 0.5 m (XLR3) SkyPanel
L2.0007491	DC cable 1 m (XLR3) SkyPanel
L2.0007493	DC cable 3 m (XLR3) SkyPanel
L2.0007494	DC cable 10 m (XLR3) SkyPanel
L2.0007860	DC cable 15 m (XLR3) SkyPanel
L2.0016030	DC cable 5 m (4-Pin 30A) SkyPanel S360-C
L2.0016031	DC cable 10 m (4-Pin 30A) SkyPanel S360-C
L2.30081.0	Power-DMX cable (4-pin XLR), 3 m
L2.30071.0	Power-DMX cable (4-pin XLR), 5 m
L2.0010633	Daisy Chain Cable, 3 m powerCON TRUE1 / CE
L2.0012548	Daisy Chain Cable, 3 m powerCON TRUE1 / UL
L2.0012663	Daisy Chain Cable, 3 m powerCON TRUE1 / Japanese

CABLES

DMX CABLES:

Ident. No.	Description
L2.0007986	DMX data cable, 2 m (XLR 5)
L2.0008369	DMX data cable, 6 m (XLR 5)
L2.0008370	DMX data cable, 15 m (XLR 5)
L2.0013222	DMX data cable, 45 m (XLR 5)
L2.0013221	DMX data cable, 60 m (XLR 5)

BATTERY CABLES:

Ident. No.	Description
L2.30105.0	Battery cable (4-pin XLR), 3 m (with blue marking on cable)

BARndoors



2-LEAF BARndoors:

Ident. No.	Description
------------	-------------

L2.30061.0	2-leaf barndoor for Caster
------------	----------------------------

4-LEAF BARndoors:

Ident. No.	Description
------------	-------------

L2.0008187	4-leaf barndoor for SkyPanel S30
L2.0007530	4-leaf barndoor for SkyPanel S60
L2.0010114	4-leaf barndoor for SkyPanel S120-C
L2.73380.0	4-leaf barndoor, ARRILUX 125 (78 mm / 3.1")
L2.79380.0	4-leaf barndoor (78 mm / 3.1")
L2.79170.0	4-leaf barndoor (130 mm / 5.1")
L2.79470.0	4-leaf barndoor (168 mm / 6.6")
L2.79471.0	4-leaf barndoor, black/silver (168 mm / 6.6")
L2.39670.0	4-leaf barndoor, True Blue (197 mm / 7.8")
L2.79670.0	4-leaf barndoor (197 mm / 7.8")
L2.79671.0	4-leaf barndoor, black/silver (197 mm / 7.8")
L2.76522.0	4-leaf barndoor (235 mm / 9.3")
L2.39870.0	4-leaf barndoor, True Blue (245 mm / 9.7")
L2.40950.0	4-leaf barndoor, True Blue (344 mm / 13.5")
L2.80950.0	4-leaf barndoor (344 mm / 13.5")
L2.80951.0	4-leaf barndoor, black/silver (344 mm / 13.5")
L2.41200.0	4-leaf barndoor, True Blue (413 mm / 16.3")
L2.82150.0	4-leaf barndoor (510 mm / 20.1")

BARndoors

4-LEAF BARndoors:

Ident. No.	Description
L2.82240.0	4-leaf barndoors, square (247 mm / 9.7") - for ARRI X5
L2.82775.0	4-leaf barndoors, square (342 mm / 13.5") - for ARRI X12 from SN 251
L2.82425.0	4-leaf barndoors, square (426 mm / 16.8") - for ARRI X 40/25 up to SN 425
L2.82717.0	4-leaf barndoors, square (422 mm / 16.6") - for ARRI X 40/25 from SN 426
L2.82675.0	4-leaf barndoors, square (518 mm / 20.4") - for ARRI X60
L2.84240.0	4-leaf barndoors for CYC FLOOD
L2.84006.0	4-leaf barndoors for STUDIO COOL 2
L2.84066.0	4-leaf barndoors for STUDIO COOL 4
L2.74750.0	4-leaf barndoors (530 mm / 20.9")
L2.79065.0	4-leaf barndoors (580 mm / 22.8")
L2.37560.0	4-leaf barndoors (584 mm / 23.0")
L2.71100.0	4-leaf barndoors (740 mm / 29.1")

8-LEAF BARndoors:

Ident. No.	Description
L2.79500.0	8-leaf barndoors (168 mm / 6.6")
L2.39700.0	8-leaf barndoors, True Blue (197 mm / 7.8")
L2.39900.0	8-leaf barndoors, True Blue (245 mm / 9.7")
L2.40960.0	8-leaf barndoors, True Blue (344 mm / 13.5")
L2.81210.0	8-leaf barndoors (413 mm / 16.3")

FLEXDOOR:

Ident. No.	Description
L2.0013877	FlexDoor for SkyPanel S30
L2.0013878	FlexDoor for SkyPanel S60
L2.0012922	FlexDoor for SkyPanel S120-C

FILTER FRAMES



FILTER FRAMES - CIRCULAR SHAPE:

Ident. No.	Description
------------	-------------

L2.79395.0	Filter frame (78 mm / 3.1")
L2.79190.0	Filter frame (130 mm / 5.1")
L2.79490.0	Filter frame (168 mm / 6.6")
L2.79690.0	Filter frame (197 mm / 7.8")
L2.79890.0	Filter frame (230 mm / 9.1")
L2.80970.0	Filter frame (330 mm / 13.0")
L2.81220.0	Filter frame (400 mm / 15.8")
L2.82155.0	Filter frame (495 mm / 19.5")
L2.71110.0	Filter frame (740 mm / 29.1")

FILTER FRAMES - SQUARE SHAPE:

Ident. No.	Description
------------	-------------


L2.30059.0	Filter frame for Caster
L2.84245.0	Filter frame for CYC FLOOD
L2.84064.0	Filter frame for STUDIO COOL 4
L2.84007.0	Filter frame for STUDIO COOL 2
L2.84146.0	Filter frame for STUDIO COOL 2+2

SPILL FRAMES:

Ident. No.	Description
------------	-------------

L2.33817.0	Filter frame for Theater cassette (245 mm / 9.7")
L2.34067.0	Spill frame (413 mm / 16.3")
L2.0012833	Spill frame SkyPanel S120-C

SPILL RINGS, DIFFUSION, SNOOTS & LOUVERS

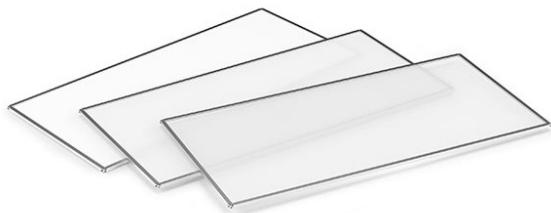

SPILL RINGS:

Ident. No.	Description
L2.37207.0	Spill Ring (230 mm / 9.1")
L2.0008983	Spill Ring L10 (329 mm / 12,9")
L2.37670.0	Spill Ring (330 mm / 13.0")
L2.37305.0	Spill Ring (400 mm / 15.8")
L2.37561.0	Spill Ring (571 mm / 22.5")

L2.37207.0	Spill Ring (230 mm / 9.1")
L2.0008983	Spill Ring L10 (329 mm / 12,9")
L2.37670.0	Spill Ring (330 mm / 13.0")
L2.37305.0	Spill Ring (400 mm / 15.8")
L2.37561.0	Spill Ring (571 mm / 22.5")

DIFFUSION:

Ident. No.	Description
L2.30058.0	Folding Intensifier for Caster
L2.0007325	Standard Diffusion for SkyPanel S30 - 107° HPA*
L2.0007326	Heavy Diffusion for SkyPanel S30 - 114° HPA*
L2.0007327	Lite Diffusion for SkyPanel S30 - 105° HPA*
L2.0007823	Intensifier for SkyPanel S30-C - 73° HPA*
L2.0008189	Extra Diffusion Slot for SkyPanel S30
L0.0008468	Diffusion Kit S30 (Lite & Heavy Diffusor, Intensifier & Panel Carrying Bag)
L2.0003345	Standard Diffusion for SkyPanel S60 - 107° HPA*
L2.0003903	Heavy Diffusion for SkyPanel S60 - 114° HPA*
L2.0003904	Lite Diffusion for SkyPanel S60 - 105° HPA*
L2.0007818	Intensifier for SkyPanel S60-C - 73° HPA*
L2.0008188	Extra Diffusion Slot for SkyPanel S60
L0.0008461	Diffusion Kit S60 (Lite & Heavy Diffusor, Intensifier & Panel Carrying Bag)
L2.0009501	Standard Diffusion for SkyPanel S120-C - 107° HPA*
L2.0009500	Heavy Diffusion for SkyPanel S120-C - 114° HPA*
L2.0009502	Lite Diffusion for SkyPanel S120-C - 105° HPA*

L2.30058.0	Folding Intensifier for Caster
L2.0007325	Standard Diffusion for SkyPanel S30 - 107° HPA*
L2.0007326	Heavy Diffusion for SkyPanel S30 - 114° HPA*
L2.0007327	Lite Diffusion for SkyPanel S30 - 105° HPA*
L2.0007823	Intensifier for SkyPanel S30-C - 73° HPA*
L2.0008189	Extra Diffusion Slot for SkyPanel S30
L0.0008468	Diffusion Kit S30 (Lite & Heavy Diffusor, Intensifier & Panel Carrying Bag)
L2.0003345	Standard Diffusion for SkyPanel S60 - 107° HPA*
L2.0003903	Heavy Diffusion for SkyPanel S60 - 114° HPA*
L2.0003904	Lite Diffusion for SkyPanel S60 - 105° HPA*
L2.0007818	Intensifier for SkyPanel S60-C - 73° HPA*
L2.0008188	Extra Diffusion Slot for SkyPanel S60
L0.0008461	Diffusion Kit S60 (Lite & Heavy Diffusor, Intensifier & Panel Carrying Bag)
L2.0009501	Standard Diffusion for SkyPanel S120-C - 107° HPA*
L2.0009500	Heavy Diffusion for SkyPanel S120-C - 114° HPA*
L2.0009502	Lite Diffusion for SkyPanel S120-C - 105° HPA*

SPILL RINGS, DIFFUSION, SNOOTS & LOUVERS

DIFFUSION:

Ident. No.	Description
L2.0009503	Intensifier for SkyPanel S120-C - 73° HPA*
L2.0009681	Extra Diffusion Slot for SkyPanel S120-C
L0.0015070	Diffusion Kit S120-C (Lite & Heavy Diffusor, Intensifier & Panel Carrying Bag)
L2.0015014	Standard Diffusion for SkyPanel S360-C - 107° HPA*
L2.0015013	Heavy Diffusion for SkyPanel S360-C - 114° HPA*
L2.0015016	Lite Diffusion for SkyPanel S360-C - 105° HPA*
L2.0015022	Intensifier for SkyPanel S360-C - 73° HPA*
L2.37208.0	Frosted glass (242 mm / 9.5")
L2.0001006	Frosted glass (330 mm / 13.0")

SNOOTS:

Ident. No.	Description
L2.0008019	Snoot for SkyPanel S30
L2.0007999	Snoot for SkyPanel S60
L2.0009680	Snoot for SkyPanel S120-C
L2.0016381	DoPchoice Snoot for SkyPanel S360-C
L2.79390.0	Snoot (78 mm / 3.1")
L2.79180.0	Snoot (130 mm / 5.1")
L2.79480.0	Snoot (168 mm / 6.6")
L2.79680.0	Snoot (197 mm / 7.8") with variable aperture
L2.79880.0	Snoot (245 mm / 9.7") with variable aperture
L2.80975.0	Snoot (344 mm / 13.5") with variable aperture
L2.81225.0	Snoot (413 mm / 16.3") with variable aperture
L2.37941.0	Snoot (740 mm / 29.1") with variable frame

LOUVERS:

Ident. No.	Description
L2.0008048	4-Chamber Eggcrate for SkyPanel S30
L2.0008064	Honeycomb 60° for SkyPanel S30
L2.0008065	Honeycomb 30° for SkyPanel S30
L2.0007977	8-Chamber Eggcrate for SkyPanel S60
L2.0008058	Honeycomb 60° for SkyPanel S60
L2.0008059	Honeycomb 30° for SkyPanel S60
L2.0009690	16-Chamber Eggcrate for SkyPanel S120-C
L2.0009561	Honeycomb 60° for SkyPanel S120-C
L2.0009562	Honeycomb 30° for SkyPanel S120-C
L2.0014979	Honeycomb 60° for SkyPanel S360-C
L2.0014978	Honeycomb 30° for SkyPanel S360-C

PLA

SPILL RINGS, DIFFUSION, SNOOTS & LOUVERS

LOUVERS:

Ident. No.	Description
L2.84065.A	Eggcrate, SPS3, silver, flood, red (13 mm / 0.5")
L2.84065.C	Eggcrate, SPH6, silver, medium, blue (15 mm / 0.6")
L2.84065.D	Eggcrate, BTS3, black, narrow, black (13 mm / 0.5")
L2.84005.A	Eggcrate, SPS3, silver, flood, red (13 mm / 0.5")
L2.84005.C	Eggcrate, SPH6, silver, medium, blue (15 mm / 0.6")
L2.84005.D	Eggcrate, BTS3, black, narrow, black (13 mm / 0.5")
L2.84139.C	Eggcrate, SPH6, silver, medium, blue (15 mm / 0.6")
L2.84139.D	Eggcrate, BTS3, black, narrow, black (13 mm / 0.5")

SKYBENDER:

Ident. No.	Description
L2.0010271	SkyBender for SkyPanel S30-C
L2.0009611	SkyBender for SkyPanel S60-C
L2.0010352	SkyBender for SkyPanel S120-C

ACCESSORY HOLDERS, SPEED RINGS & SOFTBOXES



ACCESSORY HOLDERS & SPEED RINGS

Ident. No.	Description	Price / EURO
L2.76107.0	Speed Ring, outer ring (2415) (157 mm / 6.2")	in connection with L2.76102.0 or L2.70824.0
L2.70837.0	Speed Ring, outer ring (2421) (191 mm / 7.5")	in connection with L2.70898.0
L2.70824.0	Speed Ring, adapter for ARRILUX 200 with Lighthouse	in connection with L2.76107.0
L2.70898.0	Speed Ring, adapter for ARRILUX 400 with Lighthouse	in connection with L2.70837.0
L2.76102.0	Speed Ring, adapter bracket for ARRILUX 125	in connection with L2.76107.0
L2.89070.0	Speed Ring circular (9790) (78 mm / 3.1")	fits Video Pro Lightbanks
L2.89067.0	Speed Ring circular (9640) (130 mm / 5.1")	fits Video Pro Lightbanks
L2.89068.0	Speed Ring circular (9670) (168 mm / 6.6")	fits Video Pro Lightbanks
L2.89074.0	Speed Ring circular metal (9670AL) (168 mm / 6.6")	fits Video Pro Lightbanks
L2.89069.0	Speed Ring circular (9672) (168 mm / 6.6")	fits Daylite Junior Lightbanks
L2.76246.0	Speed Ring circular (9190) (197 mm / 7.8")	fits Video Pro Lightbanks
L2.89060.0	Speed Ring circular (9192) (197 mm / 7.8")	fits Daylite Junior Lightbanks
L2.76248.0	Speed Ring circular (9205) (245 mm / 9.7")	fits Quartz/Daylite Lightbanks
L2.89061.0	Speed Ring circular (9225) (255 mm / 10.0")	fits Quartz/Daylite Lightbanks
L2.76247.0	Speed Ring circular (9305) (343 mm / 13.5")	fits Quartz/Daylite Lightbanks
L2.89062.0	Speed Ring circular (9365) (411 mm / 16.2")	fits Quartz/Daylite Lightbanks
L2.89063.0	Speed Ring circular (9435) (508 mm / 20,0")	für Quartz/Daylite Lightbanks
L2.89077.0	Speed Ring circular (9445) (530 mm / 20,9")	für Quartz/Daylite Lightbanks
L2.37475.0	Speed Ring circular (9465) (581 mm / 22,9")	für Quartz/Daylite Lightbanks
L2.89064.0	Speed Ring circular (9464) (735 mm / 29,0")	für Daylite Senior Lightbanks
L2.36780.0	Accessory Holder for ARRILITE 750 Plus	

ACCESSORY HOLDERS, SPEED RINGS & SOFTBOXES

SOFTBOXES AND ACCESSORIES FOR SKYPANEL

Ident. No.	Description	
L2.0015899	Chimera Lantern with Skirt for SkyPanel S30	NEW
L2.0020498	Chimera POP Bank for SkyPanel S30	NEW
L2.0021388	Chimera Lightbank with Brackets for SkyPanel S30	NEW
L2.0008142	DoPchoice SnapGrid 40° for SkyPanel S30	
L2.0008140	DoPchoice SnapGrid 40° for SnapBag SkyPanel S30	
L2.0008141	DoPchoice SnapBag for SkyPanel S30	
L2.0020274	DoPchoice Octa 4 for SkyPanel S30	NEW
L2.0020275	DoPchoice SnapGrid 40° for Octa 4	NEW
L2.0015900	Chimera Lantern with Skirt for SkyPanel S60	NEW
L2.0020499	Chimera POP Bank for SkyPanel S60	NEW
L2.0021390	Chimera Shallow Lightbank with Brackets for SkyPanel S60	NEW
L2.0021389	Chimera Lightbank with Brackets for SkyPanel S60	NEW
L2.0008144	DoPchoice SnapGrid 40° for SkyPanel S60	
L2.0008143	DoPchoice SnapGrid 40° for SnapBag SkyPanel S60	
L2.0008145	DoPchoice SnapBag for SkyPanel S60	
L2.0016159	DoPchoice Octa 5 for SkyPanel S60 (no Bracket)	NEW
L2.0016163	DoPchoice Octa 5 for SkyPanel S60 (incl. Bracket)	NEW
L2.0020276	DoPchoice SnapGrid 40° for Octa 5	NEW
L2.0016165	DoPchoice Octa 7 for SkyPanel S60 (no Bracket)	NEW
L2.0016160	DoPchoice Octa 7 for SkyPanel S60 (incl. Bracket)	NEW
L2.0020277	DoPchoice SnapGrid 40° for Octa 7	NEW
L2.0013180	Chimera Lightbank with brackets for SkyPanel S120-C	
L2.0021309	Chimera POP Bank for SkyPanel S120	NEW
L2.0010382	DoPchoice SnapGrid 40x60° for SkyPanel S120-C	
L2.0010383	DoPchoice SnapBag for SkyPanel S120-C	
L2.0010381	DoPchoice SnapGrid for SnapBag SkyPanel S120-C	
L2.0016383	DoPchoice SnapGrid 40° for SkyPanel S360-C	NEW
L2.0016382	DoPchoice SnapBox for SkyPanel S360-C	NEW
L2.0020278	DoPchoice SnapBag 6'x6' for SkyPanel S360-C	NEW
L2.0020279	DoPchoice SnapGrid 40° for SnapBag SkyPanel S360-C	NEW
L2.0015977	Chimera Universal Brackets for SkyPanel (suitable for S30 / S60 / S120)	NEW

PLA

ACCESSORY HOLDERS, SPEED RINGS & SOFTBOXES

VIDEO PRO PLUS SOFTBOXES

„Plus“ Softboxes incl. 3 front screens

Ident. No.	Description
L2.76106.0	Chimera Lightbank Video Pro Plus "XXS", incl. 3 front screens (8105) size: 12 x 16" / 30 x 40 cm; depth: 10" / 25 cm
L2.76719.0	Chimera Lightbank Video Pro Plus "XS", incl. 3 front screens (8115) size: 16 x 22" / 40 x 55 cm; depth: 12" / 30 cm
L2.70844.0	Chimera Lightbank Video Pro Plus "S", incl. 3 front screens (8125) size: 24 x 32" / 60 x 80 cm; depth: 18" / 45 cm
L2.70940.0	Chimera Lightbank Video Pro Plus "M", incl. 3 front screens (8135) size: 36 x 48" / 90 x 120 cm; depth: 24" / 60 cm

QUARTZ PLUS SOFTBOXES

„Plus“ Softboxes incl. 3 front screens

Ident. No.	Description
L2.89054.0	Chimera Lightbank Quartz Plus "S", incl. 3 front screens (8425) size: 24 x 32" / 60 x 80 cm; depth: 22" / 55 cm
L2.89055.0	Chimera Lightbank Quartz Plus "M", incl. 3 front screens (8435) size: 36 x 48" / 90 x 120 cm; depth: 29" / 75 cm
L2.89056.0	Chimera Lightbank Quartz Plus "L", incl. 3 front screens (8445) size: 54 x 72" / 135 x 180 cm; depth: 38" / 95 cm


DAYLITE JUNIOR SOFTBOXES

Ident. No.	Description
L2.89053.0	Chimera Lightbank Daylite Junior Plus "S", incl. 3 front screens (8225) size: 24 x 32" / 60 x 80 cm; depth: 27" / 70 cm
L2.89058.0	Chimera Lightbank Daylite Plus "M", incl. 3 front screens (8635) size: 36 x 48" / 90 x 120 cm; depth: 40" / 100 cm
L2.89059.0	Chimera Lightbank Daylite Plus "L", incl. 3 front screens (8645) size: 54 x 72" / 135 x 180 cm; depth: 48" / 120 cm

This page is intentionally left blank.

PLA

CONVERSION FILTERS, PHOSPHOR PANELS & PROTECTIVE GLASSES

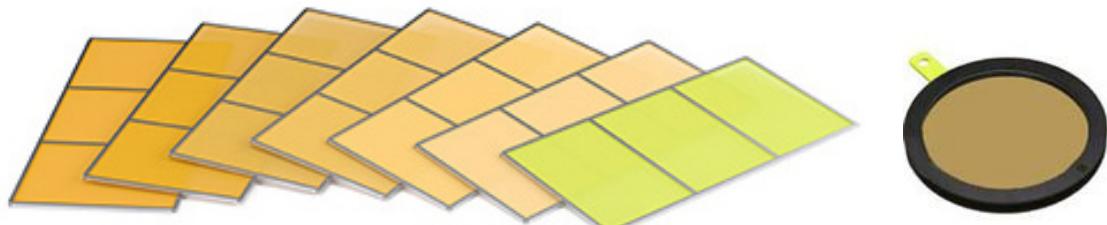

CONVERSION FILTERS:

Ident. No.	Description
L2.73488.0	Conversion Filter 3/4 CTO, 5600 to 3200 K (78 mm / 3.1")
L2.74264.0	Conversion Filter 1/2 CTO, 5600 to 3800 K (78 mm / 3.1")
L2.74266.0	Conversion Filter 1/4 CTO, 5600 to 4500 K (78 mm / 3.1")
L2.74268.0	Conversion Filter 1/8 CTO, 5600 to 4900 K (78 mm / 3.1")
L2.70819.0	Conversion Filter 3/4 CTO, 5600 to 3200 K (112 mm / 4.4")
L2.70846.0	Conversion Filter 3/4 CTO, 5600 to 3200 K (130 mm / 5.1")
L2.77180.0	ARRI filter pack (each 2x Frost F2, Heavy Frost 129, Daylight Blue Frost 224, Daylight 3/4 Blue 201)

REMOTE PHOSPHOR:

Ident. No.	Description
L2.0007520	Remote Phosphor Panel for SkyPanel S30-RP - 2,700 K
L2.0007521	Remote Phosphor Panel for SkyPanel S30-RP - 3,200 K
L2.0007522	Remote Phosphor Panel for SkyPanel S30-RP - 4,300 K
L2.0007523	Remote Phosphor Panel for SkyPanel S30-RP - 5,600 K
L2.0007524	Remote Phosphor Panel for SkyPanel S30-RP - 6,500 K
L2.0007789	Remote Phosphor Panel for SkyPanel S30-RP - 10,000 K
L2.0007525	Remote Phosphor Panel for SkyPanel S30-RP - Chroma Green
L2.0003347	Remote Phosphor Panel for SkyPanel S60-RP - 2,700 K
L2.0003348	Remote Phosphor Panel for SkyPanel S60-RP0 - 3,200 K
L2.0003349	Remote Phosphor Panel for SkyPanel S60-RP - 4,300 K
L2.0003350	Remote Phosphor Panel for SkyPanel S60-RP - 5,600 K
L2.0003346	Remote Phosphor Panel for SkyPanel S60-RP- 6,500 K
L2.0007778	Remote Phosphor Panel for SkyPanel S60-RP - 10,000 K
L2.0003351	Remote Phosphor Panel for SkyPanel S60-RP - Chroma Green

CONVERSION FILTERS, PHOSPHOR PANEL & PROTECTIVE GLASSES

PANEL CARRYING BAGS:

Ident. No.	Description
L2.0008309	Accessory Bag for SkyPanel S30 panels (for max. 4 panels or honeycombs)
L2.0008306	Accessory Bag for SkyPanel S60 panels (for max. 4 panels or honeycombs)
L2.0013780	Accessory Bag for SkyPanel S120-C panels (for max. 4 panels or honeycombs)

PROTECTIVE GLASSES:

Ident. No.	Description
L2.82249.0	UV protective glass, frosted for ARRI X 5
L2.82774.0	UV protective glass, frosted for ARRI X 12 (from SN 251)
L2.82740.0	UV protective glass, frosted for ARRI X 40/25 (from SN 553)
L2.71195.0	UV-protection glass Retrofit for ARRI Daylight 18/12; for the change from fresnel lens to UV-protection glass to get hard shadows

LENSES



LENSES FOR ARRILUX:

Ident. No.	Description
------------	-------------

78 mm / 3.1"

L0.73492.0	ARRILUX 125 lens set (78 mm / 3.1") (narrow flood, flood, super flood, super flood frosted)
L2.73402.0	ARRILUX 125 narrow flood lens, black (78 mm / 3.1")
L2.73404.0	ARRILUX 125 flood lens, green (78 mm / 3.1")
L2.73462.0	ARRILUX 125 super flood lens, red (78 mm / 3.1")
L2.73464.0	ARRILUX 125 super flood lens frosted, silver (78 mm / 3.1")
L2.73403.0	ARRILUX 125 empty ring for lenses and CTO's (78 mm / 3.1")

112 mm / 4.4"

L0.70830.0	ARRILUX 200 lens set (112 mm / 4.4") (narrow flood, flood, super flood, super flood frosted)
L2.70832.0	ARRILUX 200 narrow flood lens, black (112 mm / 4.4")
L2.70833.0	ARRILUX 200 flood lens, green (112 mm / 4.4")
L2.70834.0	ARRILUX 200 super flood lens, red (112 mm / 4.4")
L2.70835.0	ARRILUX 200 super flood lens frosted, silver (112 mm / 4.4")

LENSES

DROP-IN LENSES:

Ident. No. Description

130 mm / 5.1"

L0.77824.0 5 DROP-IN lens set (130 mm / 5.1")
(spot, narrow flood, flood, super flood, super flood frosted)

L0.77825.0 4 DROP-IN lens set (130 mm / 5.1")
(spot, narrow flood, flood, super flood)

L2.77826.0 DROP-IN lens, spot, blue (130 mm / 5.1")

L2.77828.0 DROP-IN lens, narrow flood, small rectangle, black (130 mm / 5.1")

L2.77830.0 DROP-IN lens, flood, large rectangle, green (130 mm / 5.1")

L2.77832.0 DROP-IN lens, super flood, honeycomb, red (130 mm / 5.1")

L2.77834.0 DROP-IN lens, super flood frosted, honeycomb, silver (130 mm / 5.1")

175 mm / 6.9"

L0.77862.0 5 DROP-IN lens set (175 mm / 6.9")
(spot, narrow flood, flood, super flood, super flood frosted)

L0.77863.0 4 DROP-IN lens set (175 mm / 6.9")
(spot, narrow flood, flood, super flood)

L2.77864.0 DROP-IN lens, spot, blue (175 mm / 6.9")

L2.77866.0 DROP-IN lens, narrow flood, small rectangle, black (175 mm / 6.9")

L2.77868.0 DROP-IN lens, flood, large rectangle, green (175 mm / 6.9")

L2.77870.0 DROP-IN lens, super flood, honeycomb, red (175 mm / 6.9")

L2.77872.0 DROP-IN lens, super flood frosted, honeycomb, silver (175 mm / 6.9")

250 mm / 9.8"

L0.76817.0 5 DROP-IN lens set (250 mm / 9.8"), incl. case
(spot, narrow flood, flood, super flood, super flood frosted)

L0.76818.0 4 DROP-IN lens set (250 mm / 9.8"), incl. case
(spot, narrow flood, flood, super flood)

L2.76821.0 DROP-IN lens, spot, blue (250 mm / 9.8")

L2.76822.0 DROP-IN lens, narrow flood, small rectangle, black (250 mm / 9.8")

L2.76823.0 DROP-IN lens, flood, large rectangle, green (250 mm / 9.8")

L2.76824.0 DROP-IN lens, super flood, honeycomb, red (250 mm / 9.8")

L2.76825.0 DROP-IN lens, super flood frosted, honeycomb, silver (250 mm / 9.8")

300 mm / 11.8"

L0.76864.0 5 DROP-IN lens set (300 mm / 11.8"), incl. case
(spot, narrow flood, flood, super flood, super flood frosted)

L0.76865.0 4 DROP-IN lens set (300 mm / 11.8"), incl. case
(spot, narrow flood, flood, super flood)

L2.76867.0 DROP-IN lens, spot, blue (300 mm / 11.8")

L2.76868.0 DROP-IN lens, narrow flood, small rectangle, black (300 mm / 11.8")

L2.76869.0 DROP-IN lens, flood, large rectangle, green (300 mm / 11.8")

L2.76870.0 DROP-IN lens, super flood, honeycomb, red (300 mm / 11.8")

L2.76871.0 DROP-IN lens, super flood frosted, honeycomb, silver (300 mm / 11.8")

LENSES

DROP-IN LENSES:

Ident. No.	Description
420 mm / 16.5"	
L0.76882.0	5 DROP-IN lens set (420 mm / 16.5"), incl. case (spot, narrow flood, flood, super flood, super flood frosted)
L0.76885.0	4 DROP-IN lens set (420 mm / 16.5"), incl. case (spot, narrow flood, flood, super flood)
L2.76887.0	DROP-IN lens, spot, blue (420 mm / 16.5")
L2.76888.0	DROP-IN lens, narrow flood, small rectangle, black (420 mm / 16.5")
L2.76889.0	DROP-IN lens, flood, large rectangle, green (420 mm / 16.5")
L2.76890.0	DROP-IN lens, super flood, honeycomb, red (420 mm / 16.5")
L2.76891.0	DROP-IN lens, super flood frosted, honeycomb, silver (420 mm / 16.5")
500 mm / 19.7"	
L0.77920.0	5 DROP-IN lens set (500 mm / 19.7"), incl. case (spot, narrow flood, flood, super flood, super flood frosted)
L0.77921.0	4 DROP-IN lens set (500 mm / 19.7"), incl. case (spot, narrow flood, flood, super flood)
L2.77923.0	DROP-IN lens, spot, blue (500 mm / 19.7")
L2.77926.0	DROP-IN lens, narrow flood, small rectangle, black (500 mm / 19.7")
L2.77924.0	DROP-IN lens, flood, large rectangle, green (500 mm / 19.7")
L2.77925.0	DROP-IN lens, super flood, honeycomb, red (500 mm / 19.7")
L2.77928.0	DROP-IN lens, super flood frosted, honeycomb, silver (500 mm / 19.7")

LENS CASES:

Ident. No.	Description
L2.76827.0	Lens case for 5 lenses up to Ø 330 mm / 13.0", empty (36 x 21 x 41 cm)
L2.77483.0	Lens case for 5 lenses up to Ø 420 mm / 16.5", empty (47 x 34 x 49 cm)
L2.77932.0	Lens case for 5 lenses up to Ø 495 mm / 19.5", empty (66 x 35 x 69 cm), expandable for Ø 600 mm lenses
L2.77922.0	Lens case for 5 lenses up to Ø 600 mm / 23.6", empty (66 x 35 x 69 cm)
L2.77818.0	Lens bag for max. 5 lenses up to Ø 235 mm / 9.3", empty

SCRIMS & SCRIM BAGS



SCRIMS:

Ident. No.	Description
78 mm / 3.1"	
L2.73466.0	Set of 4 scrims (78 mm / 3.1")
L2.73466.A	Scrim, full single (78 mm / 3.1")
L2.73466.B	Scrim, full double (78 mm / 3.1")
L2.73466.C	Scrim, half single (78 mm / 3.1")
L2.73466.D	Scrim, half double (78 mm / 3.1")
130 mm / 5.1"	
L2.79160.0	Set of 4 scrims (130 mm / 5.1")
L2.79160.A	Scrim, full single (130 mm / 5.1")
L2.79160.B	Scrim, full double (130 mm / 5.1")
L2.79160.C	Scrim, half single (130 mm / 5.1")
L2.79160.D	Scrim, half double (130 mm / 5.1")
168 mm / 6.6"	
L2.79460.0	Set of 4 scrims (168 mm / 6.6")
L2.79460.A	Scrim, full single (168 mm / 6.6")
L2.79460.B	Scrim, full double (168 mm / 6.6")
L2.79460.C	Scrim, half single (168 mm / 6.6")
L2.79460.D	Scrim, half double (168 mm / 6.6")
197 mm / 7.8"	
L2.79660.0	Set of 4 scrims (197 mm / 7.8")
L2.79660.A	Scrim, full single (197 mm / 7.8")
L2.79660.B	Scrim, full double (197 mm / 7.8")
L2.79660.C	Scrim, half single (197 mm / 7.8")
L2.79660.D	Scrim, half double (197 mm / 7.8")

SCRIMS & SCRIM BAGS

SCRIMS:

Ident. No.	Description
230 mm / 9.1"	
L2.79860.0	Set of 4 scrims (230 mm / 9.1")
L2.79860.A	Scrim, full single (230 mm / 9.1")
L2.79860.B	Scrim, full double (230 mm / 9.1")
L2.79860.C	Scrim, half single (230 mm / 9.1")
L2.79860.D	Scrim, half double (230 mm / 9.1")
254 mm / 10.0"	
L2.76950.0	Set of 4 scrims (254 mm / 10.0")
L2.76950.A	Scrim, full single (254 mm / 10.0")
L2.76950.B	Scrim, full double (254 mm / 10.0")
L2.76950.C	Scrim, half single (254 mm / 10.0")
L2.76950.D	Scrim, half double (254 mm / 10.0")
330 mm / 13.0"	
L2.80980.0	Set of 4 scrims (330 mm / 13.0")
L2.80980.A	Scrim, full single (330 mm / 13.0")
L2.80980.B	Scrim, full double (330 mm / 13.0")
L2.80980.C	Scrim, half single (330 mm / 13.0")
L2.80980.D	Scrim, half double (330 mm / 13.0")
400 mm / 15.8"	
L2.81230.0	Set of 4 scrims (400 mm / 15.8")
L2.81230.A	Scrim, full single (400 mm / 15.8")
L2.81230.B	Scrim, full double (400 mm / 15.8")
L2.81230.C	Scrim, half single (400 mm / 15.8")
L2.81230.D	Scrim, half double (400 mm / 15.8")
495 mm / 19.5"	
L2.82160.0	Set of 4 scrims (495 mm / 19.5")
L2.82160.A	Scrim, full single (495 mm / 19.5")
L2.82160.B	Scrim, full double (495 mm / 19.5")
L2.82160.C	Scrim, half single (495 mm / 19.5")
L2.82160.D	Scrim, half double (495 mm / 19.5")
530 mm / 20.9"	
L2.70634.0	Set of 4 scrims (530 mm / 20.9")
L2.70634.A	Scrim, full single (530 mm / 20.9")
L2.70634.B	Scrim, full double (530 mm / 20.9")
L2.70634.C	Scrim, half single (530 mm / 20.9")
L2.70634.D	Scrim, half double (530 mm / 20.9")

PLA

SCRIMS & SCRIM BAGS

SCRIMS:

Ident. No. Description

571 mm / 22.5"

L2.0008688	Set of 4 scrims (571 mm / 22.5")
L2.0008690	Scrim, full single (571 mm / 22.5")
L2.0008689	Scrim, full double (571 mm / 22.5")
L2.0008692	Scrim, half single (571 mm / 22.5")
L2.0008691	Scrim, half double (571 mm / 22.5")

740 mm / 29.1"

L2.71115.0	Set of 4 scrims (740 mm / 29.1")
L2.71115.A	Scrim, full single (740 mm / 29.1")
L2.71115.B	Scrim, full double (740 mm / 29.1")
L2.71115.C	Scrim, half single (740 mm / 29.1")
L2.71115.D	Scrim, half double (740 mm / 29.1")

SCRIM BAGS:

Ident. No. Description

L2.88908.1	Scrim Bag for 78 mm / 3.1" scrims
L2.88911.1	Scrim Bag for 130 mm / 5.1" scrims
L2.88912.1	Scrim Bag for 168 mm / 6.6" scrims
L2.88913.1	Scrim Bag for 197 mm / 7.8" scrims
L2.88914.1	Scrim Bag for 230 mm / 9.1" scrims
L2.88909.1	Scrim Bag for 254 mm / 10.0" scrims
L2.88915.1	Scrim Bag for 330 mm / 13.0" scrims
L2.88916.1	Scrim Bag for 400 mm / 15.8" scrims
L2.88917.1	Scrim Bag for 495 mm / 19.5" scrims
L2.88907.1	Scrim Bag for 530 mm / 20.1" scrims
L2.37563.1	Scrim Bag for 571 mm / 22.5" scrims
L2.89555.1	Scrim Bag for 740 mm / 29.1"scrims

LAMPS



DAYLIGHT:

Ident. No.	Description
L2.0003886	Lamp DIS 125 W/SE GZX 9,5 (Koto)
L2.0003876	Lamp DIS 200 W/SE GZY 9,5 UV-B (Koto)
L2.89251.0	Lampe HMI Digital 200 W/SE GZY9,5 UVS (Osram)
L2.0003875	Lamp DIS 400 W/SE GZZ 9,5 UV-B (Koto)
L2.0003874	Lamp DIS 575 W/SE G22 UV-B (Koto)
L2.89253L0	Lamp Digital HMI 575 W/SE G22 UVS (Osram)
L2.0003872	Lamp DIS 800 W/SE G22 UV-B (Koto)
L2.37240.0	Lamp HMI Digital 800 W/SEL G22 UVS (Osram)
L2.0003885	Lamp DIS 1200 W/SE G38 UV-B (Koto)
L2.89254L0	Lamp Digital HMI 1200 W/SE G38 UVS (Osram)
L2.0003884	Lamp DIS 1800 W/SE G38 (Koto)
L2.37590.0	Lamp HMI Digital 1800 W/SE G38 UVS (Osram)
L2.0003883	Lamp DIS 2500 W/SE G38 UV-B (Koto)
L2.89255.0	Lamp HMI 2500 W/SE XS G38 (Osram)
L2.0003882	Lamp DIS 4000 W/SE G38 UV-B (Koto)
L2.89256.0	Lamp HMI 4000 W/SE XS G38 (Osram)
L2.0003881	Lamp DIS 6000 W/SE G38 UV-B (Koto)
L2.89257.0	Lamp HMI 6000 W/SE G38 (Osram)
L2.0003879	Lamp DIS 9000 W/SE G38 (Koto)
L2.37482.0	Lamp HMI 9000 W/SE XS GX38 (Osram)
L2.0003880	Lamp DIS 12000 W/SE G38 UV-B (Koto)
L2.89261.0	Lamp HMI 12000 W/SE XS GX38 (Osram)

LAMPS

DAYLIGHT:

Ident. No.	Description
L2.0003877	Lamp DIS 18000 W/SE G51 (Koto)
L2.89262.0	Lamp HMI 18000 W/SE XS GX51 (Osram)
L2.89260.0	Lamp HMI 18000 W/DE XS S30 (Osram)

TUNGSTEN:

Ident. No.	Description
L2.89202.0	Lamp 150 W 230 V GX6,35 (Osram)
L2.89203.0	Lamp 300 W 240 V GY9,51 CP81 (Osram)
L2.89205.0	Lamp 650 W 230 V GY9,5 FRL CP89 (Osram)
L2.36800.0	Lamp 750 W / 230 V G9,5 2-Pin HPL* (Osram)
L2.89208.0	Lamp 1000 W 230 V G22 FKJ CP71 (Osram)
L2.89210.0	Lamp 1000 W 230 V R7S-15 P2/7 (Osram)
L2.89211.0	Lamp 1250 W 230 V R7s-15 P2/12 (Osram)
L2.89213.0	Lamp 2000 W 230 V G38 FKK CP73 (Osram)
L2.89212.0	Lamp 2000 W 230 V RX7s-21 FEX (Osram)
L2.89214.0	Lamp 5000 W 230 V G38 CP85 (Osram)
L2.89218.0	Lamp 20000 W 230 V G38 CP99 (Osram)

STANDS, WHEELS & OPERATING POLES



LIGHTWEIGHT STANDS FOR KITS:

Ident. No.	Description
L2.76975.0	Small ARRI Kit Stand LS.1 (050KA) - black aluminium lightweight stand, 2 risers, height 73 - 230 cm, closed 67 cm, spigot 16 mm, max. load 5 kg (fit wheels: 110)
L2.76965.0	Compact ARRI Kit Stand LS.01 (050MKA) - black aluminium lightweight stand, 3 risers, height 90 - 260 cm, closed 76 cm, spigot 16 mm, max. load 5 kg (fit wheels: 110)
L2.76976.0	Medium ARRI Kit Stand LS.2 (050A) - black aluminium lightweight stand, 2 risers, height 110 - 260 cm, closed 88 cm, spigot 16 mm, max. load 5 kg (fit wheels: 110)

LIGHTING STANDS - ALUMINIUM:

Ident. No.	Description
L2.88717.0	Universal ARRI Cine Stand LS.4 (007BA) - black aluminium universal stand with levelling leg, 2 risers, height 124 - 315 cm, closed 122 cm, with 16 mm & 28 mm fitting, max. load 12 kg (fit wheels 110)
L2.8803653	Master Stand (1004BAC) - black aluminium stand, 3 risers, height 124...366 cm, closed 107 cm, spigot 16 mm, max. load 9 kg
L2.8803225	Combo Alu Stand (A1035B) - black aluminium stand, 2 risers, height 168 - 350 cm, closed 142 cm, with 16 mm & 28 mm fitting, max. load 30 kg (fit wheels 90000A)

STANDS, WHEELS, OPERATING POLES

LIGHTING STANDS - STEEL:

Ident. No.	Description
L2.8803224	Combo Steel Stand (A1035CS) - chrome steel stand, 3 risers, height 168 - 350 cm, closed 142 cm, with 16 mm & 28 mm fitting, max. load 40 kg (fit wheels 90000A)
L2.76979.0	Universal ARRI Steel Stand LS.5 (126A) - chrome steel universal stand, 2 risers, height 131 - 333 cm, closed 131 cm, with 16 mm & 28 mm fitting, max. load 40 kg (fit wheels: 110)
L2.8800561	ARRI Wind-up Stand LS.6 (083NWA) - chrome steel universal stand with geared column, wheels with brakes, 1 riser, height 139...247 cm, closed 153 cm, with 16 mm & 28 mm fitting, max. load 45 kg (fit wheels: 104, 251)

WHEELS FOR STANDS:

Ident. No.	Description
L2.88679.0	Wheel set with brakes, Ø 75 mm / 22 mm mount (110)
L2.76959.0	Wheel set with brakes, Ø 75 mm / M10 mount with brakes (104)
L2.88096.0	Wheel set with brakes, Ø 160 mm / M10 mount with brakes (374)
L2.76980.0	Wheel set with brakes, Ø 125 mm / 25 x 25 mm square mount (90000A)

OPERATING POLES:

Ident. No.	Description
L2.89079.0	Operating pole 4 m (427B-4,0) 4 sections, 3 rises tube diameters: 28, 24, 20, 16 mm, min.: 140 cm, max.: 400 cm
L2.89080.0	Operating pole 6.5 m (427B-6,5) 4 sections, 3 rises tube diameters: 28, 24, 20, 16 mm, min.: 199 cm, max.: 650 cm

GRIP



CLAMPS:

Ident. No.	Description
L2.30992.0	ARRI Swiveling / Noga Arm
L2.76989.0	ARRI Swiveling C Clamp (C150)
L2.8803652	ARRI Super Clamp (035)
L2.88726.0	ARRI Quick Action Super Clamp - black (635)
L2.0005201	Ceiling Scissor Clamp with 5/8" spigot

ADAPTERS:

Ident. No.	Description
L2.0008082	Rail Mount Adapter for SkyPanel PSU
L2.0008070	V-Mount Battery Adapter Plate (SkyPanel)
L2.0008071	Battery Adapter Plate for Anton/Bauer (SkyPanel)
L2.0006921	Super Clamp Adapter for SkyPanel PSU
L2.0014566	Space Light Silk Mounting Adapter for SkyPanel S60
L2.30088.0	Adapter stud 16 mm + 120 mm for Gobo head mounting
L2.88681.0	Adapter spigot, 1/4" + 3/8", female threads
L2.88639.0	Female Adapter for 16 mm (5/8") spigot with 3/8" stud
L2.88212.0	Double female adapter 16 mm - 17 mm Pin (E400) (LE.4000.A)
L2.0005202	Baby Pin with 3/8" Threaded Stud

GRIP

SPIGOTS:

Ident. No.	Description
L2.40701.3	Spigot 28 mm, long, with flange & allen screw, fits profile stirrups without sleeve cuff
L2.40701.4	Spigot 28 mm with 16 mm socket, without flange, with screw (for stand operation)
L2.76986.0	Stud 16 mm with thread 3/8" (036-38), plugs into Superclamp (035)
L2.0005202	Baby Pin with 3/8" Threaded Stud

OTHER:

Ident. No.	Description
L2.30089.0	Caster stirrup with battery pack attachment
L2.74144.0	Ballast mount bracket with 16 mm socket
L2.30130.0	Multi Connector joining bracket with stud 16 mm / 5/8 ",for two Casters
L2.88459.0	3" Mounting baby plate male with swivel pin (LF.8010.A)
L2.73408.0	Handgrip, 16 mm spigot size with thread 3/8", light weight
L2.76038.0	Mounting Bracket for ARRILUX PocketPAR 125 (spare part for ARRI Adapter Bracket L2.76102.0)
L2.0000885	T12 Top latch for heavy accessories

YOKES:

Ident. No.	Description
L2.0008078	Center Mount Yoke (SkyPanel)
L2.0008080	Fixed Center Mount Yoke (SkyPanel)
L2.0014136	SkyPanel Side Handles (2 pcs.)
L2.0015050	SkyPanel Center Mount Handling Kit (incl. Center Mount Yoke and SkyPanel Side Handles)
L2.0008184	Double Vertical Yoke for SkyPanel S30
L2.0008098	Double Vertical Yoke for SkyPanel S60
L2.0010180	Double Vertical Yoke for SkyPanel S120-C
L2.0015929	Short Yoke for SkyPanel S360-C (incl. Pin)

PLA

SAFETY CABLES:

Ident. No.	Description
L2.76809.0	Safety cable (3 mm) 0.6 m, max. load 5 kg
L2.76990.0	Safety cable (4 mm) 1 m, max. load 16 kg
L2.80864.0	Safety cable (5 mm) 1 m, max. load 25 kg
L2.80866.0	Safety cable (6 mm) 1 m, max. load 36 kg
L2.0009000	Safety cable (8 mm) 1 m, max. load 64 kg
L2.0015517	Safety cable (10 mm) 1 m, max. load 100 kg

LAMPHEAD CONTROL



SKYPANEL REMOTE:

Ident. No.	Description
L2.0012973	SkyPanel Remote
L2.0013861	SkyPanel Remote USB cable, 5 m
L2.0013945	SkyPanel Remote Carrying Pouch

SKYLINK:

Ident. No.	Description
L2.0016357	SkyLink Receiver
L2.0016359	SkyLink Base Station - Edison
L2.0016360	SkyLink Base Station - Schuko
L0.0020060	SkyLink 3 Receiver Kit (with Base Station) - Edison
L0.0020058	SkyLink 3 Receiver Kit (with Base Station) - Schuko
L0.0020062	SkyLink 10 Receiver Kit (with Base Station) - Edison
L0.0020061	SkyLink 10 Receiver Kit (with Base Station) - Schuko
L2.0019288	SkyLink Wifi Range Extender

NEW

STELLAR:

Ident. No.	Description
-	Stellar - App Store monthly*
-	Stellar - App Store yearly*
-	Stellar - Google Play Store monthly*
-	Stellar - Google Play Store yearly*

NEW

NEW

NEW

NEW

OTHER ACCESSORIES



POWER SUPPLY:

Ident. No.	Description
L2.0007735	Power Supply Unit for SkyPanel S30 - blue/silver
L2.0007886	Power Supply Unit for SkyPanel S30 - black
L2.0012491	Power Supply Unit for SkyPanel S60/S120-C - blue/silver
L2.0012492	Power Supply Unit for SkyPanel S60/S120-C - black
L2.0015249	Power Supply Unit for SkyPanel S360-C - blue/silver
L2.30083.0	LoCaster Power Supply, max. 70 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 1 x 24 V DC/ 3 A (4-pin XLR)
L2.30084.0	BroadCaster Power Supply, max. 300 W Input: 100 - 240 V~, 50/60 Hz, Schuko-Plug Output: 24 V / 6 A, 3 x PowerDMX (4-pin XLR)

CONVERSION KITS:

Ident. No.	Description
L2.77572.2	Conversion Kit from M18 to AS18: PAR Reflector, three brackets and one top latch
L2.37682.2	Conversion Kit from AS18 to M18: MAX Reflector, three brackets and one top latch
L2.37385.0	Conversion Kit from M40 to AS40: PAR Reflector, three brackets and one top latch
L2.37388.0	Conversion Kit from AS40 to M40: MAX Reflector, three brackets and one top latch
L2.39712.0	Conversion Kit from TRUE BLUE T1 MAN to P.O. version: stirrup for pole operated pan, tilt and focus
L2.33811.0	Conversion Kit from TRUE BLUE ST1 and T2 to theatre version: theatre cassette with barndoors (theatre cassette)
L2.34065.0	Conversion Kit from TRUE BLUE ST5 to theatre version: theatre cassette with barndoors (theatre cassette)
L2.84070.0	Conversion Kit from STUDIO COOL 4 and 2+2 MAN to P.O. version: stirrup for pole operated pan, tilt and focus
L2.84175.0	Conversion Kit from STUDIO COOL 2 MAN to P.O. version: stirrup for pole operated pan, tilt and focus

OTHER ACCESSORIES

CONVERSION KITS:

Ident. No.	Description
L2.0000655	Conversion Kit ARRISUN 18 Event: set 4 longer brackets and spillring for improved optical quality
L2.83396.0	Retrofit lampcarriage with fan for STUDIO T24 (200 V version)
L2.0003894	L7-C LE2 Upgrade: Brightness Upgrade for L7-C with first generation Light Engine
L2.0005922	L7-C LE2 Upgrade - Hybrid Version: Brightness Upgrade for L7-C Hybrid with first generation Light Engine

REFLECTOR:

Ident. No.	Description
L2.37940.0	Spot reflector for ARRIMAX 18/12, 8° - 15° HPA*
L2.70790.0	Reflector housing PAR for ARRILUX 200 (retrofit from PocketLITE to PocketPAR)
L2.70880.0	Reflector housing PAR for ARRILUX 400 (retrofit from PocketLITE to PocketPAR)

MISCELLANEOUS:

Ident. No.	Description
L2.80575.0	CEE-connector 16 A / 230 V 1Ph+PE (assembled when ordered with lamphead)
L2.33835.0	Mains indicator (green diode in cable entry) 230 V for T1, ST1, T2, ST2 (mounted when ordered with luminaire)
L2.82296.0	Dimmer ADM 24, 24 kW / 230 V, with lamp hour counter, XLR-5 pin connector for remote control, pre-heat function, international connector, blue standard housing with handle
L2.36770.0	Lamp cooling adapter for ARRILITE 750 Plus
L2.72927.0	Offset Screwdriver Size 4
L2.30085.0	LoCaster battery pack, rechargeable, NiMH 30 V / 81 Wh
L2.30086.0	LoCaster battery charger, 100 - 240 V~, 50/60 Hz
L2.70825.0	Lighthouse 200, clear glass
L2.70825.S	Lighthouse 200, frosted glass
L2.70860.0	Lighthouse 400, clear glass
L2.70860.S	Lighthouse 400, frosted glass
L2.70865.0	Stirrup for ARRILUX 200/400 lighthouse
L2.70826.0	Shutter for ARRILUX 200 lighthouse
L2.70867.0	Shutter for ARRILUX 400 lighthouse
L2.70845.0	Source Four Adapter Set for ARRILUX 400
L2.73407.0	Head/Ballast Adapter, metal, for ARRILUX 125
L2.73406.0	Adapter for handgrip (micro-yoke), ARRILUX
L2.72937.0	Car power adapter for LoCaster, cigarette lighter (BSS) to XLR 4-pin

This page is intentionally left blank.

ARNOLD & RICHTER CINE TECHNIK GMBH & CO BETRIEBS KG

GENERAL SALE AND DELIVERY TERMS AND CONDITIONS FOR MERCHANTS¹

1. General; Scope

The terms and conditions delineated herein shall be the sole terms and conditions which apply to all of ARRI's current and future business transactions. Unless ARRI has approved of such in writing, any terms or conditions which conflicts with, deviate from or modify the terms and conditions delineated herein shall not be binding on ARRI irrespective of whether ARRI had prior notice of such terms or conditions. ARRI hereby expressly objects to any such conflicting, deviating or modified terms or conditions.

2. Contract Formation

2.1 Any offers made by ARRI shall be without obligation and subject to change without notice provided that the parties have not agreed to a lock-up period.
2.2 The customer is bound to its order for a period of four weeks after its receipt by ARRI. A contract is deemed to exist upon the customer's receipt of ARRI's written confirmation regarding the order or the effective delivery of the applicable goods to the customer pursuant to the terms hereof.
2.3 The scope and type of delivery for an order shall be established solely through ARRI's written confirmation relating to such order. Any errors or omissions in ARRI's sales prospectus, pricelists, offer documents or other related documentation may be amended without ARRI incurring any liability for damages or compensation in relation to such errors or omissions.

3. Payment, Set-Off, Withholding

3.1 The purchase price for the contract shall be that price which is specified by ARRI for such contract and shall apply ex works, exclusive of any value-added tax; if the price is not indicated, the pricelist then in effect shall apply. If the sale has occurred through delivery to a place other than the place of performance (at the customer's request), any costs incurred for packaging, shipping, freight, customs or other related costs will be charged separately. If the customer fails to accept delivery when tendered by ARRI, it must nevertheless make payment.
3.2 In the event that the manufacturing costs for the contracted goods (including, but not limited to, wages, salaries, materials or production costs) rise subsequent to formation of the contract, ARRI shall have the right to increase the purchase price in accordance therewith.
3.3 Invoices from ARRI are due upon ARRI making the goods available to the customer and are payable without deductions within 10 days of the issuance thereof. Upon a default in payment, any overdue amounts will accrue interest at a rate of 8% above the basic interest rate. ARRI reserves its right to assert any further claims regarding damages resulting from a default.
3.4 The customer can offset its payments only if its counterclaim thereto have been judicially sustained or recognized by a declaratory judgment. A right to withholding shall only apply to counterclaims arising specifically from the contract which is the subject of such withholding.

4. Delivery

4.1 The dates for delivery and/or the making available of the goods are not binding unless a date for such has been agreed to in writing by ARRI.
4.2 ARRI is entitled to carry out advance and/or partial deliveries of the goods.
4.3 In the event that ARRI is unable to deliver or make the goods available to the customer due to events of force majeure lasting for a period of three months or more, ARRI's obligation to deliver or make the goods available shall be deemed extinguished in its entirety.
4.4 ARRI shall be entitled to postpone delivery or availability of the goods for the entire duration of the force majeure events.
4.5. Events of force majeure shall be deemed to be any events which are beyond ARRI's control and which make delivery impossible or unreasonably difficult, including, for example, strikes, lawful lockouts, war, import or export prohibitions, scarcity of energy supplies or raw materials, or the delayed delivery to ARRI of goods required for the performance of its obligations hereunder for reasons beyond ARRI's control. If ARRI is released from its obligations as described in Section 4.3 above, the customer shall be entitled to rescind the applicable contract. Compensation for damages for non-performance can be claimed by the customer only if the default in delivery is due to ARRI's gross, negligence or is intentionally caused by ARRI.

5. Transfer of Risk

5.1 The risk of loss or damage to the goods passes to the buyer as soon as ARRI has dispatched the goods from its premises (i.e., plant, factory or warehouse) or upon the surrendering of the goods to the applicable carrier or to the customer itself, as the case may be. The above shall also apply in the event that ARRI serves as the carrier for the goods.
5.2. If the forwarding or collection of the goods is delayed due to reasons attributable to the customer, the risk of loss shall be transferred to the customer upon the readiness of the goods for dispatch.

6. Defective Goods

6.1 The customer must inspect the delivered goods immediately upon its receipt of such. The customer must notify ARRI in writing of any apparent defects within one week of the goods' receipt. ARRI must be notified of hidden defects in writing within two weeks of their emergence but in no event later than one year after delivery of such goods. In the event that the customer fails to meet the aforementioned notification obligations, the goods shall be deemed to have been accepted and the rights set forth in Sections 6.2 and 6.3 below shall not be in effect.

Revision: 13th September 2018

Registered Office: Munich

Trade Register: Municipal Court Munich, HRA 57918

General Partner: Arnold & Richter Cine Technik GmbH & Co. Betriebs KG

Registered Office: Munich

Trade Register: Municipal Court Munich, HRB 54477

Managing Director: Dr. Michael Neuhaeuser, Dr. Jörg Pohlman, Stephan Schenk, Walter Trauninger

Chairman of the Advisory Board: Prof. Dr. Hans Jörg Bullinger

VAT No: DE 129725260

6.2 In the event that the customer has notified ARRI of defects in a timely manner and is thus eligible to make a claim for re-performance, ARRI shall have the right, at its own cost, either to remedy the defect or to redeliver conforming goods.

6.3. If ARRI twice fails to remedy a defect or if ARRI is otherwise unable to accomplish its re-performance obligation or fails to do so within a time period reasonably set forth by the customer, the customer shall be entitled to reduce the purchase price under the contract or to cancel the contract. Instead of seeking performance, the customer can make a claim for damages or for compensation for expenses. However, if the customer elects to rescind the contract it shall have no right to make any claim for damages with respect to the defective goods.

6.4 Provided that ARRI has not acted fraudulently, any claims of the customer regarding the goods shall become void and unenforceable one year after delivery of the applicable goods.

6.5 The prescription period of one year in Section 6.4 above shall be replaced by a prescription period of two years for goods from the product range „Light“ of ARRI that are distributed under the brand „ARRI“.

7. Liability

7.1 ARRI shall be liable for any damage hereunder caused by it intentionally or caused by its gross negligence.

7.2 In the event of simple negligence by ARRI, ARRI shall be liable only for ordinary and foreseeable damage arising from the contract, and only to the extent that ARRI has breached material contractual obligations. Further, in the event of simple negligence by ARRI, ARRI shall be liable for personal injury and/or health-related damage attributable to ARRI.

7.3 ARRI shall not be liable for consequential damages and unforeseen damages (including consequential damages resulting from defective goods) as well as loss of profits in the event it has acted with simple negligence.

7.4 ARRI shall be subject to no liability beyond that which is delineated in this Section 7.

7.5 To the extent that ARRI's liability is excluded or limited, such exclusion or limitation shall apply to any persons or entities employed by ARRI in the performance of its contractual obligations.

7.6 The limitations of liability delineated herein shall not apply to any legally prescribed strict liability, in particular any such strict liability arising from laws regarding guarantees or product warranties.

8. Retention of Title

8.1 Ownership of the delivered goods shall remain with ARRI until it has received full payment for such goods. Title to the goods shall first pass to the customer upon ARRI's receipt of all payments which are due under the current applicable contract.

8.2 Prior to obtaining title to the goods, the customer is not entitled to pledge, to assign by way of security, to process or to alter the goods. The customer is, however, authorized to sell the goods to third parties in the ordinary course of business unless a non-assignability agreement regarding the consideration exists between the customer and the third party. If a third party acquires an interest in the goods through a resale to such party, the customer agrees to assign to ARRI all of its correlating rights and claims against such third party. ARRI hereby accepts such assignment.

8.3 Any combination, amalgamation and/or processing of the goods (sections 947, 948 and 950 BGB [German Civil Code]) shall be deemed to have been made on behalf of ARRI. ARRI shall acquire title to the resulting product in the ratio of the invoiced value of the goods and services provided by ARRI to the total invoiced value of the resulting product. If the goods have been resold to a third party, the assignment of rights and claims performed in accordance with Section 8.2 above shall be valid solely up to the amount of the invoiced value of goods and services provided by ARRI.

8.4 Upon a default in payment by the customer, ARRI has the right to disclose to any applicable third party that it holds an interest in the goods pursuant to the assignment delineated above and to assert any of its claims directly. The customer is obligated to provide and deliver to ARRI all documentation required for the assertion of such claims. The customer must also make available to ARRI, completely and in a timely fashion, all information about any events that might affect the obligations described above.

9. Jurisdiction; Governing Law

9.1. The parties hereto agree that the exclusive jurisdiction for any transaction and/or contract between the parties is Munich, Germany.

9.2. The relationship of the parties hereto shall be exclusively governed by and in all respects construed in accordance with the laws of the Federal Republic of Germany with no application whatsoever of the United Nations sales law.

¹ Kaufleute as defined in the HGB [German Commercial Code]

ARRI SALES DEPARTMENTS

EMEA (Europe, Middle East, Africa, India)

Arnold & Richter Cine Technik GmbH & Co. Betriebs KG
(Sales & Service)
Ernst-Augustin Strasse 12,
12489 Berlin, Germany
Phone: +49 30 678 233 0
Fax: +49 30 678 233 99
E-Mail: emeai-lighting@arri.de

ARRI CT France Sarl
(Sales)
54, Rue René Boulanger
75010 Paris, France
Phone: +33 1 42 41 29 95
E-Mail: france@arri.de

ARRI Italia S.r.l.
Via Achille Grandi, 50
20017 Rho (Milan), Italy
Phone: +39 2 262 271 75
Fax: +39 2 242 1692
E-Mail: info@arri.it

ARRI Middle East DMCC
(Sales)
JBC3, Office No. 2405
P.O. BOX NO 336550
Jumeirah Lake Towers
Dubai, United Arab Emirates
Phone: +9714 4229957
Fax: +9714 4397001
E-Mail: info@arrime.com

AMERICAS

ARRI Brasil Ltda.
Avenida Ibirapuera, 2907 – Cj. 421
Indianópolis
04029-200 São Paulo - SP, Brazil
Phone: +55 11 5041-9450
E-Mail: arribrasil@arri.com

ARRI Inc. / West Coast & Mexico
(Sales & Service)
600 North Victory Blvd.,
Burbank, CA 91502-1639, United States
Phone: +1 818 841 7070
Fax: +1 818 848 4028
E-Mail: info@arri.com

ARRI Inc. / East Coast

(Sales & Service)
617 Route 303
Blauvelt, NY 10913-1109, United States
Phone: +1 845 353 1400
Fax: +1 845 425 1250
E-Mail: info@arri.com

ARRI Inc. / Latin America

(Sales)
888 E. Las Olas Blvd.
Suite 702
Fort Lauderdale FL 33301, United States
Phone: +1 954 666 6045
Fax: +1 954 322 4188
E-Mail: ventas@arri.com

ARRI Inc. / Canada

(Sales)
1200 Aerowood Drive, Unit 29
Mississauga, ON L4W 2S7, Canada
Phone: +416 25 53 335
Fax: +416 25 53 399
E-Mail: info@arri.com

ASIA

ARRI ASIA Limited
(Sales & Service)
41/F One Kowloon,
1 Wang Yuen Street
Kowloon Bay
Hong Kong,
Phone: +852 2571 6288
Fax: +852 2875 9181
E-Mail: info@arriasia.hk

ARRI China (Beijing) Co. Ltd.

(Sales & Service)
Chaowai SOHO Tower C, 6/F, 0628/0656
Chaowai Dajie Yi 6
Beijing, China
Phone: +86 10 5900 9680
Fax: +86 10 5900 9679
E-Mail: store@arri.cn

AUSTRALIA / NEW ZEALAND

ARRI Australia Pty Ltd
(Sales & Service)
Level 1, Unit 1, 706 Mowbray Road
Lane Cove NSW 2066
Sydney, Australia
Phone: +61 2 9855 4300
Fax: +61 2 9855 4301
E-Mail: info@arri.com.au



www.arri.com