


Fig. 1 table 1.

Klem capaciteiten zie volgende pagina

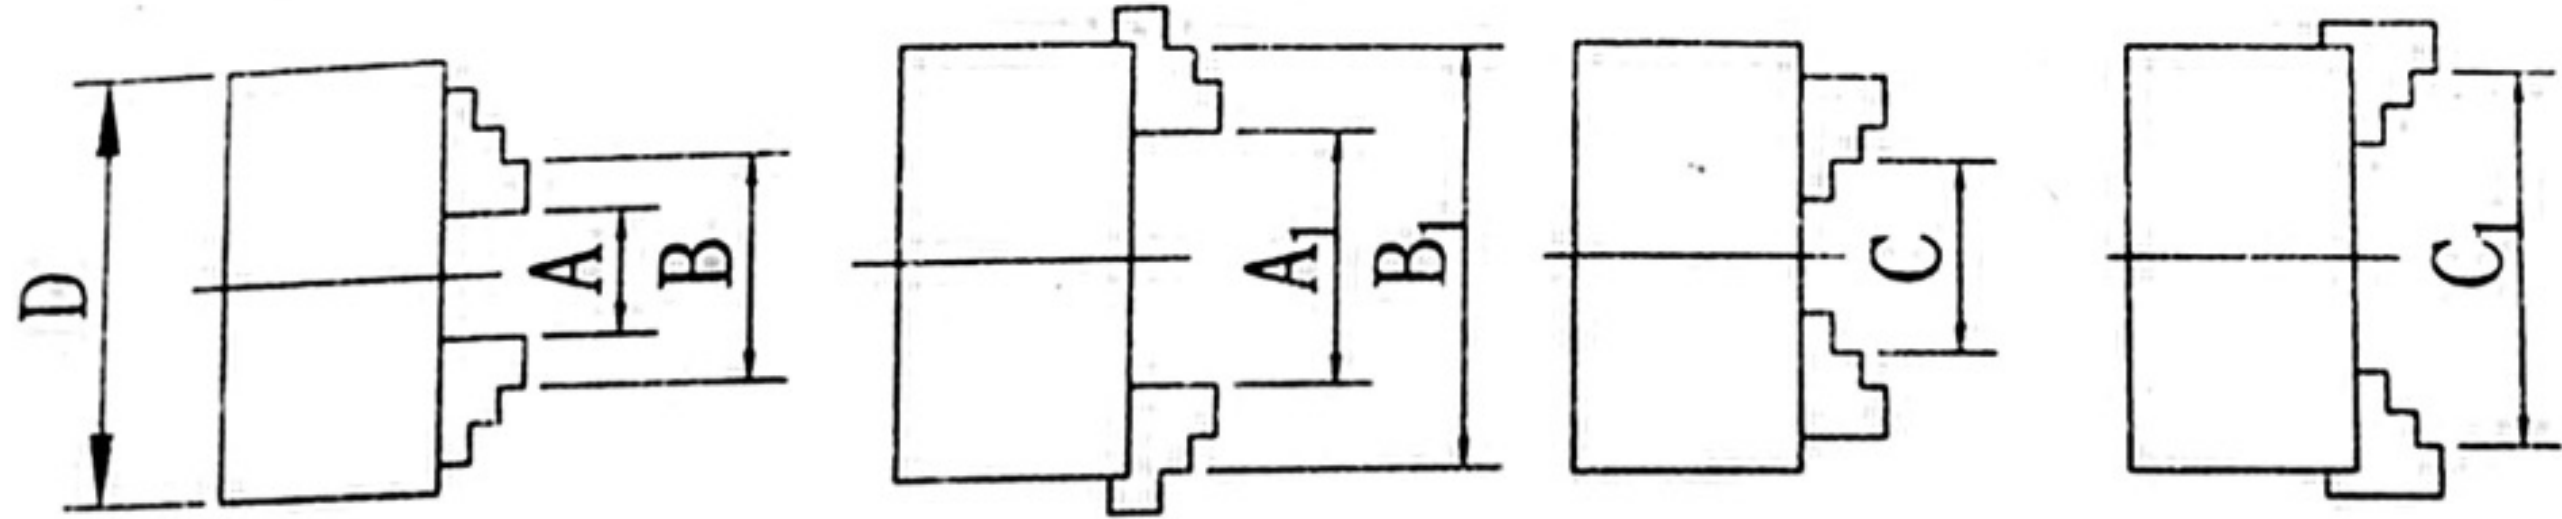

Size D	夹紧范围	撑紧范围	夹紧范围
	Clamping range	Jamming range	Clamping range
	A-A ₁	B-B ₁	C-C ₁
80	2-22	25-70	22-63
100	2-30	30-90	30-80
125	2.5-40	38-125	38-110
130	3-40	40-130	40-120
160	3-55	50-160	55-145
165	4-60	52-165	55-150
190	4-70	65-190	65-190
200	4-85	65-200	65-200
240	6-100	80-240	90-240
250	6-110	80-250	90-250
315	10-140	95-315	100-315
320	10-140	95-320	100-320
325	10-140	95-325	100-325
380	15-210	120-380	120-380
400	15-210	120-400	120-400
500	25-280	150-500	150-500
630	50-350	170-630	170-630
800	150-450	300-800	300-800

Afmetingen

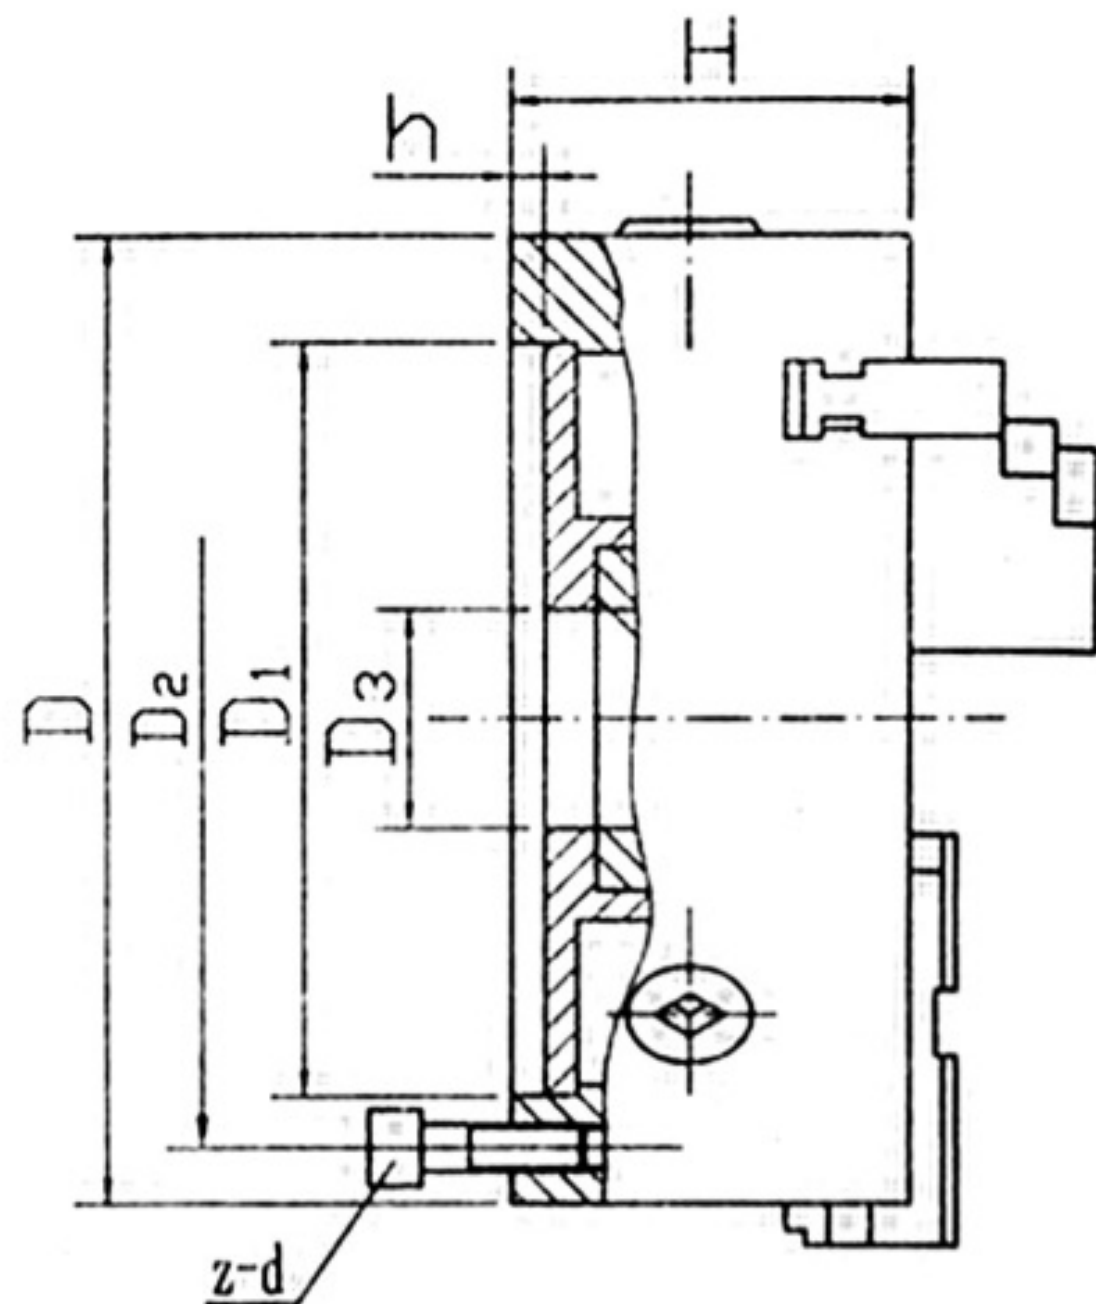
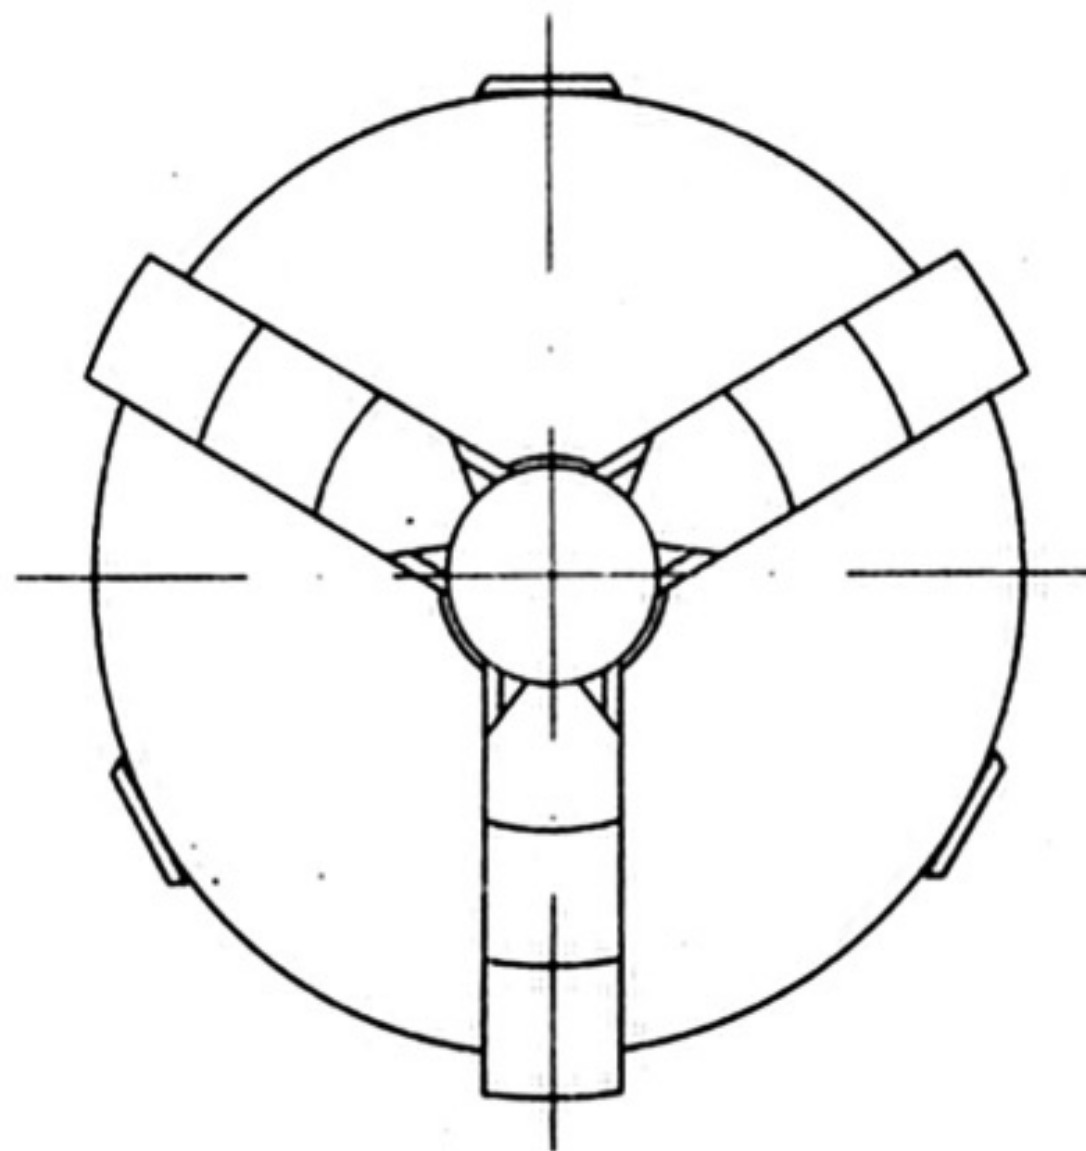



图 9 (F: 9)

Afmetingen


规格 D Size	D1	D2	D3	H	h	z-d
80	55	66	16	50	3.5	3-M6
100	72	84	22	55	3.5	3-M8
125	95	108	30	58	4	3-M8
130	100	115	30	60	4	3-M8
160	130	142	40	65	5	3-M8
160A	130	142	40	65	5	3-M8
165	130	145	40	65	5	3-M8
190	155	172	55	75	5	3-M10
200	165	180	65	75	5	3-M10
200A	165	180	65	75	5	3-M10
240	195	215	70	80	8	3-M12
240A	195	215	70	80	8	3-M12
250	206	226	80	80	5	3-M12
250A	206	226	80	80	5	3-M12
315	260	285	100	90	6	3-M16
315A	260	285	100	90	6	3-M16
320	270	290	100	90	6	3-M16
320A	270	290	100	90	6	3-M16
325	272	296	100	90	6	3-M16
325A	272	296	100	90	6	3-M16
380	325	350	130	100	6	3-M16
380A	325	350	130	100	6	3-M16
400	340	368	130	100	6	3-M16
400A	340	368	130	100	6	3-M16
500A	440	465	200	115	6	6-M16
630A	560	595	260	130	7	6-M16
800A	710	760	385	148	8	6-M20
1000A	910	950	460	165	8	6-M24
1250A	910	950	500	180	10	6-M24

Size D	Max. input torque N. m	Max klemkracht KN		Max Toerental r/min	
		IRON CASTING BODY	STEEL BODY	铸铁盘体 IRON CASTING BODY	
80	40	10		4000	
100	60	10		3500	
125	100	17		3000	
130	100	17		3000	
160	160	24		2500	
165	160	24		2500	
190	250	31		2000	
200	250	31		2000	
240	320	37		1600	
250	320	37		1600	
315	400	46		1200	
320	400	46		1200	
325	400	46		1200	
380	500	55		1000	
400	500	55		1000	
500	630	65		800	
630	800	72		600	
800	900	80		500	

Constructional dimensions for TOP JAW

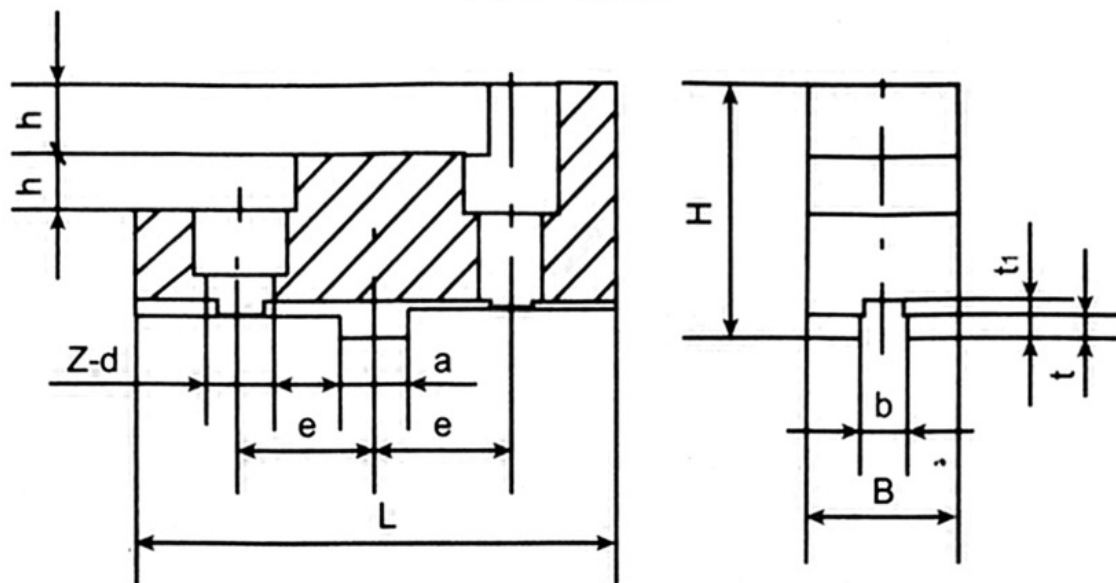

size	160	190	200	240	250	315~325	380	400	500	630	800
L	68	80		96		116	127		130		210
B	25	30		36		42	45		50		73
H	41	45		51		62	68		86		89
h	9	10.5		12.5		17			20		22
a	12.675			19.025							
b	7.94			12.7							
e	19	22.2		27		31.75	38.1				
t	3						6				
t1	4										5
Z-d	2-Φ11			2-Φ13			2-Φ18		2-Φ22		4-Φ22

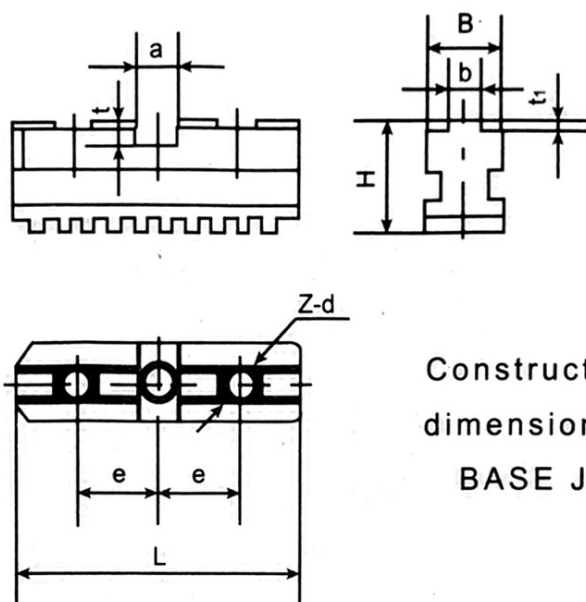

Constructional
dimensions for
BASE JAW

size	160	190	200	240	250	315~325	380	400	500	630	800
L	64	80		95		113	127		165	195	286
B	20	22		27		36			46	50	60
H	33	35		37		43	46		55	57	65
a	12.675			19.025							
b	7.94			12.7							
e	19	22.2		27		31.75	38.1				
t	4						7				
t1	3										
Z-d	2-M10			2-M12			2-M16		4-M20	5-M20	7-M20