
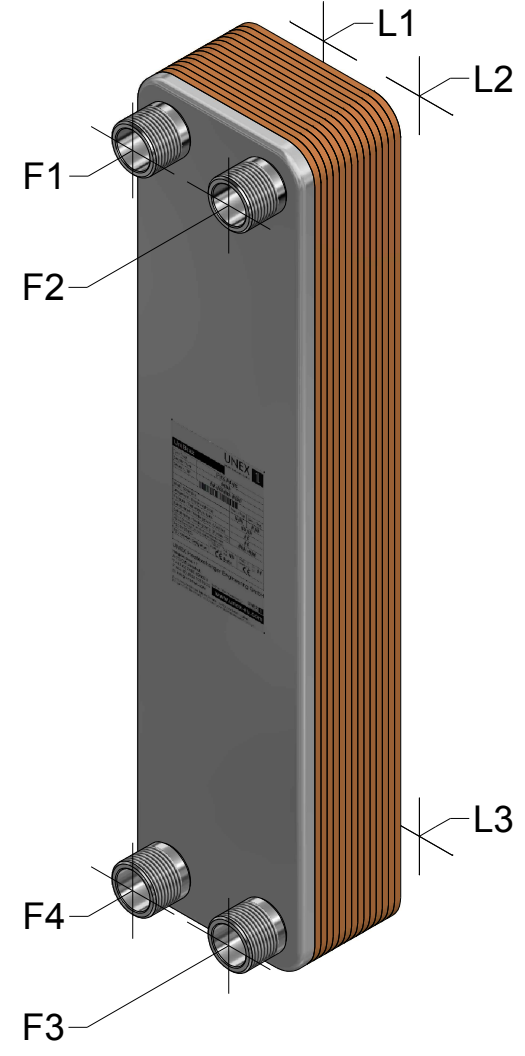
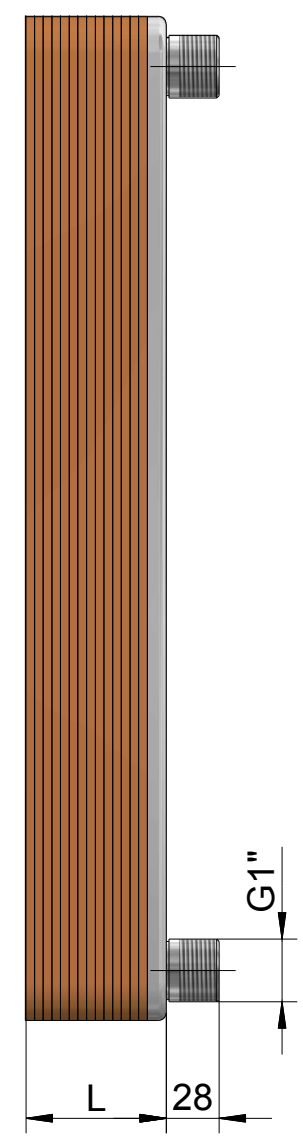


Side 1 Side 2

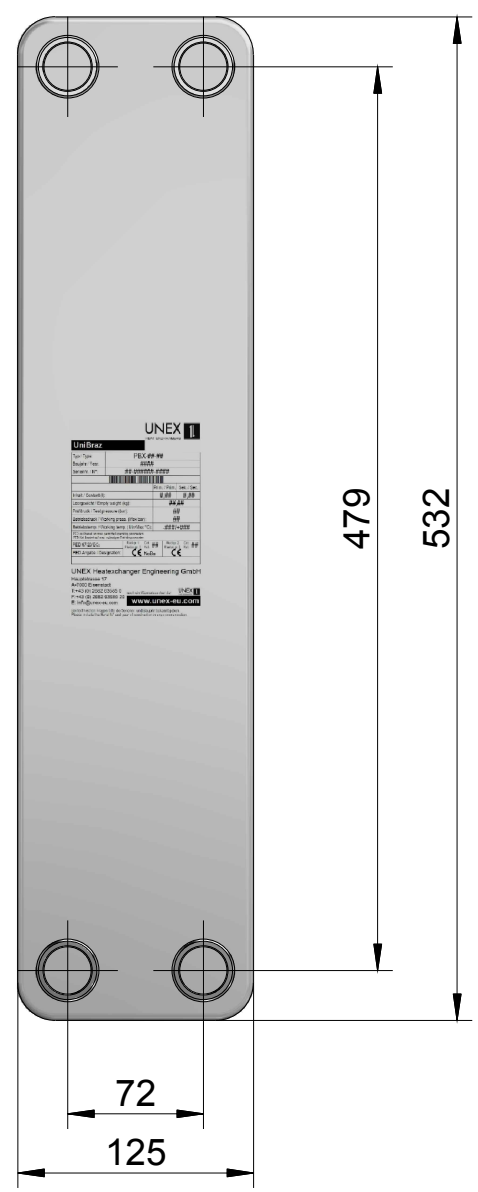

Exchanger connection options	
<b>Standard</b>	G 1" - 28mm long
<b>Alternative</b>	G 5/4", HEX, Solder
<b>Other</b>	On request
<b>Additional</b>	On rear positions L1 to L4
<b>Studs &amp; Bolts</b>	On request

Insulation options	Example picture
<b>Aluminium coated PU foam</b> Heating applications to +150°C (Peak)	
<b>Self-adhesive rubberised</b> Cooling applications -50 to +105°C	
<b>Easy-fit shell</b> Heating applications to +135°C	
<b>PROTEX pre-insulated</b> Heating & cooling applications -50 to +150°C (Peak)	

Mounting options	Example picture
<b>Wall Connection Set</b> Simple, compact & professional mount using the exchanger connections	
<b>Angled Wall Bracket</b> "L" bracket including strap & screws	

Detachable pipe connection options	Example picture
<b>VER 20</b> From G1" to DN20 weld (2 pcs/set)	
<b>VER 22</b> From G1" to 22 mm solder (2 pcs/set)	
<b>VER 3/4</b> From G1" to 3/4" thread (2 pcs/set)	
<b>VEROR1</b> From G1" to 1" thread - reduction-free (2 pcs/set)	

Amount of plates	10	14	20	24	30	34	40	44	50	60	70	80	90	100	110	120	130	140	150	
Volume Side 1 (l)*	0.44	0.66	0.99	1.21	1.54	1.76	2.09	2.31	2.64	3.19	3.74	4.29	4.84	5.39	5.94	6.49	7.04	7.59	8.14	
Volume Side 2 (l)*	0.55	0.77	1.10	1.32	1.65	1.87	2.20	2.42	2.75	3.30	3.85	4.40	4.95	5.50	6.05	6.60	7.15	7.70	8.25	
Max working pressure (bar)	30										24									
Min / Max temperature (°C)	-195 / +195																			
PED Class Group 1 (Category)																				
PED Class Group 2 (Category)	SEP										I									
Plate packet depth L(mm)*	32.0	41.2	55.0	64.2	78.0	87.2	101.0	110.2	124.0	147.0	170.0	193.0	216.0	239.0	262.0	285.0	308.0	331.0	354.0	
Net Weight Empty (kg)	4.62	5.37	6.49	7.24	8.36	9.11	10.23	10.98	12.10	13.97	15.84	17.71	19.58	21.45	23.32	25.19	27.06	28.93	30.80	
Heat Transfer Area (m²)	0.52	0.78	1.17	1.43	1.82	2.08	2.47	2.73	3.12	3.77	4.42	5.07	5.72	6.37	7.02	7.67	8.32	8.97	9.62	

**Where appropriate the following European standards and regulations were used during design and construction:**

97/23/EC (Pressure Equipment Directive)  
 EN 1148 (Water to water heat exchangers for district heating)  
 EN 10272 (Stainless steel bars used for pressure purposes)  
 EN 10028-7 (Stainless steel flat products used for pressure purposes)  
 EN 13445 (Unfired Pressure Vessels )  
 ISO 2768-m (General tolerances class "m")  
 ISO 228-1 ("G" Thread BSP parallel)

Please ask your sales partner if you require other standards or certification to be applied.

©2014 Errors, Omissions and Technical Alterations excepted  
 Connections : 1.4301 (304) / Plates : 1.4404 (316L) / Braze : Cu 99.9%  
 Sizes in mm unless otherwise shown

	UNEX Heatexchanger Engineering GmbH Hauptstrasse 17 A-7000 Eisenstadt Austria	www.unex-eu.com info@unex-eu.com Tel: + 43 (0) 2682 635 85 0 Fax: + 43 (0) 2682 635 85 20	<b>Scale</b> <b>M 1:4 (A3)</b>											
	<table border="1"> <thead> <tr> <th>Status</th> <th>Change</th> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>Drawn by</td> <td></td> <td>12.08.2014</td> <td>AWU</td> </tr> <tr> <td>Checked by</td> <td></td> <td>09.10.2014</td> <td>DRO</td> </tr> </tbody> </table>			Status	Change	Date	Name	Drawn by		12.08.2014	AWU	Checked by		09.10.2014
Status	Change	Date	Name											
Drawn by		12.08.2014	AWU											
Checked by		09.10.2014	DRO											