INSTALLATION MANUAL Q13455 - MILO GYPSUM SQUARE








100-240V | GU10 | IP20 | GYPSUM | MAX. 35W

Installation Instructions

- Disconnect the electricity before installation
- Cut the hole (10.3 x 10.3 cm)
- Adjust the height of the mounting bracket according to the ceiling thickness (figure 1) TIP: make sure to have 3-4mm plaster height for smooth finish
- Connect the GU10 lampholders (figure 2)
- Put the gypsum fitting into the ceiling hole and fix using screws (figure 3)
- Finish with plaster and paint (figure 4)
- Insert GU10 lamps (figure 5)
- Switch on the main electricity

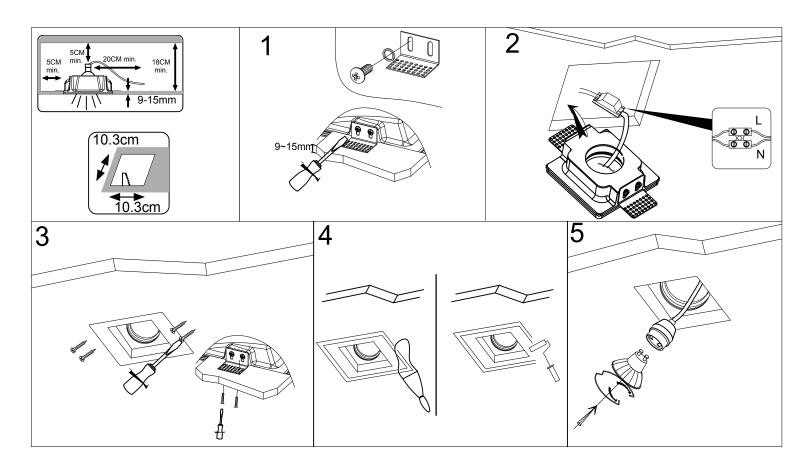

Warnings:

- 1. Disconnect the electricity before installation
- 2. Make sure that the product is installed properly before connecting to electricity
- 3. Do not cover the fitting
- 4. Maintenance and installation should only be carried out by a professional electrician



DMQ MILO SQUARE LOW DEPTH Q13455