

Video-intercoms / Outdoors Station


# SF-VI112-IPW-1MF

## Outdoor station

### Villa Outdoor Station

Villa video intercoms have a functional and robust design, equipped for all types of installations thanks to their IP or 2-wire communication modes. Complete visualization of the entire environment. Complete functionalities through the mobile application that allow remote opening, real-time viewing and notifications. The double relay output allows to control the main door, as well as a secondary one or the activation of a garage door. In addition, it allows a conventional 12V lock release to be powered from the panel itself

- Videointercom IP
- Communication Standard PoE, WiFi,
- Identification MF Card Reader
- Bidirectional Audio
- 2 relay for doors
- 2 Mpx Camera
- Mobile App
- Outdoor Installation & Antivandal

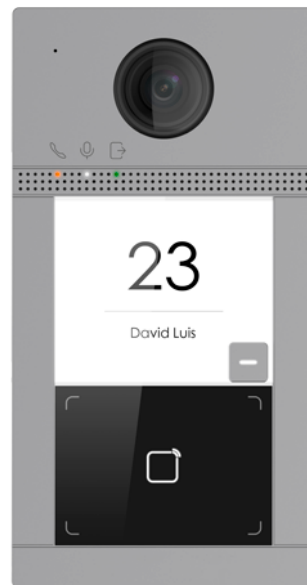

## Technical Specification

<b>Supplement light</b>	IR supplement
<b>Lens</b>	1
<b>FOV</b>	Horizontal: 129° Vertical: 75°
<b>Pixel</b>	Main stream : 1920 × 1080 Sub stream : 720 × 480
<b>Audio quality</b>	Noise suppression and echo cancellation
<b>Communication protocol</b>	TCP/IP, RSTP, WiFi
<b>Wired network</b>	10/100 Mbps self-adaptive Ethernet
<b>Wi-Fi</b>	Yes
<b>Card Reader</b>	MF Card 13.56MHz
<b>Network interface</b>	1
<b>Exit button</b>	2
<b>Lock control</b>	2
<b>Door contact input</b>	2
<b>Power interface</b>	1
<b>Button</b>	1 buttons
<b>Installation</b>	Surface mounting
<b>Indicator</b>	3
<b>Weight</b>	385g
<b>Protective level</b>	IP65, IK08
<b>Power supply method</b>	IEEE802.3af, standard PoE 12 VDC
<b>Working temperature</b>	-40° C to +55° C (-40° F to 131° F)
<b>Working humidity</b>	10% to 95%
<b>Dimensions</b>	174 mm × 91 mm × 29 mm
<b>Application environment</b>	Outdoor
<b>Power consumption</b>	≈ 10 W
<b>Platform</b>	Safire Connect & Safire Control Center