

**Product Datasheet model uvex super OTG 9169 586**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**


- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – extremely scratch-resistant lens on both sides
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- detectable

**2. Technical Details Body****Front piece**

|          |        |
|----------|--------|
| Material | PC+PBT |
| Colour   | black  |

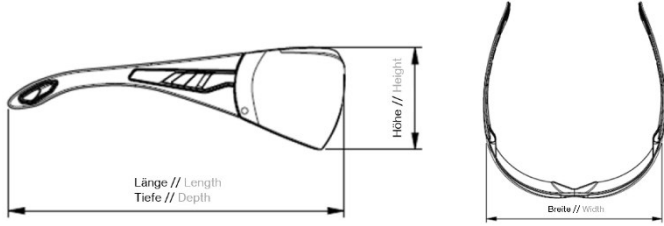



|   |                      |
|---|----------------------|
| <b>Rivet</b>  |                      |
| Material  | brass, nickel-plated |
| <b>Temple</b>   |                      |
| Material  | PC+PBT/TPE           |
| Colour  | black, clear         |
| <b>Marking</b>  |                      |
| Manufacturer 's ID code                                       | W                    |
| Applicable EN norm  | 166                  |
| Impact resistance   | F (45 m/s)           |
| Resistance to high speed particles at extremes of temperature | T                    |
| Conformity symbol   | CE                   |

### 3. Technical Details Lens

|   |   |
|---|---|
| Material  | PC  |
| Thickness   | 2.1 mm at PD  |
| Coating   | uvex supravision sapphire   |
| Colour  | grey 23%  |
| UV protection   | UV400   |
| <b>Marking according to EN</b>                                |   |
| Filter  | 5-2.5 (EN 172)  |
| Manufacturer 's ID code                                       | W   |
| Optical class   | 1   |
| Impact resistance   | F (45 m/s)  |
| Resistance to high speed particles at extremes of temperature | T   |
| Scratch resistance  | K   |
| Conformity symbol   | CE  |
| Factory symbol  |  |

## 4. Logistical Information

### Product

|   |  |   |  |
|---|--|---|--|
| Weight  | 39g  |   |  |
| Dimensions<br>(L x W x B)<br>in approx.<br>mm |  <p style="text-align: right;">picture only for reference</p>  |   |  |
|   | 161 x 157 x 58   |   |  |
|   | <b>Packing unit 1</b>  | <b>Packing unit 2</b>   | <b>Packing unit 3</b>  |
| EAN Code                                      | 4031101512419  |   |  |
| Quantity in pcs.                              | 1  | 8   | 160  |
| Dimensions<br>(L x W x H)<br>in approx.<br>mm |  <p style="text-align: center;">picture only for reference</p> |  |  |
|   | 76 x 160 x 58  | 185 x 290 x 97  | 600 x 400 x 400  |
| Net weight in approx. g                       | 39   | 312   | 4,992  |
| Gross weight in approx. g                     | 53   | 530   | 9,380  |
| Country of Origin                             | Germany  |   |  |

## 5. Miscellaneous

|              |                 |
|--------------|-----------------|
| Standards    | EN 166 + EN 172 |
| PPE Category | Category II     |