

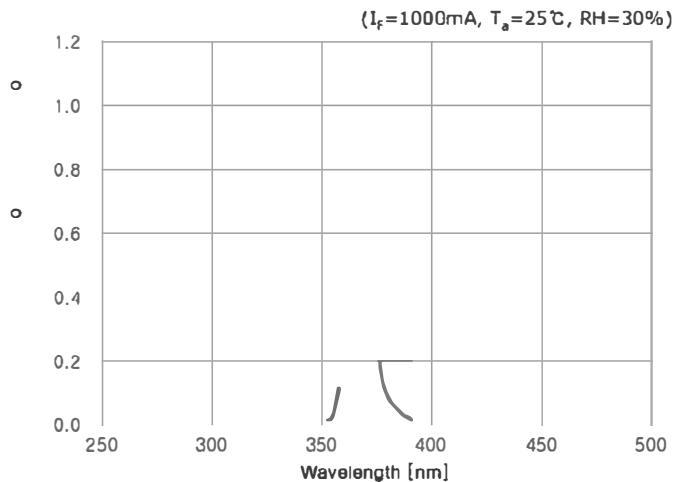


AJR UV-LED 10000P+EU hand held rechargeable UV LED lamp



- Power energy – energy saving of only 9VA
- The average service life of the light source 30000h!
- The content of UV-B is 0.
- 3-4 hours of battery life.
- Quick replacement battery
- Including the weight of the battery less than 500 g.
- External without wiring
- Quartz and optical glass module, non PMMA material, excellent weather resistance.
- Continuous working outside surface temperature $< 5K (5^{\circ}C)$

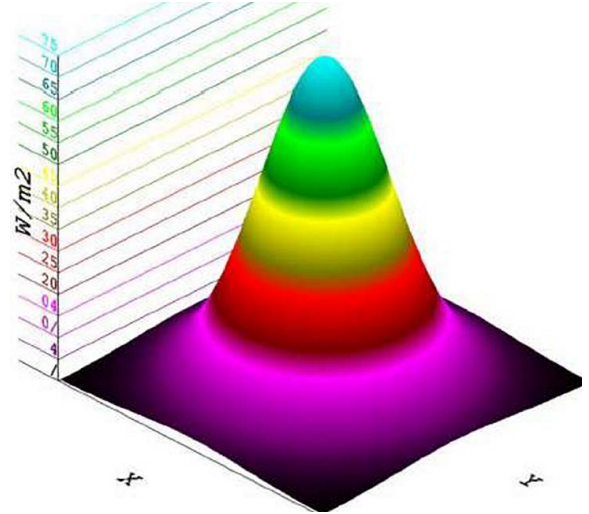

UV irradiation distribution map (380mm)

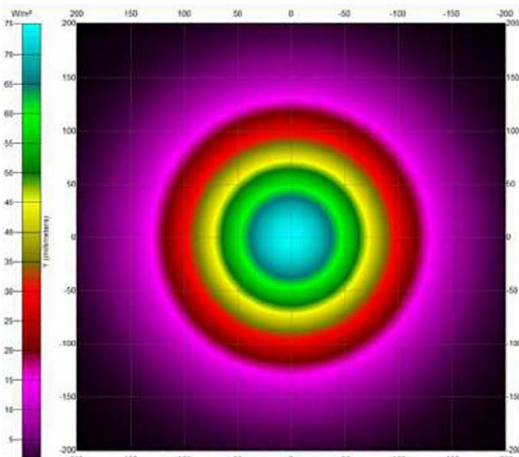

Dimension:
mm

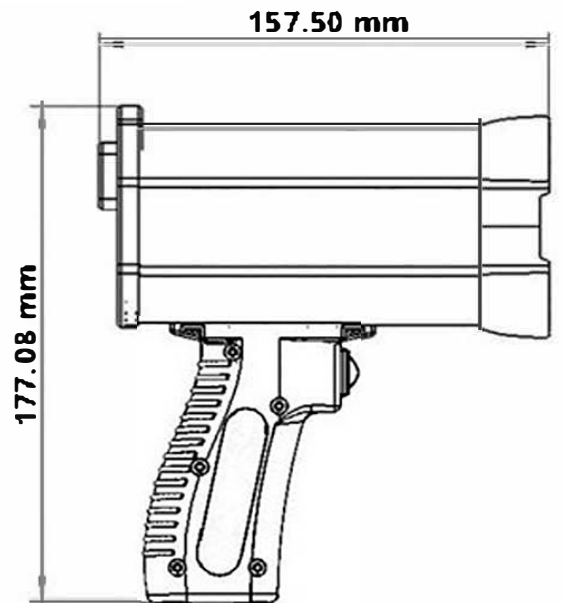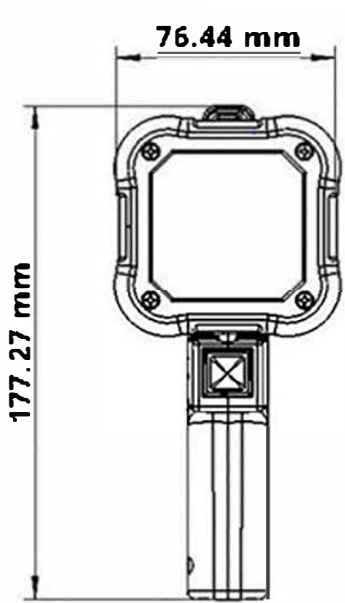

Parameters

Project	Parameter
Form	Handheld type
UV(Light)-FLUX Room temperature 25°C 380mm calibration	UV-LED10000+: > 10000uW/cm²
Effective coverage area 380mm calibration	Diameter of about 200mm
Wavelength	Room temperature 25°C 365nm±3nm (UVA)
FLUX Error	0-40°C ±10%
Light distribution characteristic	The light distribution center
Power source	AC100-240V 50/60Hz
Power	UV LED-9VA
Overall dimensions	137mm (W) *72mm (D) *176mm (H)
Weight	498g
The charging time	3-4H
Battery capacity	2200mA/H 12.6V
Battery life (total time)	UV LED 3-4H

Note: The above parameters are typical value. Parameters are subject to change without prior notice!