








AGM Deep Cycle Cyclic Battery

Discover[®] VRLA AGM Deep Cycle batteries deliver deep-cycle and cyclic discharging for a general range of stationary applications such as backup power, solar, and renewable energy storage. The batteries are maintenance-free, safe, easy to use and a start to reducing energy cost and grid dependence.

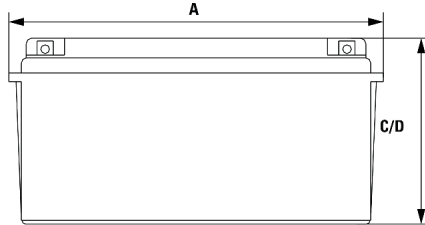

TERMINAL

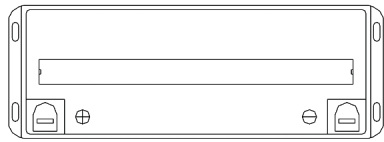

LAYOUT

MECHANICAL SPECIFICATIONS

Length A (in/mm)	19	482
Width B (in/mm)	6.7	170
Height C (in/mm)	9.5	242
Total Height D (in/mm)	9.5	242
Weight (lbs/kgs)	95	43
Terminal *	F12M8	
Technology	AGM, VRLA	

NOTE 1: Dimensions have a ±2 mm (0.08 in) tolerance. Weights may vary.
NOTE 2: Refer to [terminal guide](#) on website for torque values.

ELECTRICAL SPECIFICATIONS

Voltage (V)	12
Charge Temperature	Min: -10°C (14°F) Max: 50°C (122°F)
Discharge Temperature	Min: -40°C (-40°F) Max: 50°C (122°F)

CAUTION: Extra considerations must be given to depths of discharge, operating voltages and currents when designing systems for use at maximum operating temperatures.

PERFORMANCE SPECIFICATIONS

Amp Hours (AH)			
1 HR	5 HR	10 HR	20 HR
100	130	150	156

15MIN @ 1.67VPC; 1HR @ 1.60VPC, 5HR @ 1.75VPC; 10 HR @ 1.80VPC; 20 HR @ 1.80VPC. All at 30°C/86°F

Discharge Constant Current (Amperes) @ 25°C / 77°F									
VPC/Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 VPC	445.00	347.00	282.00	163.00	97.00	40.10	28.10	15.50	7.93
1.65 VPC	415.00	327.00	267.00	158.00	95.00	39.40	27.60	15.40	7.90
1.70 VPC	384.00	306.00	253.00	153.00	93.00	38.50	27.10	15.30	7.90
1.75 VPC	352.00	286.00	239.00	147.00	91.00	38.00	26.60	15.20	7.85
1.80 VPC	317.00	263.00	226.00	144.00	89.00	37.40	26.00	15.00	7.80

Discharge Constant Power (Watts) @ 25°C / 77°F									
VPC/Time	5 MIN	10 MIN	15 MIN	30 MIN	45 MIN	1 HR	2 HR	3 HR	5 HR
1.60 VPC	785.00	609.00	501.00	325.00	221.00	201.00	112.00	78.00	53.50
1.65 VPC	734.00	579.00	483.00	315.00	216.00	198.00	110.00	77.10	53.20
1.70 VPC	686.00	548.00	465.00	306.00	211.00	195.00	108.00	76.20	52.80
1.75 VPC	638.00	519.00	446.00	296.00	206.00	190.00	106.00	75.30	52.50
1.80 VPC	591.00	487.00	425.00	286.00	202.00	184.00	105.00	74.00	52.00

BENEFITS

ENHANCED RUNTIME

- High energy density
- Consistent voltage performance

EXTENDED SERVICE LIFE

- Low self-discharge rates prolongs shelf life
- 99% gas recombination extends life
- Long life superior to general purpose batteries

EXTREME TEMPERATURES

- Wide ambient operating temperature
- Low temperature operation superior to FLA / Gel batteries

RELIABLE AND SAFE

- Valve Regulated Lead-Acid, AGM
- Maintenance-free, nonspillable, no-gassing
- Flame retardant (UL94:V0) ABS case and cover available

CERTIFIED QUALITY

Discover[®] manufacturing facilities are fully certified to ISO 9001/14001 and OSHA 18001 standards.

Designed in accordance with and published in compliance with applicable standards, including:


- IEC 60896-21/22
- BS EN 60254-1:2005
- UL, CE Health Safety Certified

SHIPPING CLASSIFICATION


- Classified as a nonspillable battery
- Without restriction for transport by Sea (IMDG amendment 27)
- Without restriction for transport by Air (IATA/ICAO provision 67)
- Without restriction for transport by Ground (STB, DOT-CFR-HMR49)




Cycle Life Characteristics

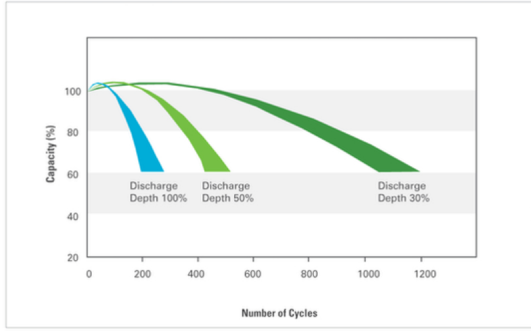


Temperature Effects on Capacity

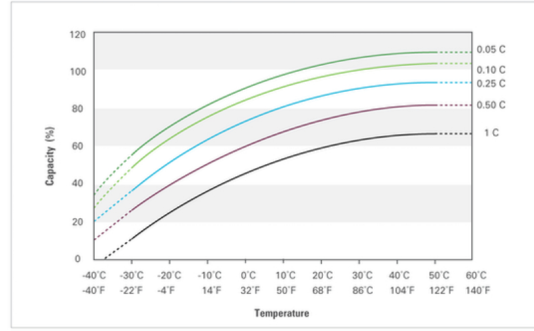

Charge Characteristics

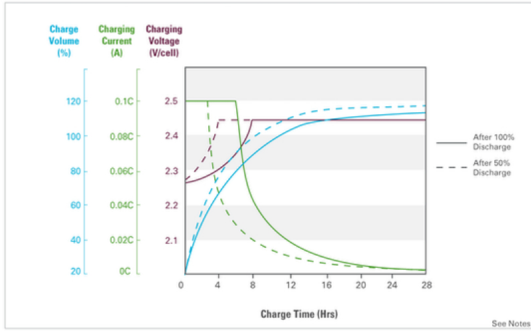

Discharge Characteristics

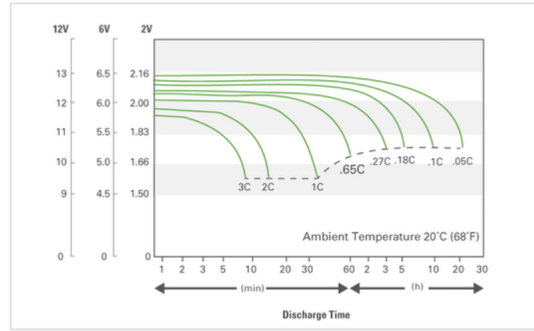

Self-Discharge Characteristics

