

# CALLING ALL POWER PLANT PROFESSIONALS



BSL-50 (OPTIONAL)

BFP-3515D-R2

## BFP-3510 Big Shot® - 10 HP Beast!

If you're ready for the ultimate surface condenser tube cleaning system, step up to the Big Shot®. You want power? How about 10 HP! You want efficiency? How about a two-gun pump for one or two-person operation!\* The maximum power of the Big Shot and the descaling effectiveness of our projectiles combine to make this a complete and effective system for even the toughest deposits. Just choose the right projectile for your application and let the cleaning power of the Big Shot's pressurized water do the rest. \*Alternating projectile shots.

**BFP-3510-230-R1:** Big Shot Tube Cleaning System, including hoses with one reel, and cart.


**BFP-3510-230-R2:** Big Shot Tube Cleaning System, including hoses with two reels, and cart.

**BFP-3515D-R1:** Diesel Powered Big Shot Tube Cleaning System, including hoses with one reel, and cart.

**BFP-3515D-R2:** Diesel Powered Big Shot Tube Cleaning System, including hoses with two reels, and cart.

**Call for Customization Options and Prices**

Visit [www.goodwaybenelux.com](http://www.goodwaybenelux.com) or call for shafts and accessories.

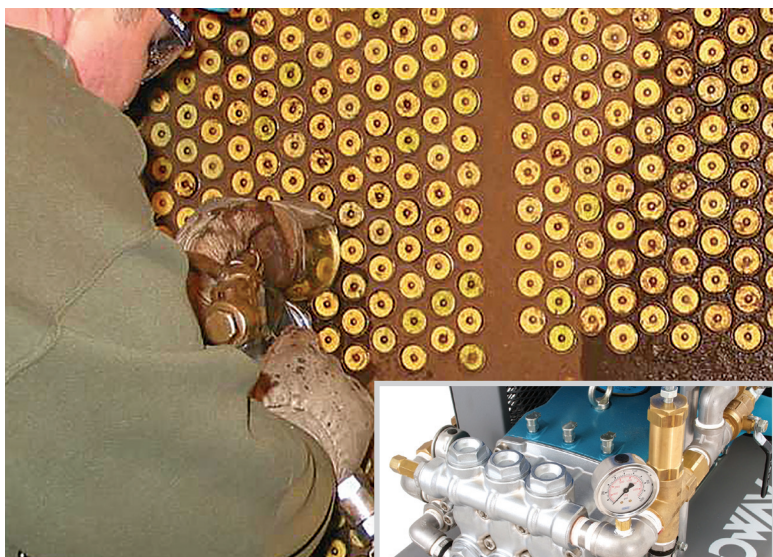

**NOW  
AVAILABLE IN  
DIESEL POWER!**

### FEATURES

- Single gun features continuous shot action
- Two gun version features rapid, alternating shot action
- Hose Reel(s)
- Rugged construction
- Up to 400 PSI
- Large pneumatic tires
- Heavy-duty cart

### DIESEL MODEL FEATURES

- Electric start (ONLY DIESEL)
- On-Board air compressor to power BSL guns (ONLY DIESEL)
- Large semi-pneumatic tires (ONLY DIESEL)
- 7 hour approximate run time (ONLY DIESEL)
- Diesel Tier 4 EPA Compliant (ONLY DIESEL)

### SPECIFICATIONS

SPECIFICATIONS	BFP-3510	BFP-3515D
Motor Power	10 HP	15 HP
Input Power	Standard: 26 amps, 230V, 50/60 Hz AC, three phase Optional: 13 amps, 460V, 50/60 Hz, three phase; or 12 amps, 380V, 50/60 Hz, three phase	Diesel powered engine
Power Supply Cord	25', 12-4	N/A
Water Requirements	20-70 PSI at 35 GPM	0-100 PSI at 35 GPM
Output Water Pressure	275-400 PSI at 35 GPM	Up to 400 PSI at 35 GPM
Hoses	1 1/2" x 50' inlet and 3/4" x 50' outlet	1 1/2" x 50' inlet and 3/4" x 50' outlet
Pump	Triple plunger running in oil bath	Triple plunger running in oil bath
Dimensions	40" high x 32" wide x 60" deep	55" high x 30" wide x 84" length
Weight	600 lbs net dry	900 lbs net dry

**Direct contact**

+31 (0)183 216 170 or [info@goodwaybenelux.nl](mailto:info@goodwaybenelux.nl)



[goodwaybenelux.nl](http://goodwaybenelux.nl)

Office / Distribution Center

Leemansstraat 15, 4251 LD Werkendam – Nederland

**GOODWAY**  
BENELUX