
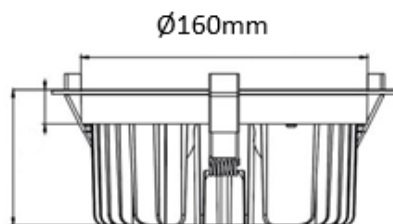


GELED downlight opaal 190mm



Productspecificaties

Artikel nummer	GE-W-190-M-3
IP-Waarde	IP 44
Input	AC230V
Kleur temperatuur	3000k
Bundel	90 graden
Driver	Lifud
Chip	COB
Lumen	8W > 850lm (driver) 12W > 1250lm (driver) 16W > 1600lm (driver) 20W > 2000lm (driver)
Afmeting	190x60mm
Gatmaat	165mm
Dimbaar	Optioneel

***Standaard geleverd met Lifud driver incl. 30cm kabel en 3-polig GST**

Technische specificaties

CRI	85
Macadam	3 SDCM
Efficiency	100-106lm/w
Product life minimum	50.000h L90 B50
Chip	COB
Driver	Lifud
Diffuser	N.v.t
TA	-20C TA/max
Powerfactor	0,96
UGR	19
Certificaten	CE/ROHS /EneC(driver)