
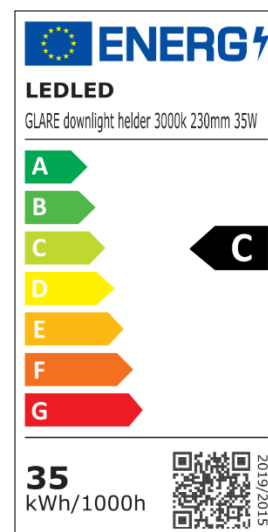
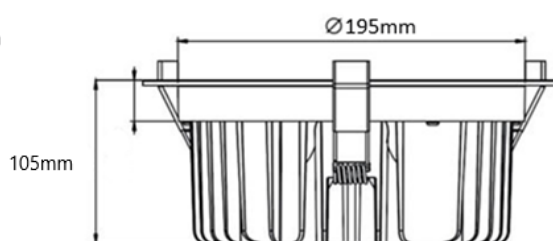


GLARE downlight helder 230mm



Productspecificaties

Artikel nummer	LL-GL-230-3
Artikel nummer	LL-GL-230-4
IP-Waarde	IP 44
Input	AC230V
Kleur temperatuur	3000k, 4000K
Bundel	60 graden
Driver	Lifud
Chip	COB
Lumen	8W > 1141lm (driver) 3000k 12W > 1752lm (driver) 3000k 16W > 2320lm (driver) 3000k 20W > 2860lm (driver) 3000k 25W > 3775lm (driver) 3000k 30W > 4350lm (driver) 3000k 35W > 5075lm (driver) 3000k 8W > 1216lm (driver) 4000k 12W > 1836lm (driver) 4000k 16W > 2432lm (driver) 4000k 20W > 3020lm (driver) 4000k 25W > 3798lm (driver) 4000k 30W > 4500lm (driver) 4000k 35W > 5250lm (driver) 4000k
Afmeting	230x105mm
Gatmaat	195mm
Dimbaar	Optioneel

***Standaard geleverd met Lifud driver incl. 30cm kabel en 3-polig GST**

Technische specificaties

CRI	85
Macadam	3 SDCM
Efficiency	140-150lm/w
Product life minimum	50.000h L90 B50
Chip	COB
Driver	Lifud
Diffuser	N.v.t
TA	-20C TA/max
Powerfactor	0,96
UGR	19
Certificaten	CE/ROHS /EneC(driver)