
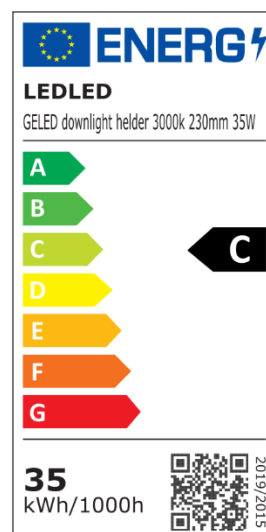


## GELED downlight helder zwart 230mm

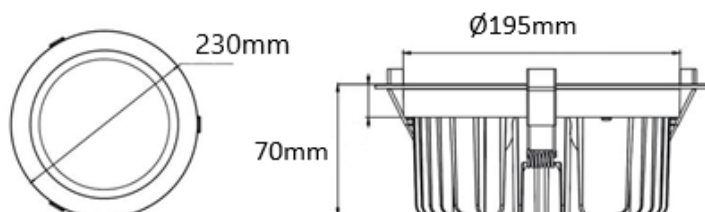

### Productspecificaties

Artikel nummer	<b>GE-W-230-3</b>
Artikel nummer	<b>GE-W-230-4</b>
IP-Waarde	<b>IP 44</b>
Input	<b>AC230V</b>
Kleur temperatuur	<b>3000k, 4000K</b>
Bundel	<b>60 graden</b>
Driver	<b>Lifud</b>
Chip	<b>COB</b>
Lumen	<b>8W &gt; 1141lm (driver) 3000k</b> <b>12W &gt; 1752lm (driver) 3000k</b> <b>16W &gt; 2320lm (driver) 3000k</b> <b>20W &gt; 2860lm (driver) 3000k</b> <b>25W &gt; 3775lm (driver) 3000k</b> <b>30W &gt; 4350lm (driver) 3000k</b> <b>35W &gt; 5075lm (driver) 3000k</b> <b>8W &gt; 1216lm (driver) 4000k</b> <b>12W &gt; 1836lm (driver) 4000k</b> <b>16W &gt; 2432lm (driver) 4000k</b> <b>20W &gt; 3020lm (driver) 4000k</b> <b>25W &gt; 3798lm (driver) 4000k</b> <b>30W &gt; 4500lm (driver) 4000k</b> <b>35W &gt; 5250lm (driver) 4000k</b>
Afmeting	<b>D230X72mm</b>
Gatmaat	<b>195mm</b>
Dimbaar	<b>Optioneel</b>

**\*Standaard geleverd met Lifud driver incl. 30cm kabel en 3-polig GST**

---

## Technische specificaties

CRI	<b>85</b>
Macadam	<b>3 SDCM</b>
Efficiency	<b>140-150lm/w</b>
Product life minimum	<b>50.000h L90 B50</b>
Chip	<b>COB</b>
Driver	<b>Lifud</b>
Diffuser	<b>N.v.t</b>
TA	<b>-20C TA/max</b>
Powerfactor	<b>0,96</b>
UGR	<b>19</b>
Certificaten	<b>CE/ROHS /EneC(driver)</b>