
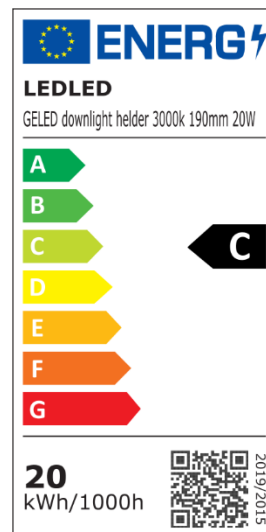


GELED downlight helder zwart 190mm

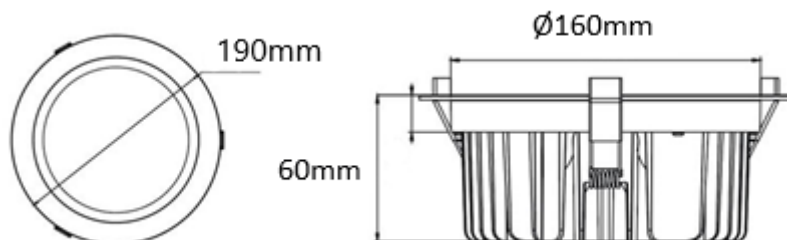

Productspecificaties

Artikel nummer	GE-W-190-3-ZW
Artikel nummer	GE-W-190-4-ZW
IP-Waarde	IP 44
Input	AC230V
Kleur temperatuur	3000k, 4000K
Bundel	60 graden
Driver	Lifud
Chip	COB
Lumen	8W > 1141lm (driver) 3000k 12W > 1752lm (driver) 3000k 16W > 2320lm (driver) 3000k 20W > 2860lm (driver) 3000k 8W > 1216lm (driver) 4000k 12W > 1836lm (driver) 4000k 16W > 2432lm (driver) 4000k 20W > 3020lm (driver) 4000k
Afmeting	D190x60mm
Gatmaat	160mm
Dimbaar	Optioneel

***Standaard geleverd met Lifud driver incl. 30cm kabel en 3-polig GST**

Technische specificaties

CRI	85
Macadam	3 SDCM
Efficiency	140 - 150lm/w
Product life minimum	50.000h L90 B50
Chip	COB
Driver	Lifud
Diffuser	N.v.t
TA	-20C TA/max
Powerfactor	0,96
UGR	19
Certificaten	CE/ROHS /Enec(driver)