



x
neverdark

Chalet-II (C2)

Installation instructions

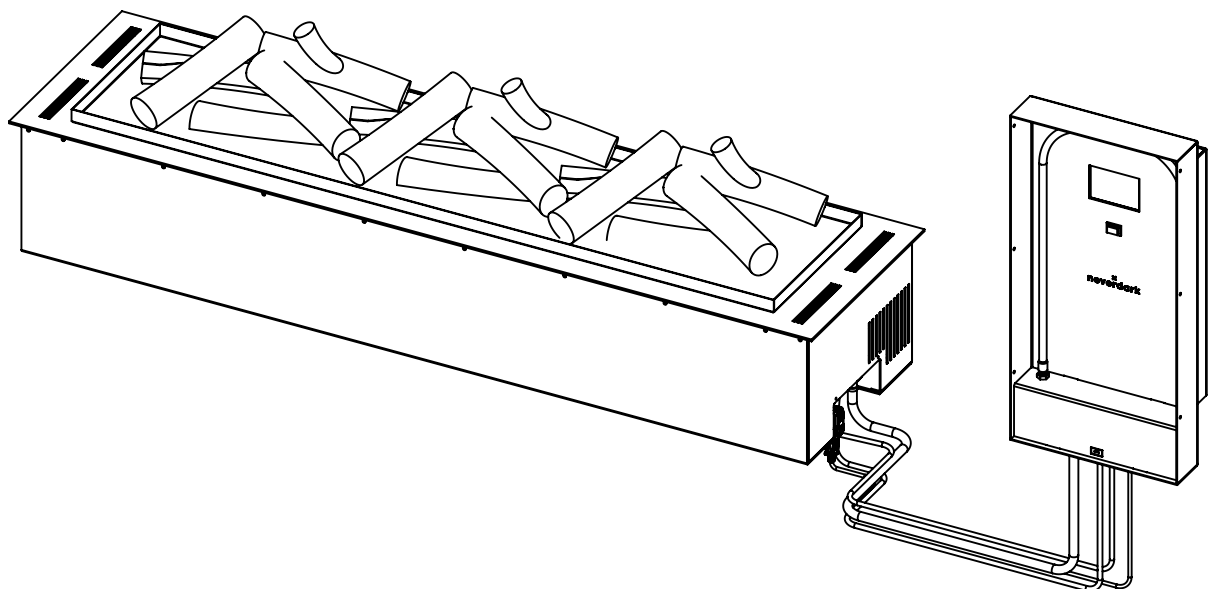


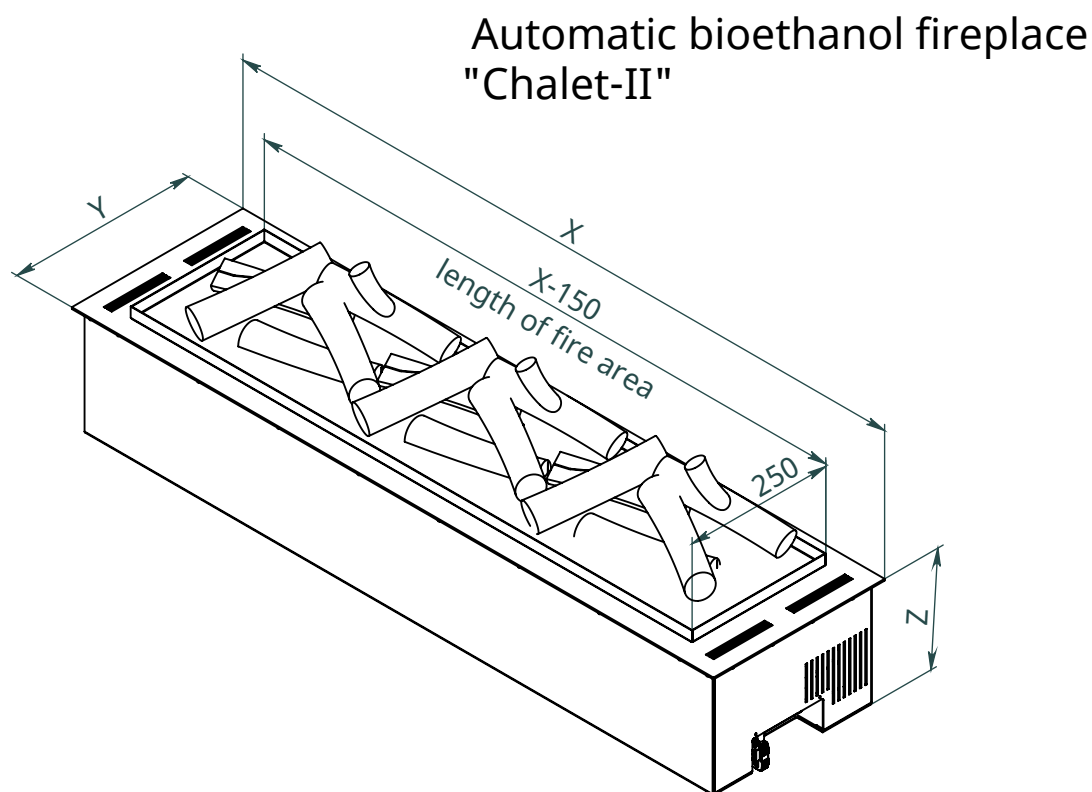

	X	Y	Z		
Model	Length	Width	Height	Weight, kg	Power consumption, W
C2-700	700	320	205	21.1	900
C2-950	950			26	900
C2-1200	1200			29	1600

- Automatic bioethanol fireplace "Chalet-II"
- Manufacturer: NEVERDARK LLC, Ukraine.
- This document is a part of the device.
- For decorative and domestic use only.
- Keep away from children.
- Ensure that the wall/table/floor on which you place the appliance can support its weight.
- Install only in a place protected from draughts.
- Do not cover top and side ventilation grids.
- Do not place flammable objects on the appliance.
- Keep a carbon dioxide fire extinguisher within sight.

Standard

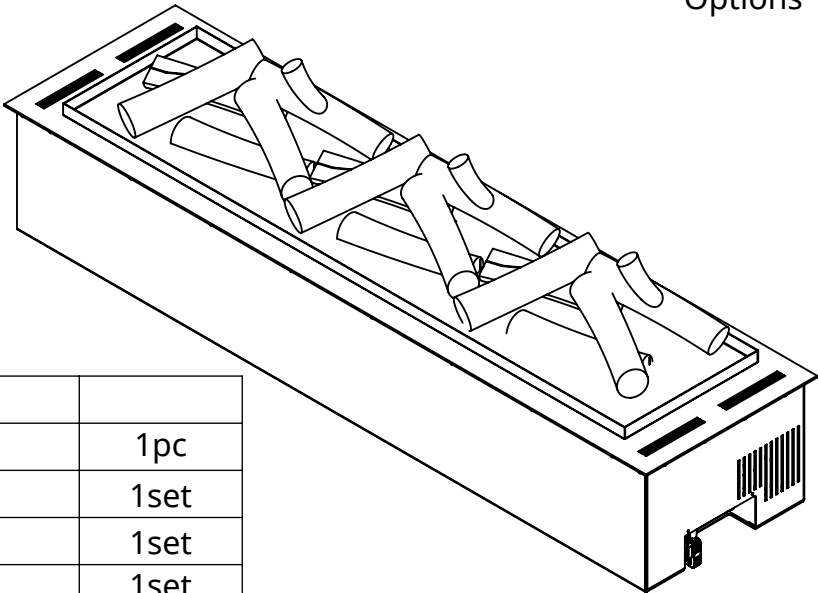


Standard configuration	
Fireplace	1pc
Stones	1set
Ceramic firewood	1set
Fiber for glow effect	1set
Power cable with plug (eur)	1pc
Filling hose	1pc
Fuel drain hose (service only)	1pc
Instructions	1pc
Warranty card	1pc
Micro USB cable (service only)	1pc
Packaging	1set
ARS	1pc
Fuel hose	1pc
USB cable	1pc
High Voltage cable	1pc
Low Voltage cable (RJ45)	1pc
Options (if any)	

Options



Glass border

RAL


Available options	
GB(1,2)	Glass Border
CT(R)	Custom top (RAL)
RC	Remote Control
SH	Smart Home Connection Module

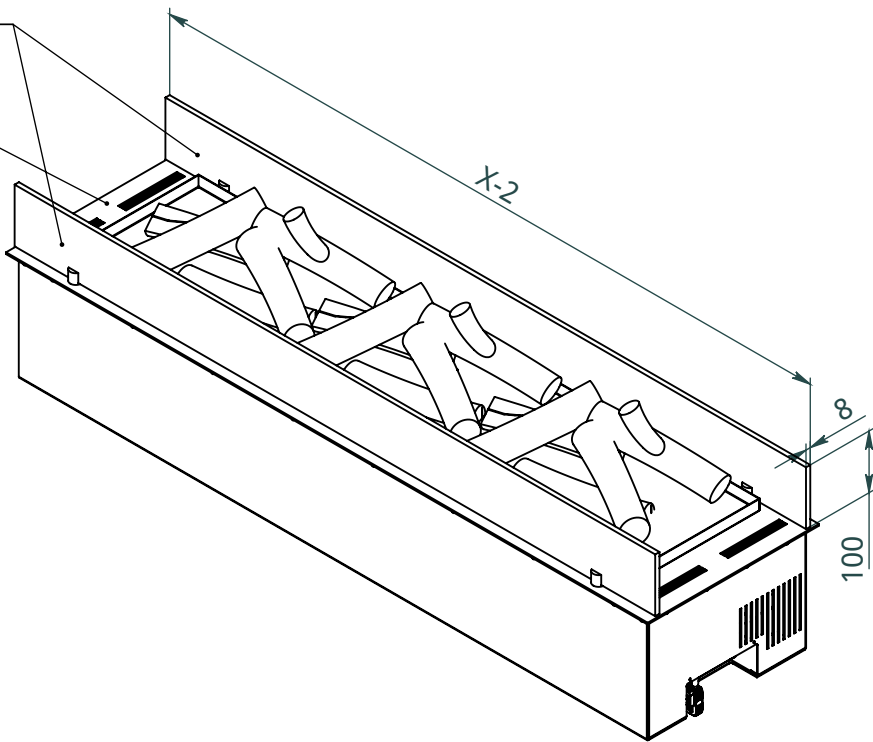

Fireplace

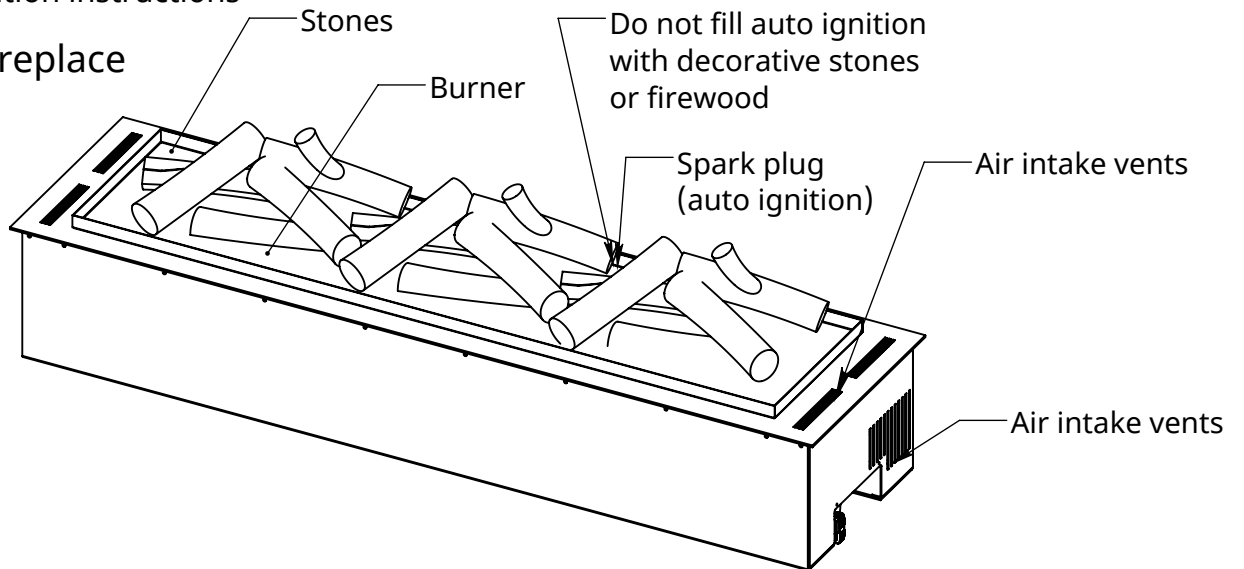

Power cable 220V








ARS fuel communication port

ARS communications port


Drainer (only for service professionals)

ARS (External module for control and refueling)

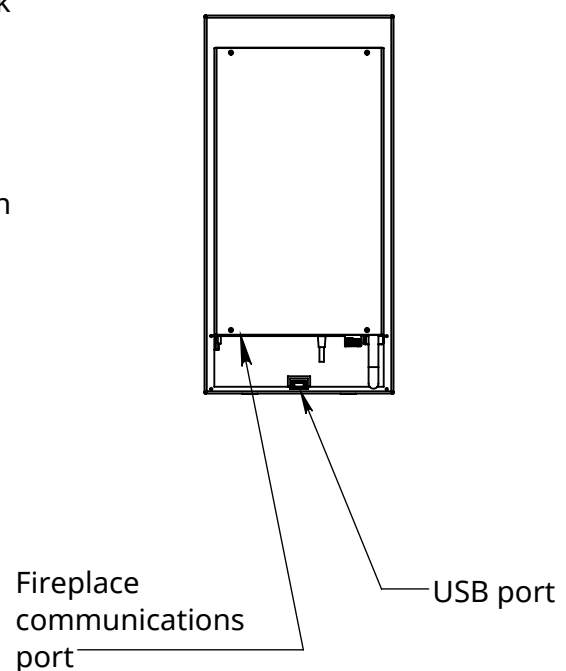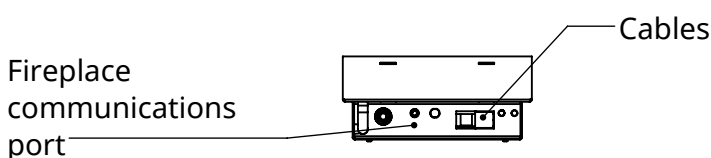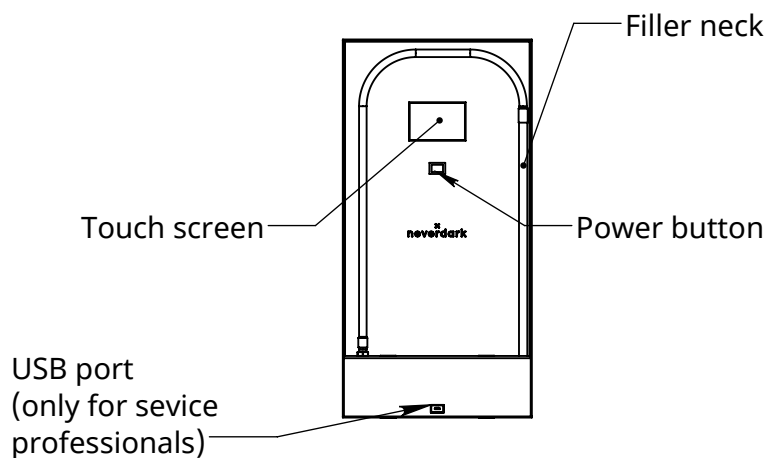


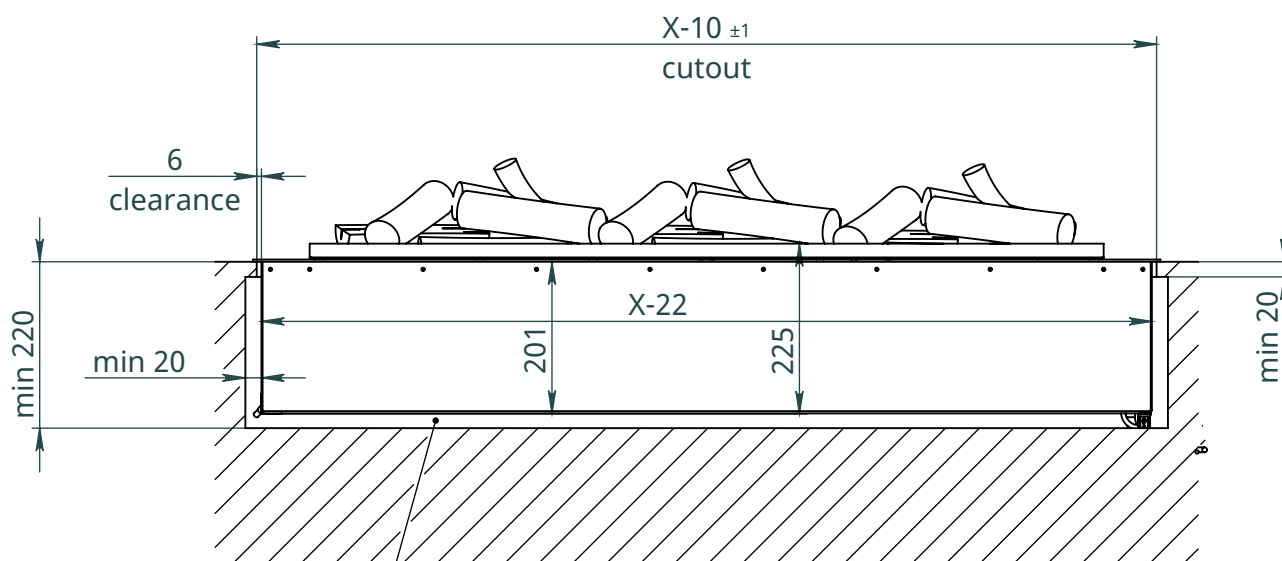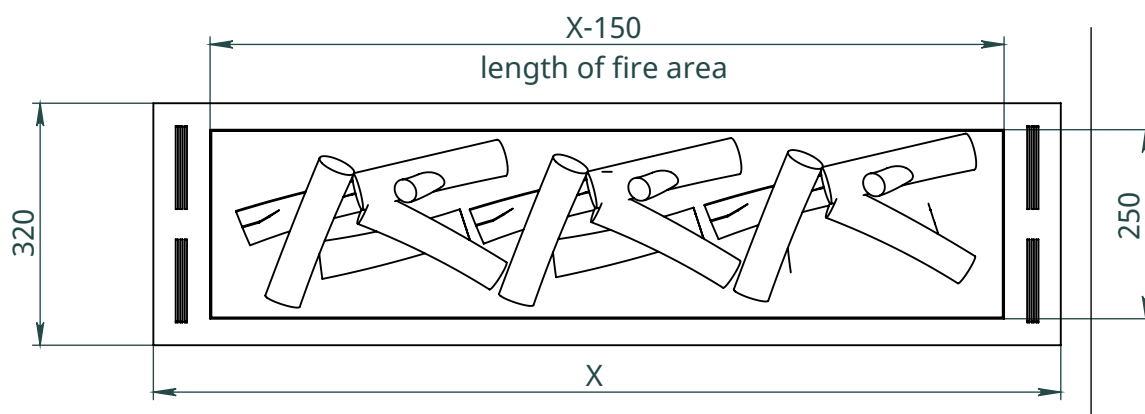

Required
air supply
into the fireplace niche
at least 10x10 cm

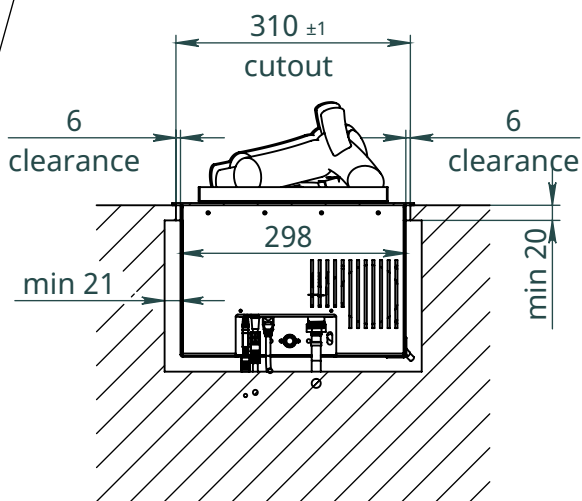



Safe installation of the appliance


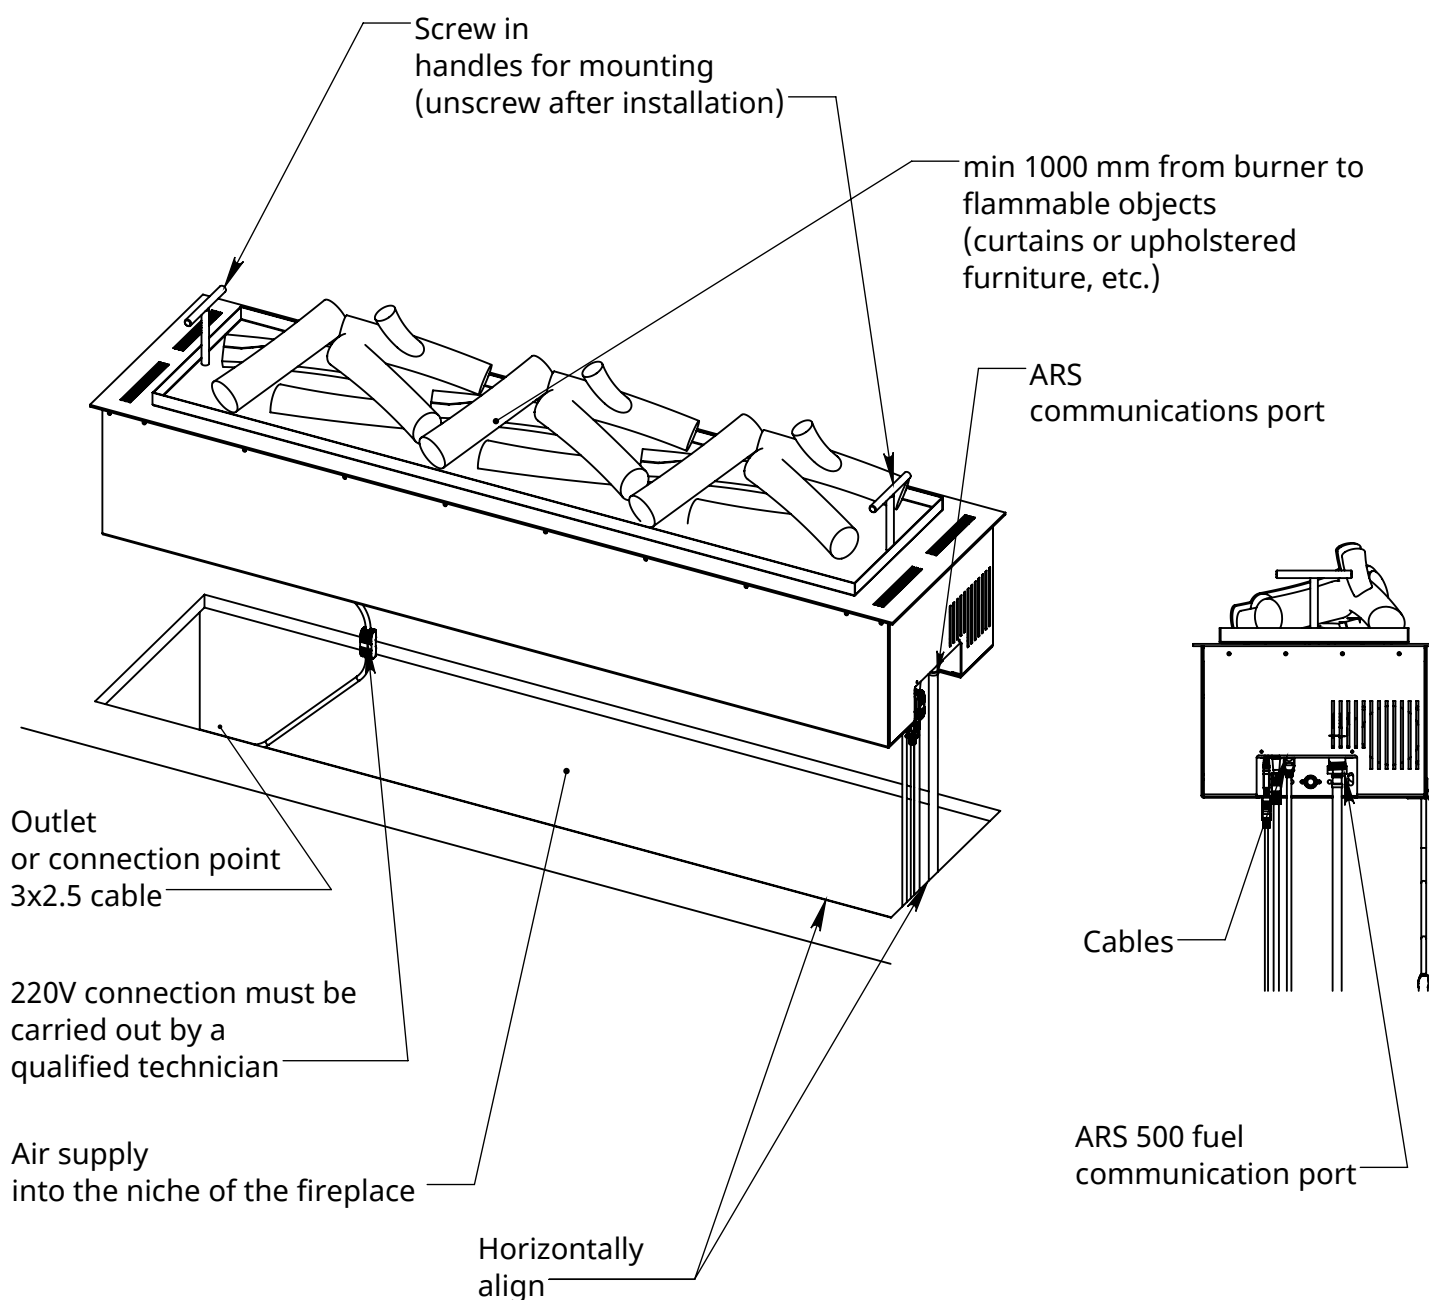


It is mandatory to use a separate line with a circuit breaker with a rating of at least 10A


WARNING!

- Installation of the fireplace not on a horizontal level can lead to malfunction of the fireplace and possible fuel spillage.
- Only a qualified specialist should connect the cable to the power network.
- The fireplace mounted into in the prepared niche by holding the previously installed handles for installation, then the handles must be removed (unscrewed) and not used during the operation of the fireplace.
- If it is necessary to remove the fireplace from the niche, reinstall the installation handles.

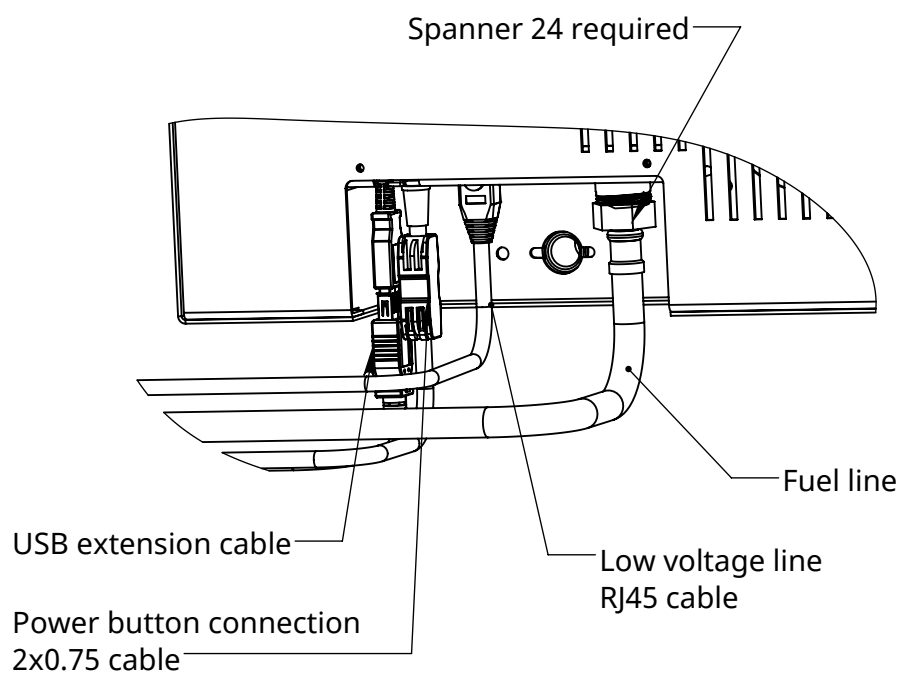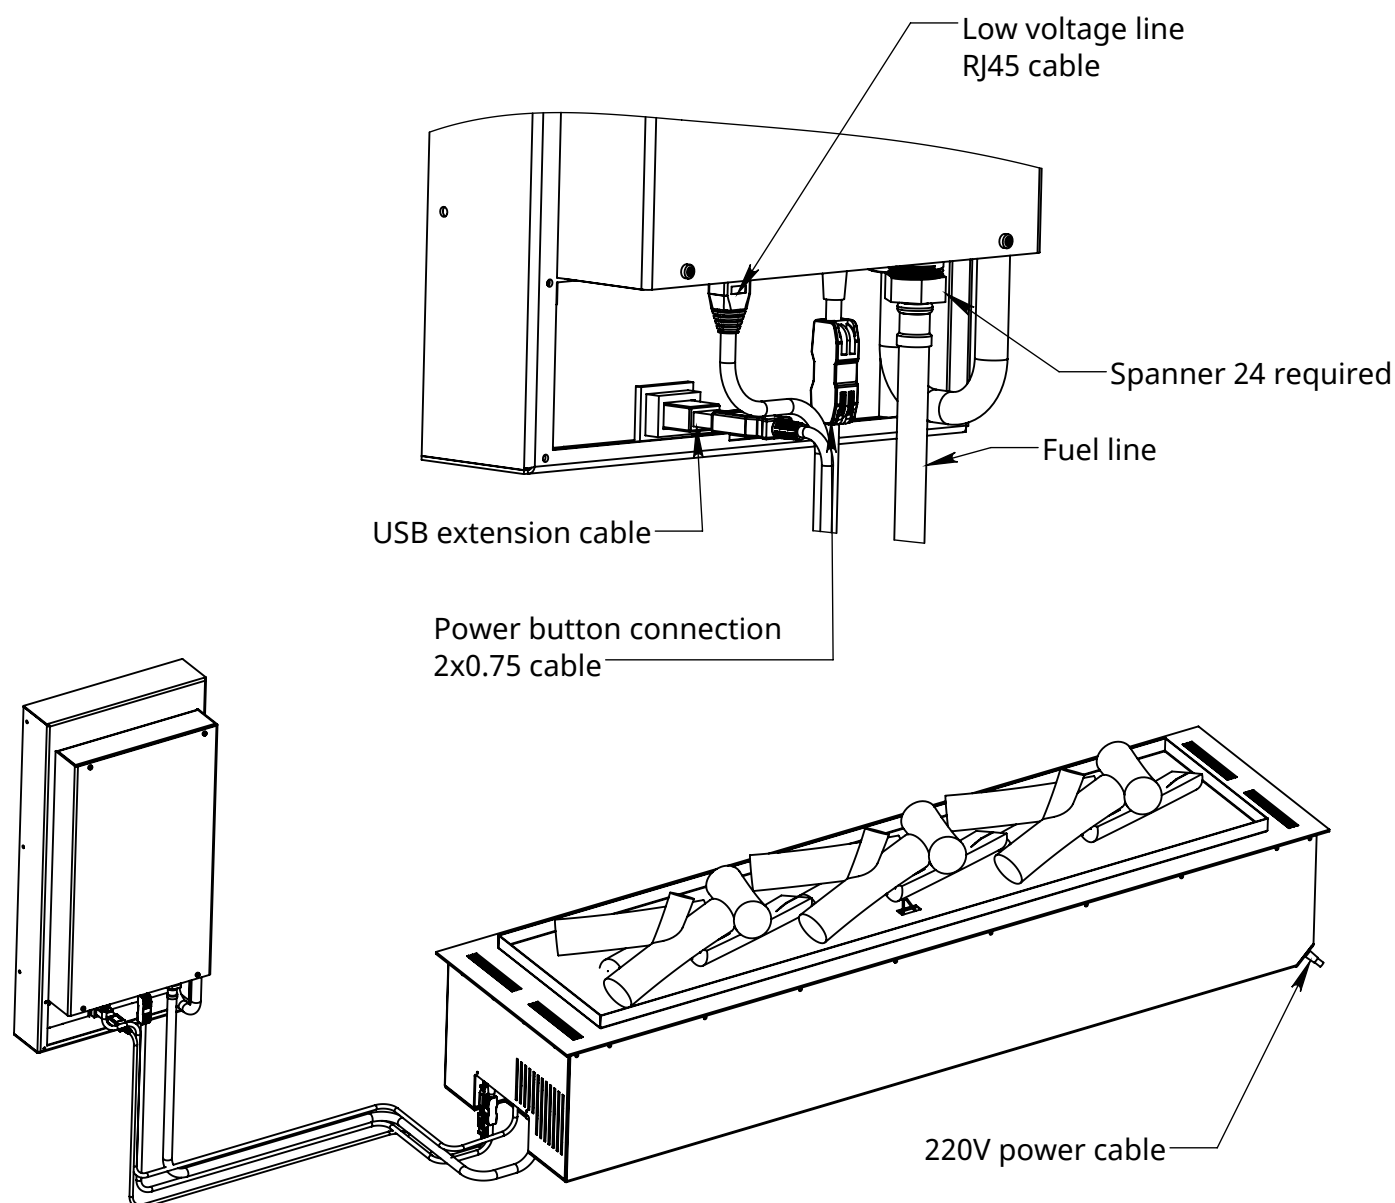

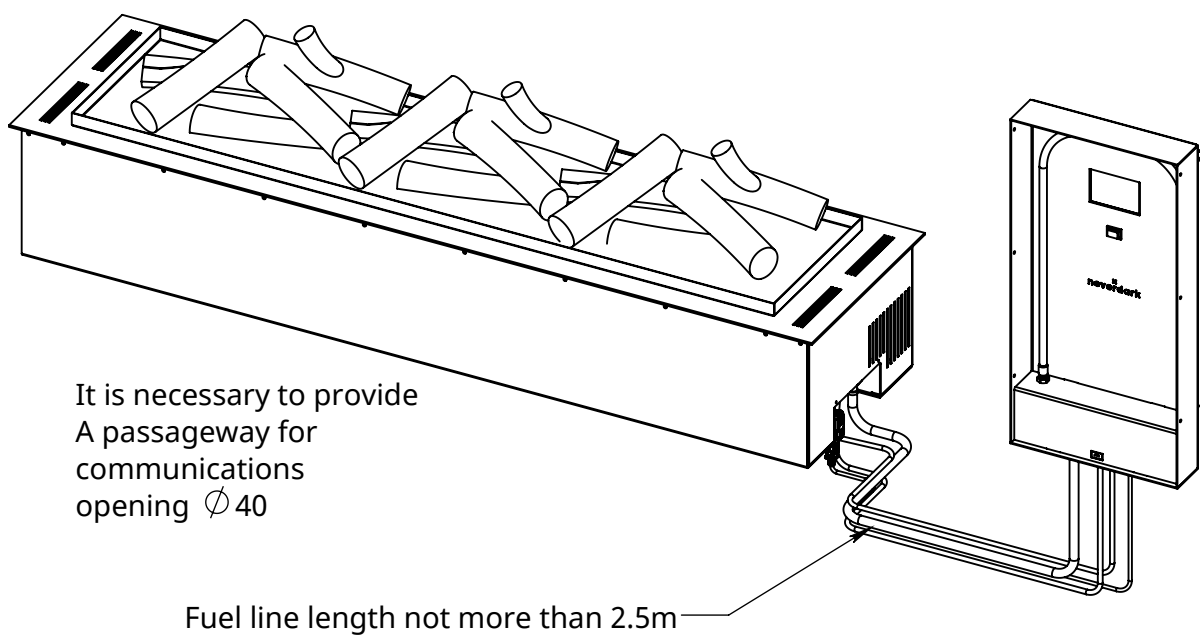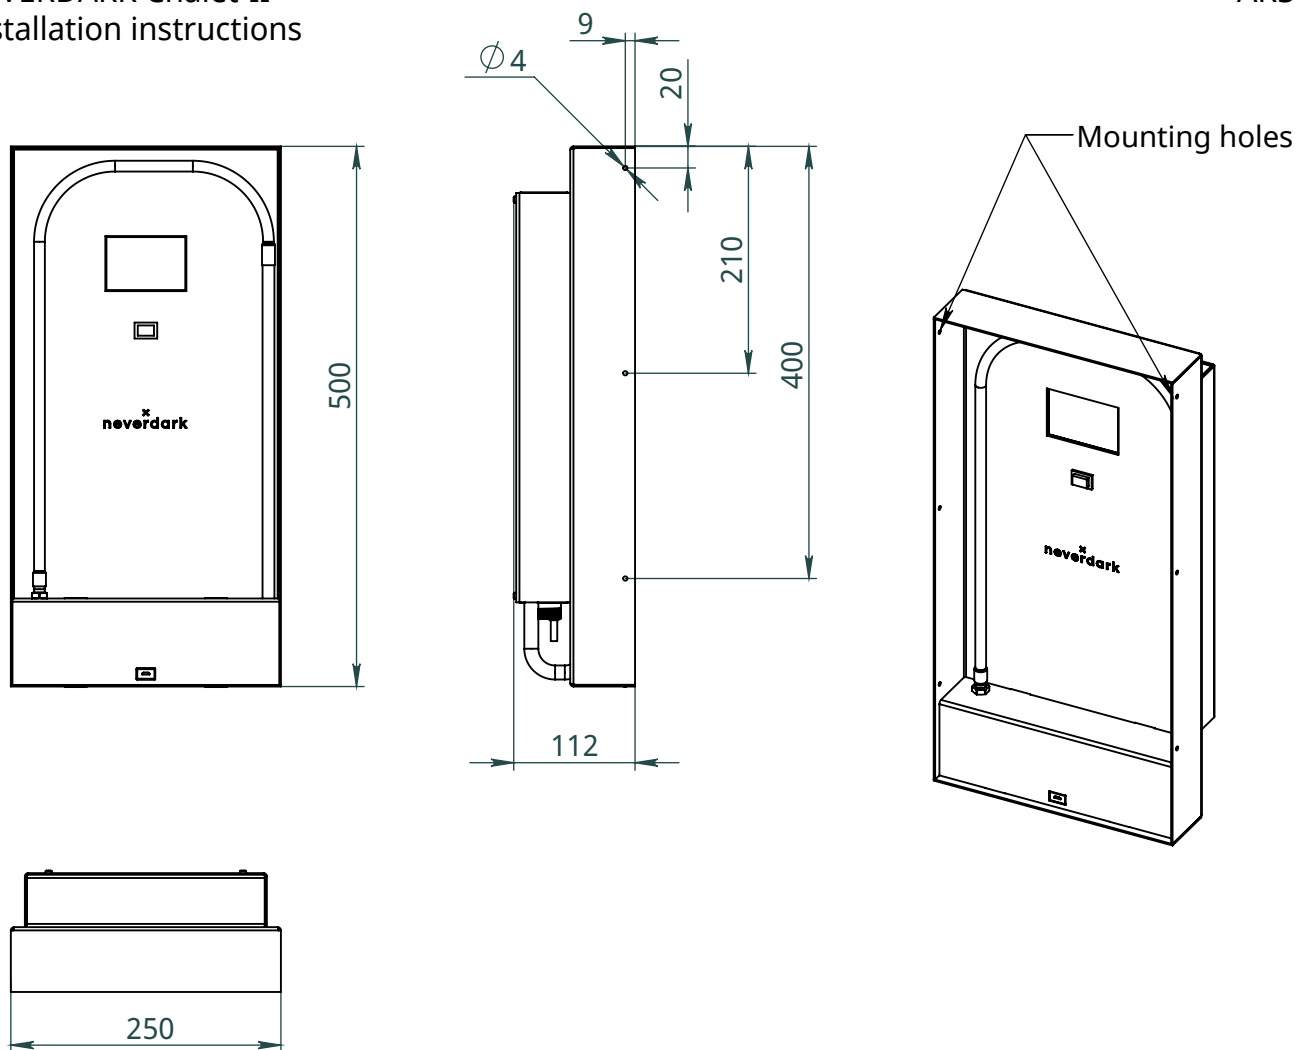

Mounting without the use of a thermobox

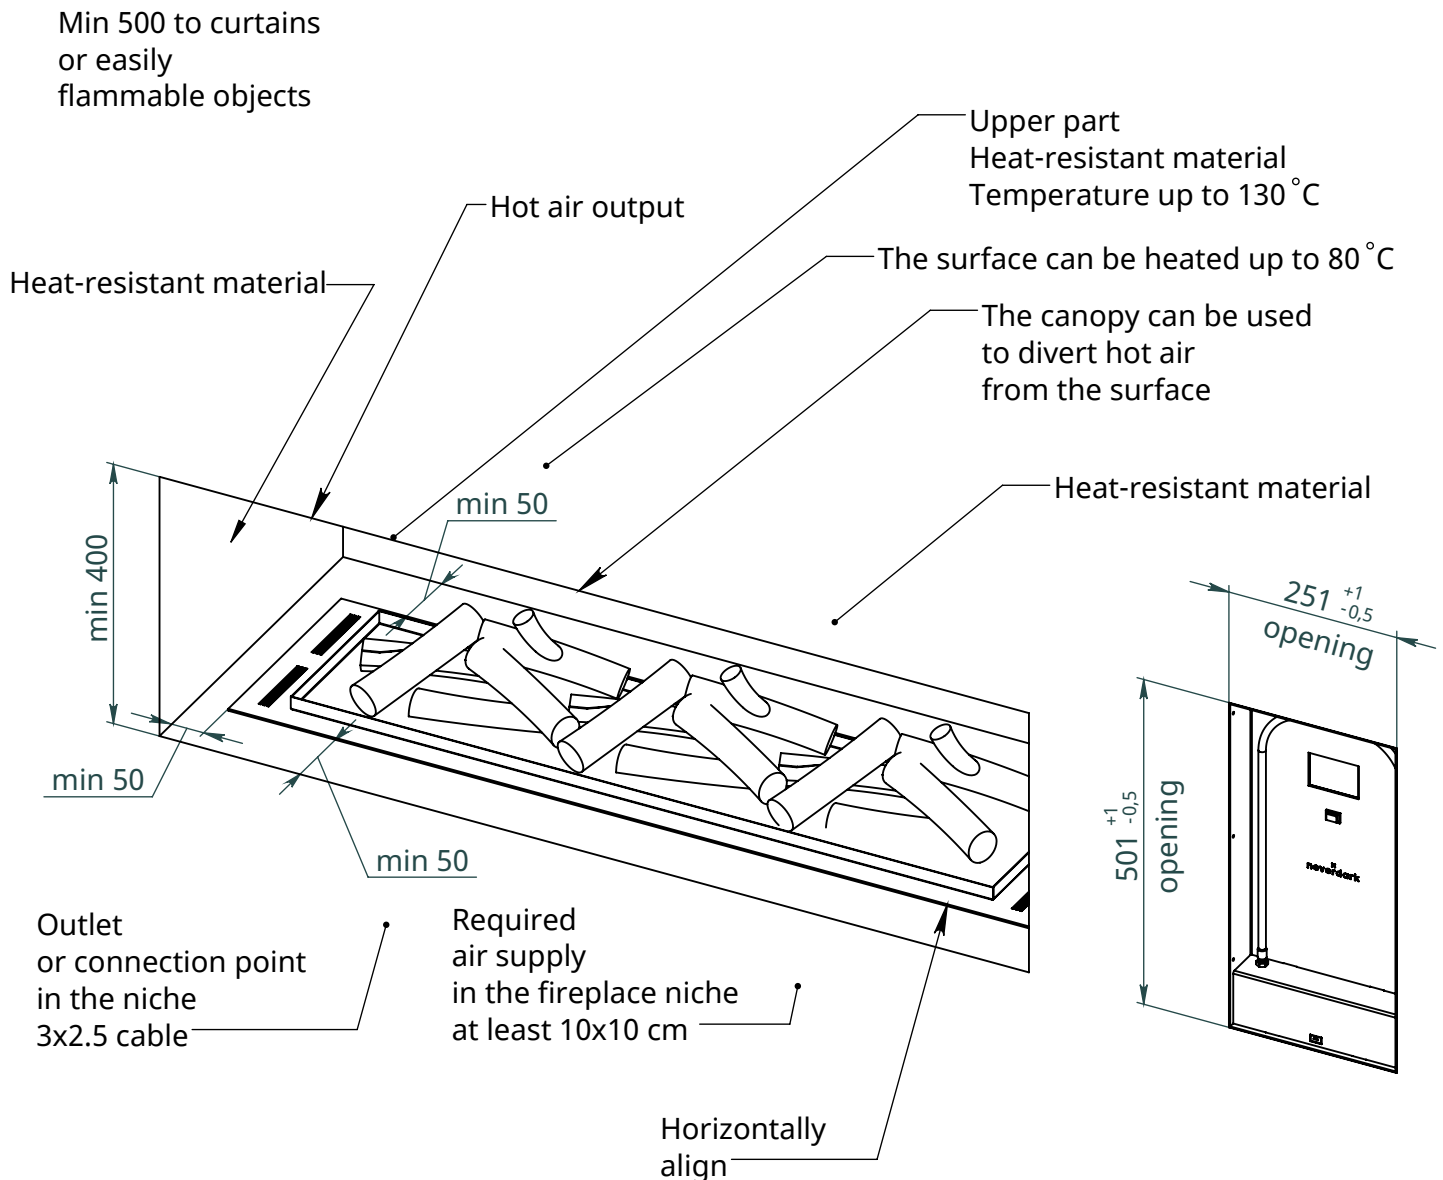

For comfortable use of the fireplace it is necessary to ensure the supply of fresh air into the room and a removal of combustion products. It can be a ventilation extractor, recuperator or an opened window.

WARNING!

The manufacturer does not recommend placing objects above or next to the fireplace that are sensitive to high temperatures, as this can significantly shorten their service life. If the installation instructions were not followed, the manufacturer is not responsible for any damage to objects above or next to the fireplace resulting from exposure to high temperatures.

There must be a fire extinguisher in the room within sight.