

Swivel castor with total brake, Ø200 x 50 mm

Black rubber tyre on zinc-plated steel rim, roller bearing, top plate 135 x 108 mm.
For 4-wheel waste containers.

250 kg

Load capacity at 4 km/h

Ø200 x 50 mm


Wheel diameter x width

240 mm

Total height

105 x 80 mm

Hole spacing, bolt hole Ø11

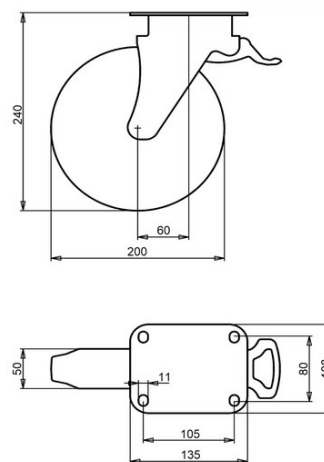

Specifications

Wheel diameter	200 mm	Bearing	Roller bearing
Wheel width	50 mm	Tread material	Black rubber
Load capacity at 4 km/h	250 kg	Tread hardness	80 Shore A
Static load capacity	310 kg	Wheel centre	Steel rim, zinc plated, Cr6-free
Total height	240 mm	Brake	Total brake
Offset	60 mm	Directional lock	Optional
Fitting	Top plate	Temperature range	-20 to +70 °C
Top plate size	135 x 108 mm	Short exposure (10 min)	-30 to +80 °C
Hole spacing	105 x 80 mm	Weight	2.9 kg
Bolt hole Ø	11 mm	EAN	3838461447921

Standards and notes

- For mobile waste containers to EN 840 (castor requirements: EN 840-5). Test references on request.
- Load capacity is stated per castor at 4 km/h.
- Zinc electroplating is Cr6-free (RoHS).
- 2D drawing and STEP model on request: info@livsystems.eu.