

General characteristics

e-Charger: Trydan
 Color: Black
 Material: Polycarbonate MVR
 Weight: 7 kg
 Charging Cable length: 5 m / 10 m
 Charging Cable type: Flat / Spring
 Operating temperature: from -25° to 50°
 Storage temperature: from -40° to 70°
 Display*1: 2,6"
 RGB lighting depending on state of charge

Electrical characteristics

Conector type: Type 2 / Socket
 Voltage: 230V / 400V
 Maximum power output: 7,4 - 22kW*1
 Adjustable current: 6 - 32A (per phase)
 Nominal frequency: 50Hz / 60Hz
 Protection class: IP54 / IK10
 Residual current detection: AC 30mA / DC 6mA*1
 MID meter*2


*1 Depending on the model

*2 Optional

Part number structure

| | | | |
|------------------------|--------------|-----|-----------|
| Model | | | TRY |
| Intensity | | | 32 |
| Grid type | Single-phase | | 1 |
| | Three-phase | | 3 |
| Cable type | Flat | 5m | L5 |
| | | 10m | L10 |
| | Spring | | M |
| | Socket | | S |
| Protections | | | P |
| Schuko | | | SC |
| Accessories: | | | |
| Leak detector | | | V2C-F |
| Remote | | | V2C-R |
| Cable support | | | V2C-SOP |
| Stand | | | V2C-PED |
| Single-phase MID meter | | | V2C-MID-1 |
| Three-phase MID meter | | | V2C-MID-3 |

Dimensions

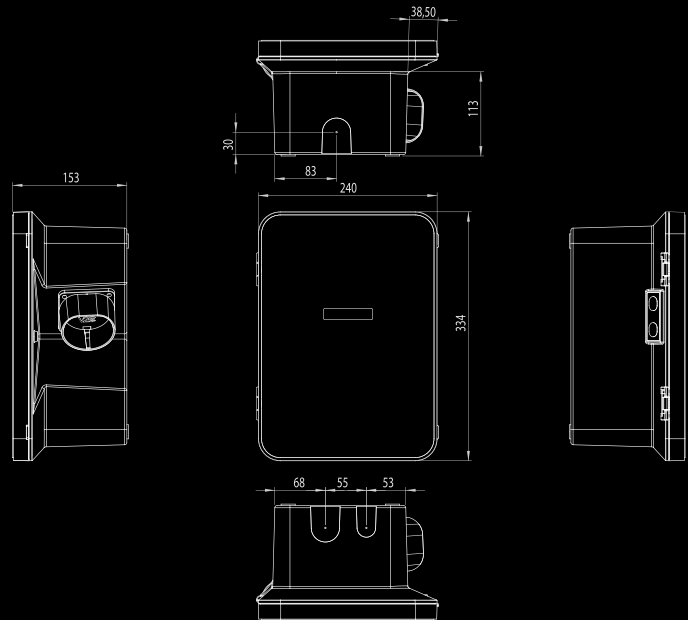

Functional characteristics

User platform: APP & V2C Cloud portal
 Connectivity: WiFi / Bluetooth
 Communication: OCPP / Rest API Cloud
 Configuration with smart devices: Alexa, Google Home

TRY32-1-L5-P-SC

