

CC30-MODE C


Effortless Charging, Unbeatable Value. The Best Cost-Effective Solution.



Specifications

Dimension

- mm -

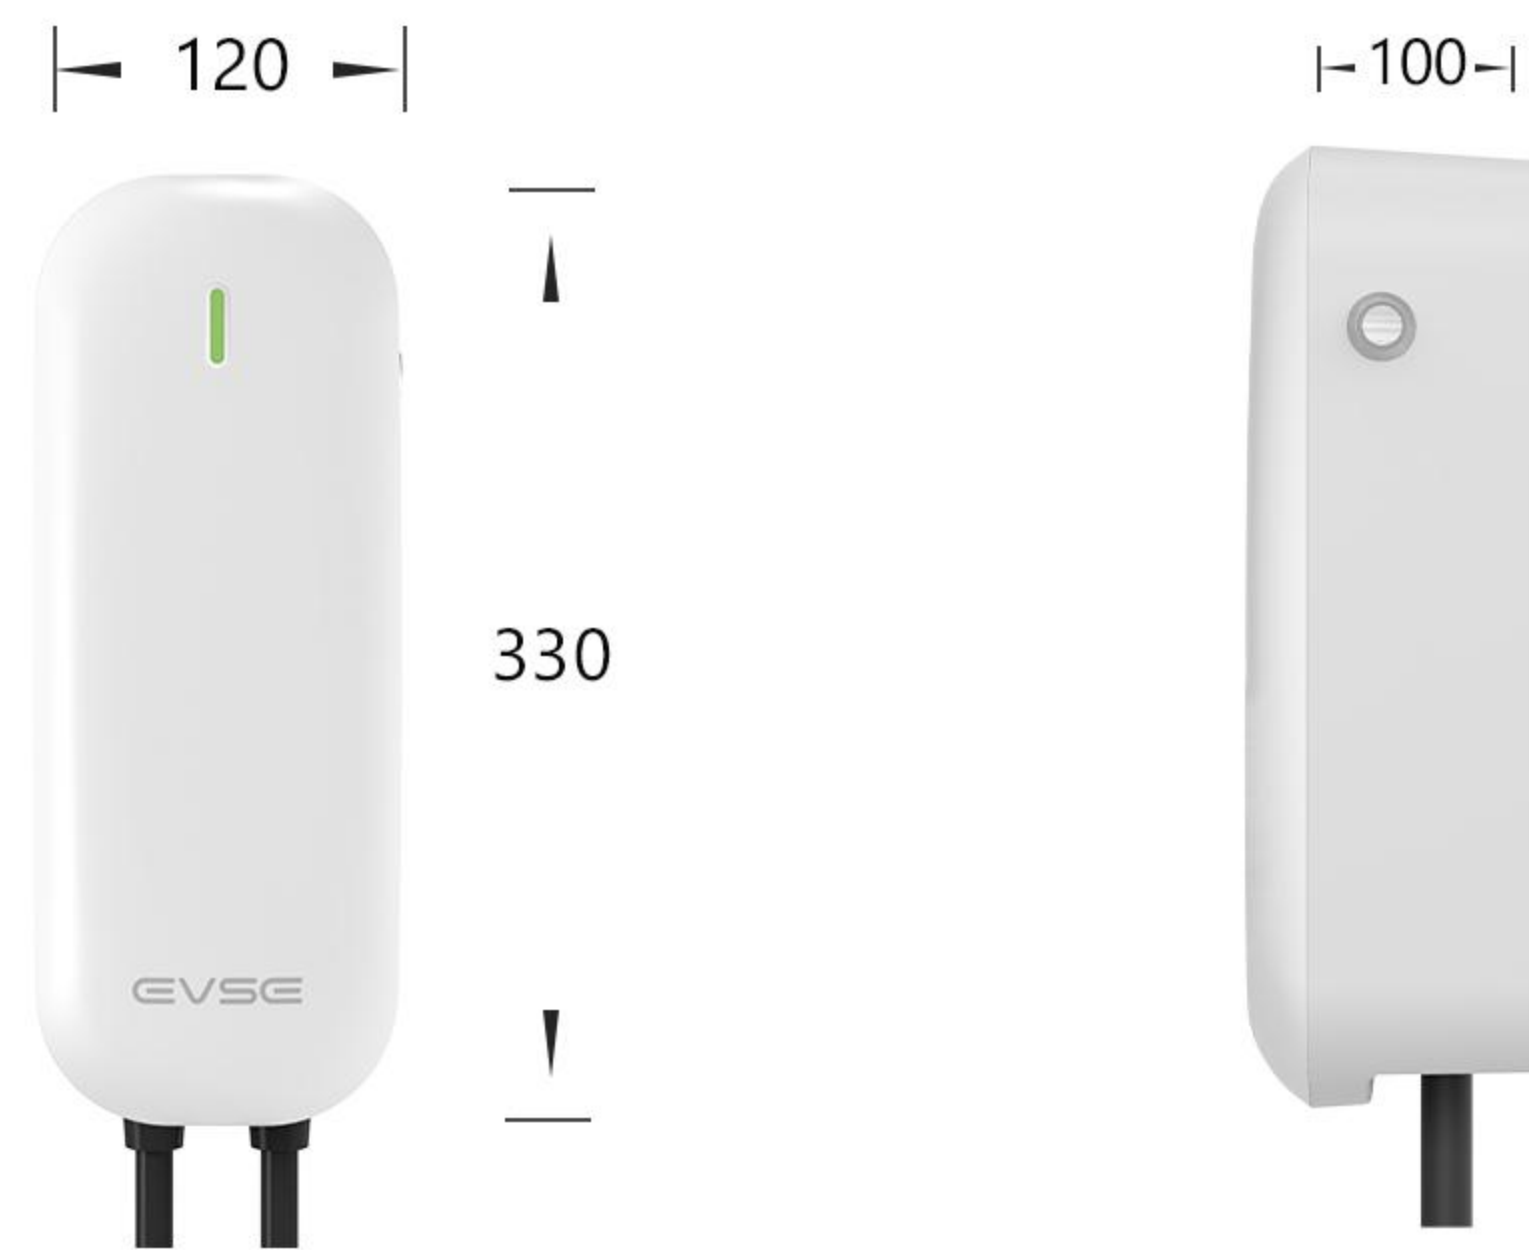

Colours



Electrical Specification

Rated Voltage	230V /400V (Three Phase)
Input frequency	50Hz /60Hz
Output power	3.6kW / 7.2kW / 11kW / 22kW
Output current	16A/32A
Charging interface type	IEC 62196-2 SAE J1772

Working Environment

Protection degree	IP66
Environment temperature	-25°C ~ +55°C
Relative humidity	5%-95% non-condensing
Maximum altitude	<2000m

Function and Accessory

RCD	Type A+ DC 6mA
LED Indicator light	Yes
Intelligent power adjustment	Yes
RFID	Only available on RFID model
APP	Only available on APP model

Certificate

CE	IK10
RoHS	IP66
FCC	UKCA