


# ISOMAX 315 - 2380

## TECHNICAL DATASHEET

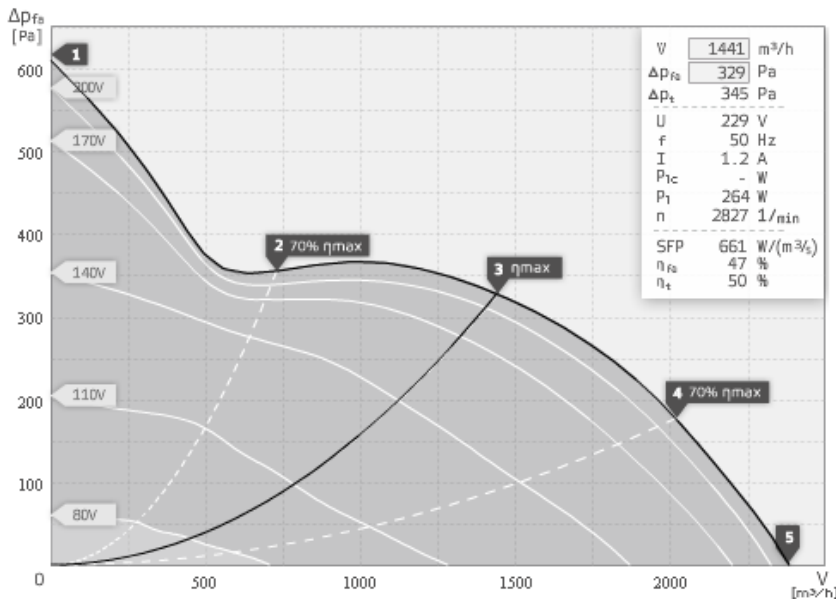

- ETALINE sound insulated
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	1,2	1	1,2	1,2	1,2
Power Consumption P1	W	271	209	265	279	265
RPM n	1/min	2821	2877	2828	2819	2840
SPL inlet LWA5	dB(A)	75	72	70	72	74
SPL outlet LWA6	dB(A)	75	74	70	71	73
SPL casing break out LWA2	dB(A)	61	59	54	55	59

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	70	38	50	63	63	63	63	62	54
Outlet	LWA6	70	35	49	62	65	66	58	59	50
Casing	LWA2	54	41	38	47	46	49	48	44	27

ELIX 315 E2 02   121198	
Voltage UN	230 V 1~
Current Imax	1,7
Ambient Temperature tA	55 °C
Medium Temperature tM	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	13,1 kg

