




MAX-FAN PRO SERIES 200 - 1218 m³/h

TECHNICAL DATASHEET

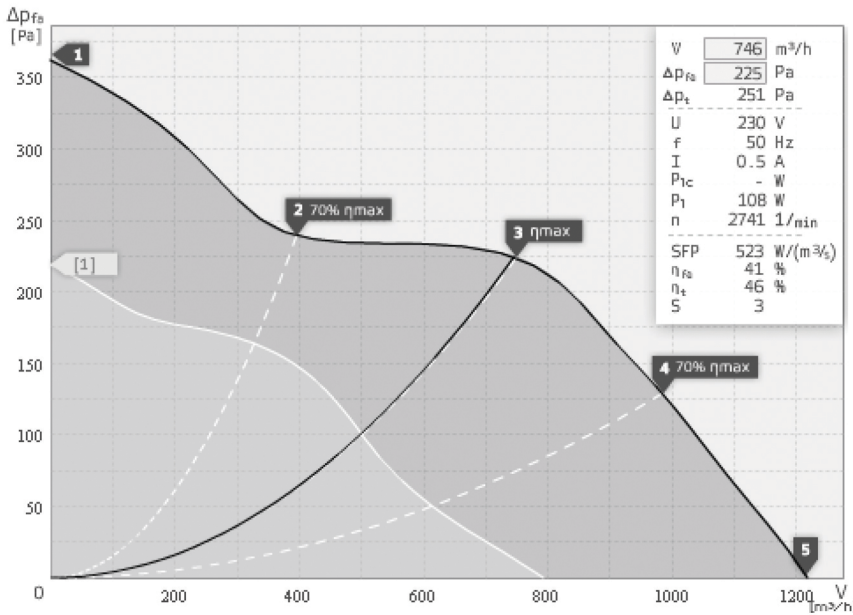

- Diagonal impeller with stator
- With Plastic housing
- With 2-step switch
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,5	0,4	0,5	0,6	0,5
Power Consumption P1	W	94	88	108	117	108
RPM n	1/min	2820	2849	2740	2707	2757
SPL inlet LWA5	dB(A)	72	70	72	73	73
SPL outlet LWA6	dB(A)	74	73	74	74	76
SPL casing break out LWA2	dB(A)	60	59	59	58	58

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	71	36	46	62	67	65	64	60	52
Outlet	LWA6	73	39	47	65	67	70	66	64	56
Casing	LWA2	59	41	42	54	51	53	53	44	34

EM 200 E2S 01 127013	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	4 kg

