




MAX-FAN PRO SERIES EC 150 - 776 m³/h

TECHNICAL DATASHEET

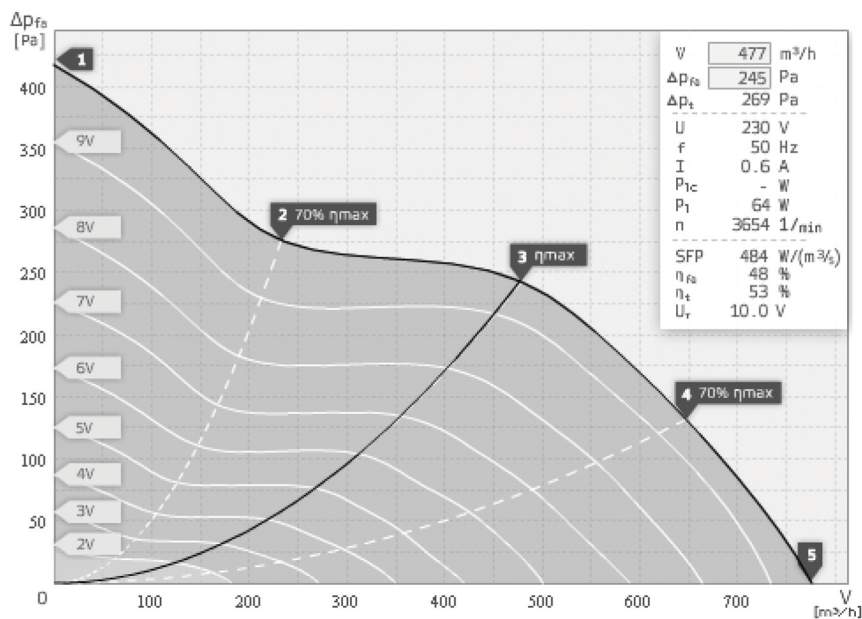

- Diagonal impeller with stator
- EC-motor
- Integrated electronic
- Variable speed control
- Internal electronic temperature monitoring
- Plastic housing
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,6	0,6	0,5
Power Consumption P1	W	57	51	64	67	63
RPM n	1/min	3722	3789	3653	3603	3635
SPL inlet LWA5	dB(A)	72	71	74	74	74
SPL outlet LWA6	dB(A)	73	72	75	76	77
SPL casing break out LWA2	dB(A)	59	57	56	56	57

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	73	40	53	62	71	67	66	60	52
Outlet	LWA6	74	42	51	62	68	71	67	65	57
Casing	LWA2	56	41	39	44	47	50	53	46	35

EM 150L EC 01 128588	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	45 °C
Medium Temperature tM	45 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	2,4 kg

