




MAX-FAN PRO SERIES EC 200 - 1301 m³/h

TECHNICAL DATASHEET

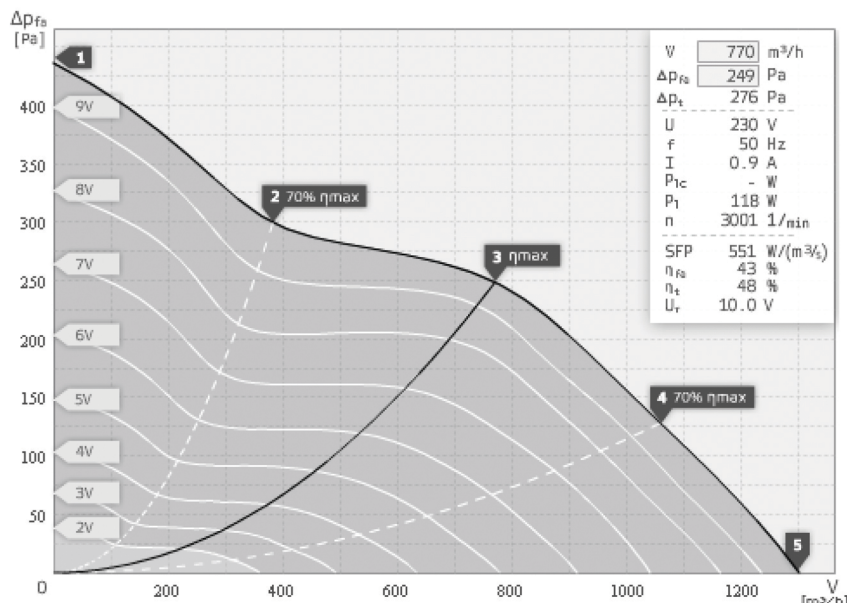

- Diagonal impeller with stator
- EC-motor
- Integrated electronic
- Variable speed control
- Internal electronic temperature monitoring
- Plastic housing
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,9	0,8	0,9	0,9	0,9
Power Consumption P1	W	112	101	118	118	119
RPM n	1/min	3084	3171	3002	2872	2959
SPL inlet LWA5	dB(A)	77	76	77	76	76
SPL outlet LWA6	dB(A)	78	78	79	78	79
SPL casing break out LWA2	dB(A)	63	62	62	61	62

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	77	41	58	67	73	72	70	64	57
Outlet	LWA6	79	41	59	69	73	75	71	68	59
Casing	LWA2	62	40	41	51	54	58	57	48	39

EM 200 EC 01 130561	
Voltage UN	230 V 1~
Current Imax	1
Ambient Temperature tA	45 °C
Medium Temperature tM	45 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	3,2 kg

