




Q-Max 200 - 1120 m³/h

TECHNICAL DATASHEET

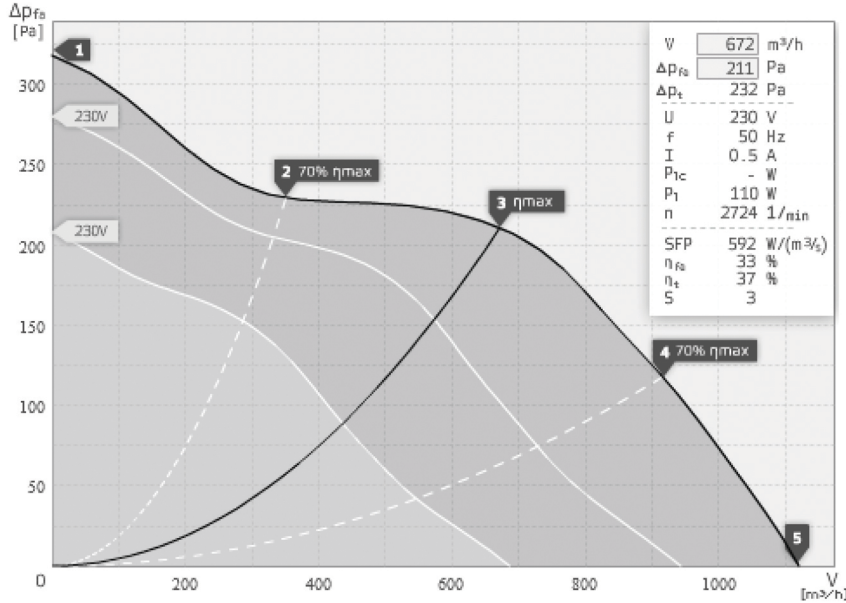

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- With 3-step switch
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,5	0,6	0,5
Power Consumption P1	W	92	90	110	121	116
RPM n	1/min	2828	2830	2724	2678	2708
SPL inlet LWA5	dB(A)	65	64	67	68	69
SPL outlet LWA6	dB(A)	67	66	69	71	72
SPL casing break out LWA2	dB(A)	57	56	56	55	56

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	66	37	52	63	62	55	56	54	46
Outlet	LWA6	68	37	56	64	65	59	50	45	38
Casing	LWA2	55	38	41	50	51	50	45	40	28

Q-Max AC 200, 1120, 3 speed 132155	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	40 °C
Medium Temperature tM	40 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

