


System Hardware & Accessories


System Hardware

(Depending on your product selection at the time of purchase)

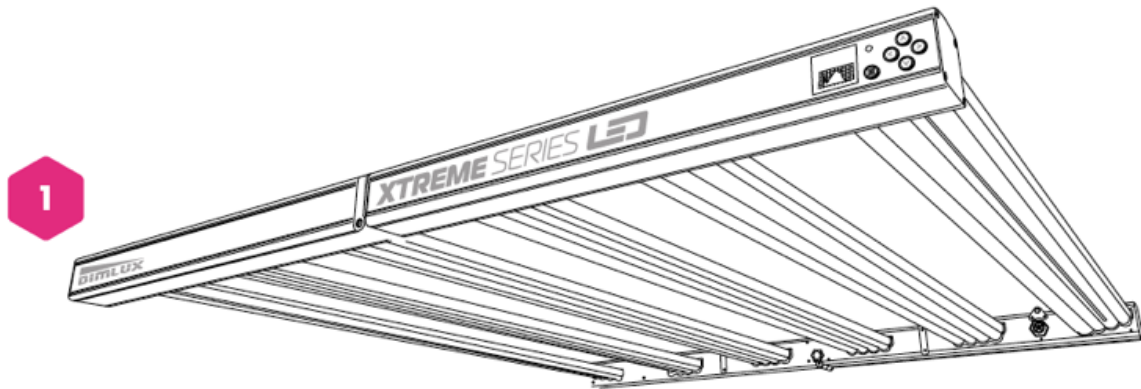


Dimlux Xtreme LED Fixture

500W LED (+), Xtreme 750W LED (+) or Xtreme 1000W LED (+) fixture pre-configured with:

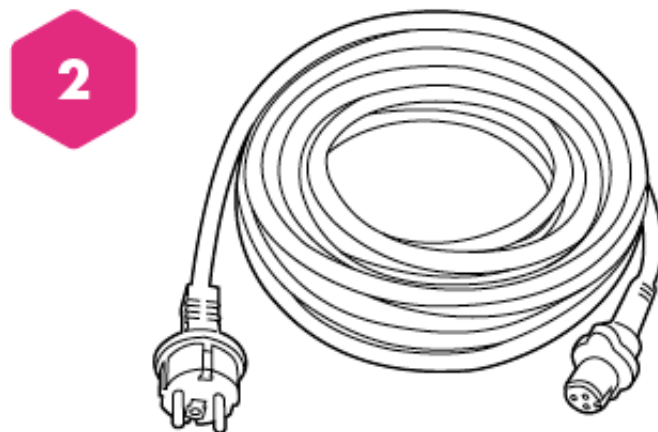

Standard DC Cable (EU/UK/USA)

(based on the continent of purchase)

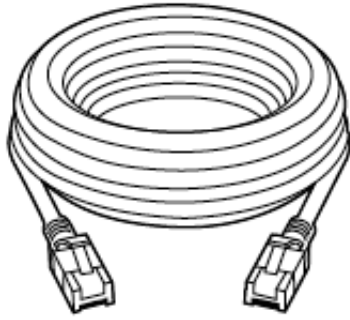
3

Digital Interlink Cable

(based on the LED fixture of purchase)

- Dimlux Xtreme Series 500W LED (+) > 2 m / 80 in – Digital Interlink Cable
- Dimlux Xtreme Series 750W LED (+) > 2.5 m / 100 in – Digital Interlink Cable
- Dimlux Xtreme Series 1000W LED (+) > 3 m / 120 in – Digital Interlink Cable

Mounting Hardware options

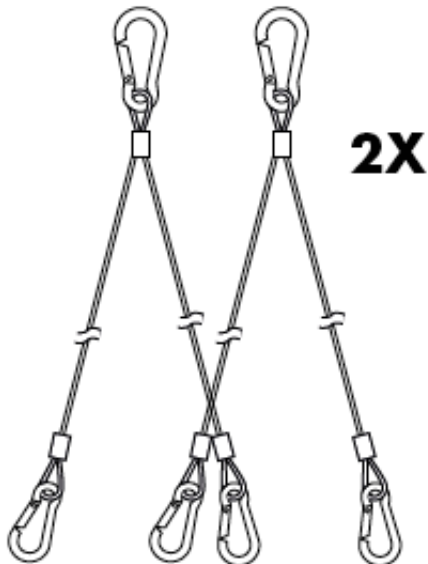4

2x bayonet mounting cables

Available Accessories

(Depending on your product selection at the time of purchase)

Dimlux Digital Plant Temperature Camera

With this DimLux plant temperature camera, the DimLux Xtreme Series LED can indicate whether the crop is in the ideal temperature range. If it is outside, this is indicated by the display and the auxiliary lighting. When connected to the Maxi controller, the lighting dims based on the plant temperature if it gets too high due to, for example, a water shortage. If the set value is exceeded, it is dimmed first to keep the temperature under control. If the temperature rises despite dimming, half of the dimmed lamps will switch off, if the temperature continues to rise, all lamps will switch off for at least 20 minutes.

Digital Interlink Cables available in different lengths:

- Dimlux Digital Interlink Cable 0.6 m (24 in.)
- Dimlux Digital Interlink Cable 1.0 m (40 in.)
- Dimlux Digital Interlink Cable 1.5 m (60 in.)
- Dimlux Digital Interlink Cable 2.0 m (80 in.)
- Dimlux Digital Interlink Cable 2.5 m (100 in.)
- Dimlux Digital Interlink Cable 3.5 m (140 in.)
- Dimlux Digital Interlink Cable 5.0 m (200 in.)
- Dimlux Digital Interlink Cable 10.0 m (400 in.)