
## • SPECIFICATION •



## • 1970 - CELESTE (3-IN-1) INSTANT HOT SINK MIXER

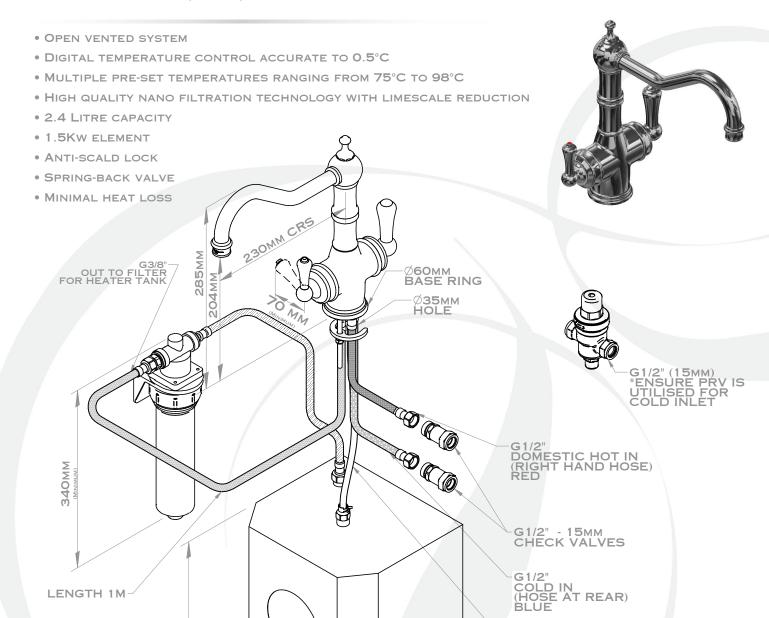

INLET TEMP RANGE: MIN 1°C / 34°F Max 85°C / 185°F

RECOMMENDED WORKING PRESSURE: MIN 1.5BAR / 22PSI MAX 3BAR / 43.5PSI

Pressure (BAR)	Flow (L/per Min)
1	5.0
2	7.6
3	9.2
4	11

• CHROME NICKEL 205MM 230MM

Ø5 I.D SILICONE TUBE FROM TANK

(1M MAX.)

• PEWTER

• GOLD

• ENGLISH BRONZE

• POLISHED BRASS

**AVAILABLE FINISHES:** 

• SATIN BRASS

• AGED BRASS

ENSURE PRESSURE REDUCING VALVE (PRV) IS USED INLINE WITH COLD INLET, FAILURE TO DO SO MAY RESULT IN REDUCED PRODUCT PERFORMANCE.

