



## 2.0. Features

- USB 2.0 Full Speed Interface
- Plug and Play – CCID support brings utmost mobility
- Smart Card Reader:
  - Supports ISO 7816 Class A, B and C (5 V, 3 V, 1.8 V) cards
  - Supports CAC (Common Access Card)
  - Supports J-LIS Card
  - Supports microprocessor cards with T=0 or T=1 protocol
  - Supports memory cards
  - Supports PPS (Protocol and Parameters Selection)
  - Features Short Circuit Protection
- Application Programming Interface:
  - Supports PC/SC
  - Supports CT-API (through wrapper on top of PC/SC)
- Supports Android™ 3.1 and later<sup>1</sup>
- Compliant with the following standards:
  - EN60950/IEC 60950
  - ISO 7816
  - EMV™ Level 1 (Contact)
  - PC/SC
  - CCID
  - CE
  - FCC
  - UL
  - RoHS 2
  - REACH
  - FIPS 201 (USA)
  - TAA (USA)
  - J-LIS (Japan)
  - VCCI (Japan)
  - KC (Korea)
  - Microsoft® WHQL

---

<sup>1</sup> Uses an ACS-defined Android Library



## 3.0. Supported Card Types

### 3.1. MCU Cards

ACR38U-I1 operates with ISO 7816 MCU card following either the T=0 or T=1 protocol. It also works with CAC cards, ideal for US PIV and PKI applications.

### 3.2. Memory-based Smart Cards

ACR38U-I1 works with several memory-based smart cards such as:


- Cards following the I2C bus protocol (free memory cards) with maximum 128 bytes page with capability, including:
  - Atmel®: AT24C01/02/04/08/16/32/64/128/256/512/1024
  - SGS-Thomson: ST14C02C, ST14C04C
  - Gemplus: GFM1K, GFM2K, GFM4K, GFM8K
- Cards with secure memory IC with password and authentication, including:
  - Atmel®: AT88SC153 and AT88SC1608
- Cards with intelligent 1 KB EEPROM with write-protect function, including:
  - Infineon®: SLE4418, SLE4428, SLE5518 and SLE5528
- Cards with intelligent 256-byte EEPROM with write-protect function, including:
  - Infineon®: SLE4432, SLE4442, SLE5532 and SLE5542
- Cards with '104' type EEPROM non-reloadable token counter cards, including:
  - Infineon®: SLE4406, SLE4436, SLE5536 and SLE6636
- Cards with Intelligent 416-bit EEPROM with internal PIN check, including:
  - Infineon®: SLE4404
- Cards with Security Logic with Application Zone(s), including:
  - Atmel®: AT88SC101, AT88SC102 and AT88SC1003



## 4.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Public Key Infrastructure
- Network Security
- Access Control
- Loyalty Program

## 5.0. Technical Specifications

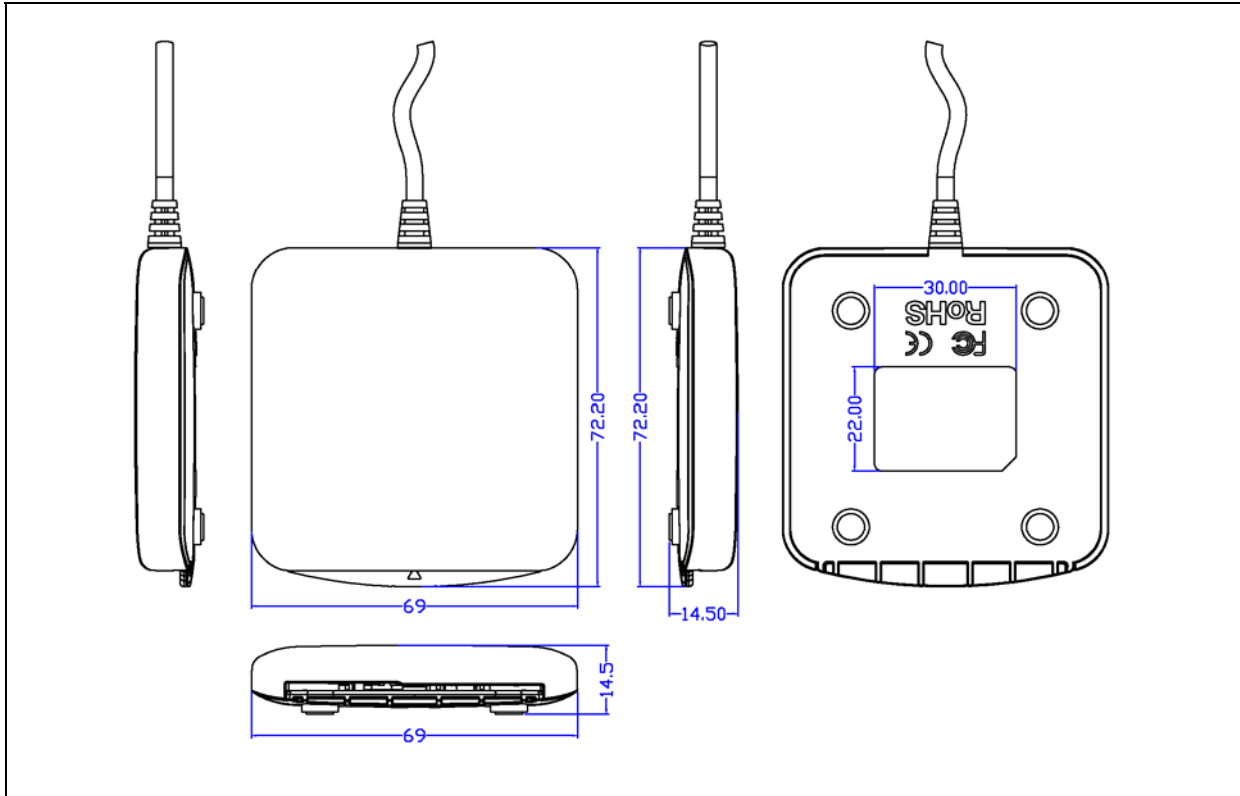

### Physical Characteristics

Dimensions ..... 72.2 mm (L) × 69.0 mm (W) × 14.5 mm (H)  
 Weight ..... 65 g (± 5 g allowance for cable)  
 Color ..... White

### USB Host Interface

Protocol ..... USB CCID  
 Type ..... Four Lines: +5 V, GND, D+ and D-  
 Connector Type ..... Standard Type A  
 Power Source ..... From USB port  
 Speed ..... USB Full Speed (12 Mbps)  
 Supply Voltage ..... 5 V  
 Cable length ..... 1.5 m fixed cable

### Contact Smart Card Interface

Number of Slots ..... 1 Full-sized Card Slot  
 Standard ..... ISO 7816 Parts 1-3, Class A, B, C (5 V, 3 V, 1.8 V)  
 Protocol ..... T=0; T=1; Memory Card Support  
 Supply Current ..... Max. 50 mA  
 Smart Card Read/Write Speed ..... 9.6 Kbps - 344 Kbps  
 Short Circuit Protection ..... (+5) V/GND on all pins  
 Clock Frequency ..... 4.0 MHz  
 Card Connector Type ..... ICC Slot 1: Contact  
 Card Insertion Cycles ..... Min. 100,000

### Built-in Peripheral

LED ..... Green

### Application Programming Interface

PC-linked Mode ..... PC/SC  
 ..... CT-API (through wrapper on top of PC/SC)

### Operating Conditions

Temperature ..... 0 °C - 50 °C  
 Humidity ..... Max. 90% (non-condensing)  
 MTBF ..... 500,000 hrs




**Certifications/Compliance**

EN60950/IEC 60950, ISO 7816, USB Full Speed, EMV™ Level 1 (Contact), PC/SC, CCID, CE, FCC, UL, RoHS 2, REACH, FIPS 201 (USA), TAA (USA), J-LIS (Japan), VCCI (Japan), KC (Korea), Microsoft® WHQL

**Device Driver Operating System Support**

Windows® CE, Windows® ME, Windows® 98, Windows® 2000, Windows® XP, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10  
Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2  
Linux®, Mac OS®, Android™ 3.1 and later

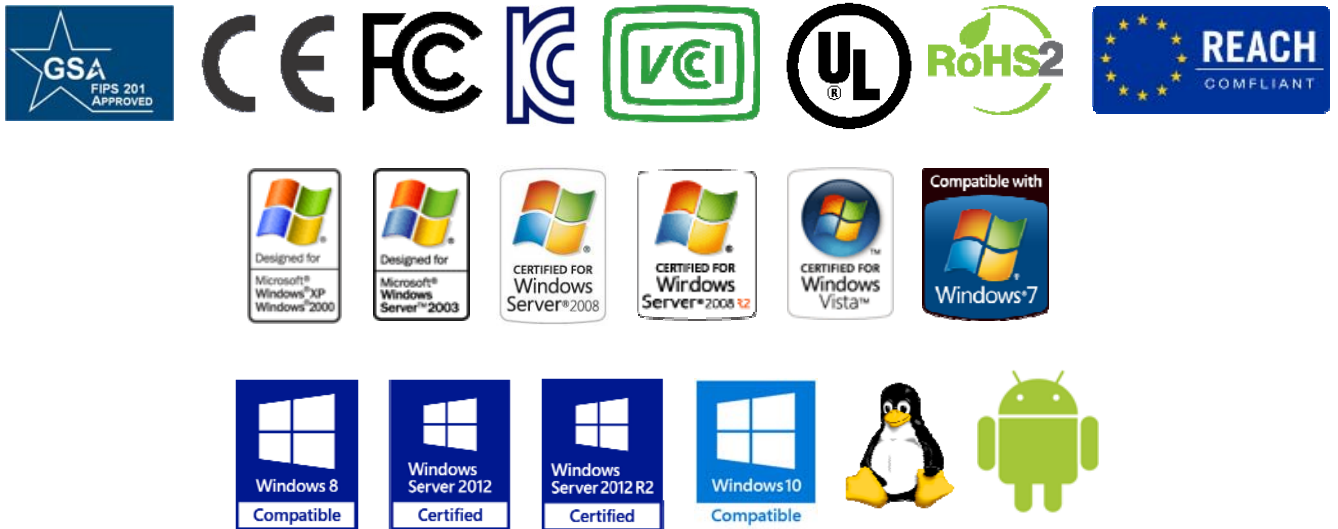

Android is a trademark of Google Inc.  
Atmel is registered trademark of Atmel Corporation or its subsidiaries, in the US and/or other countries.  
EMV is a registered trademark or trademark of EMVCo LLC in the United States and other countries.  
Infineon is a registered trademark of Infineon Technologies AG.  
Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries.  
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.