



Yuasa Technical Data Sheet

Yuasa YBX9019 - YBX9000 AGM Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 95Ah |
| Cold Cranking Amps (EN1) | 850A |

Dimensions

| | |
|--------|-------|
| Length | 353mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 25.6kg |
|-----------------------|--------|



Container Features

| | |
|------------------------|------------|
| Case Type | L5 DIN AGM |
| Terminal Type | T1 |
| Hold Down | B3 |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |

Technology

| | |
|---------------------------|----------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca VRLA AGM |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 5A |
| Performance Marking | W5-C2-V3-M3 |

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

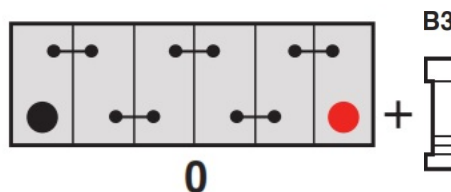

Battery Hold-down

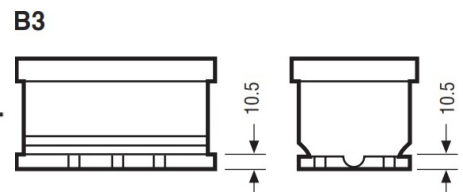

Data Sheet generated on 02/12/2020 - E&OE