


Heavy Volume

MenuMaster Commercial Microwave Model DEC18E2



Menumaster Commercial Microwave Model DEC18E2 | Heavy Volume

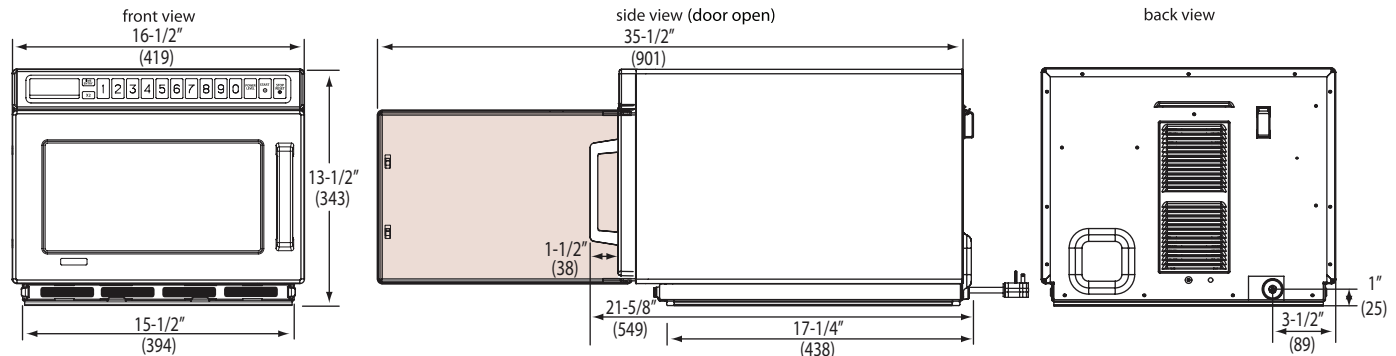

Installation Clearance: 7" (177.79) top and sides

Drawings available from KCL CADlog - techs@kclcad.com

Specification #:

Specifications

Model	DEC18E2	UPC Code 719881159317
Configuration	Countertop	
Control System	Touch	
Programmable Control Pads	10	
Settings Programmable	100	
Max. Cooking Time	60:00	
Power Levels	11	
Defrost	Yes, power level 2	
Time Entry Option	Yes	
Microwave Distribution	Double rotating antennas, top and bottom	
Magnetrons	2	
Display	LED	
Stackable	Yes	
Stage Cooking	Yes, 4	
Interior Light	Yes	
Door Opening	Grab and pull handle	
Signal	Adjustable, end of cycle	
Air Filter	Yes, removable, with clean filter reminder	
Multiple Portion Setting	Yes, up to 2 portions	
Exterior Dimensions	H 343 (13 1/2")	W 419 (16 1/2") D** 549 (21 5/8")
Cavity Dimensions	H 171 (6 3/4")	W 330 (13") D 305 (12")
Door Depth	940mm (37"), 90°+ door open	
Usable Cavity Space	17 liter (.6 cubic ft.)	
Exterior Finish	Stainless steel	
Interior Finish	Stainless steel with sealed-in ceramic shelf	
Power Consumption	2900 W, 12.6 A	
Power Output*	1800 W* Microwave	
Power Source	230V, 50 Hz, 16 A single phase	
Plug Configuration / Cord	CEE 7/7 "Schuko" 1.7m (5' 6")	
Frequency	2450 MHz	
Product Weight	31 kg (68 lbs.)	
Ship weight (approx.)	34 kg (74 lbs.)	
Shipping Carton Size	L 625 (24 5/8")	W 556 (21 7/8") D 473 (18 5/8")

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit and include a temperature reading. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1800 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. Heavy duty door shall have a tempered glass outer window and a grab and pull handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 17 liter (.6 cubic ft.) cavity shall accommodate a standard 152 mm (6") deep half-sized pan. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have a removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety.

Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (parts only) are covered.



AIA File #:

Measurements are in millimeters

* IEC 60 705 Tested

** Includes handle

