
## specifications



Project:

## RF6.UBR.1.SD

ReFlex Series, 1 Door (Solid), Underbench Fridge

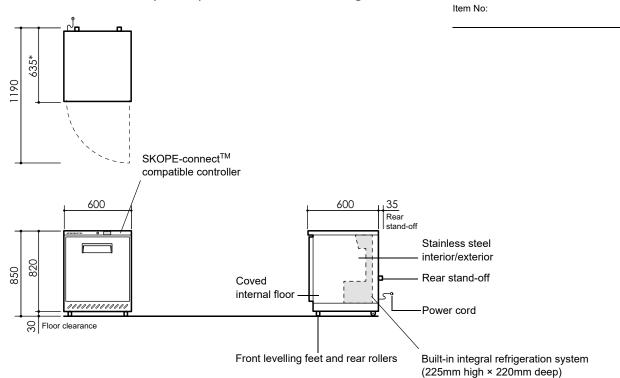

CABINET					
••••					
Door	1 × self-closing, lockable, reversible, solid swing door (hinged RH)				
Internal door opening	1 × door opening: 645mm high × 485mm wide				
Shelves	3 × shelves: 2 × adjustable height and 1 × floor mounted.				
	Top and middle adjustable height shelves: 480mm wide × 350mm deep				
	Bottom floor mounted shelf: 480mm wide × 180mm deep	DIMENSIC	SIONS		
Worktop	n.a.		External	Internal	
Material	304 AISI stainless steel interior and exterior	Height	850mm	655mm	
PERFORMANCE		Width	600mm	495mm	
Max. ambient temp.	30°C	Depth	635mm*	430mm	
Temperature range	1°C to 4°C (adjustable with SKOPE-connect 1°C to 15°C)	Floor area	0.38m <sup>2</sup>		
GEMS class	4M1	Weight	50kg		
GEMS energy consumption	1.30 kWh/24h	Gross volume	139 L		
GEMS annual running cost	\$143 p.a. (@ \$0.30/kWh)	Net volume	80 L		
ELECTRICAL		* Depth 635mm inclu	udes 35mm rear star	nd-off	
Electrical safety climate class	4	Dimensional tolerances			
Interior lighting	n.a.	Before installing this cabinet allow the following dimensional tolerances:			
Power cord	Supplied with 2.0m, 10 Amp plug and lead	Linear dimensions	Overall cabinet dimensions		
Power supply	220-240 Volts a.c. 50 Hz, single phase supply	Less than 1 metre	±5mm		
Current draw	1.0 Amps	More than 1 metre	-5mm to +10mm		
REFRIGERATION			Length of multiple cabinets At each joint At each end wall		
Controller	SCS Connect (SKOPE-connect <sup>™</sup> compatible)	Less than 1 metre	±5mm	+15mm	
Connectivity interface	Bluetooth <sup>®</sup> wireless technology	More than 1 metre	-5mm to +10mm	+15mm	
Refrigeration system	Built-in, integral, refrigeration system			-	
Refrigerant	R600a / 45g (natural refrigerant)	Ventilation requirements			
•	200 Watts	Тор	Not required		
Nominal capacity		Sides	50mm each side		
Heat rejection (Avg/peak)	55 Watts/60 Watts	Back Bottom	35mm (provided by rear stand-off) 30mm (provided by feet)		
Drainage	No plumbing required	Dottom	Somm (provided b	y ieelj	

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

