



## BACK-BAR DISPLAY COOLER 850mm

<b>Número de Artículo:</b>	ERH-L
<b>Fabricante:</b>	CORECO
<b>Familia:</b>	ERH-L




- Description
- Options
- Links
- Certifications
- Region

### ERH-L

- Anthracite plastic coated steel exterior
- Interior gray plastic-coated steel
- Double glass on folding frame with lock as standard

### FEATURES IN COMMON

- Designed for beverages and packaged products
- Steel wire shelves adjustable plastic height
- Hermetic compressor higher starting torque
- Forced draft evaporator system with anticorrosion coating
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Interior LEDs lighting
- Fan assisted, maintenance free condenser
- Isolation of polyurethane, density 40 Kg / m<sup>3</sup>, zero ODP and GWP
- Automatic evaporation of defrost water
- Operating temperature 32°C ambient
- Voltage 230V - 50 Hz

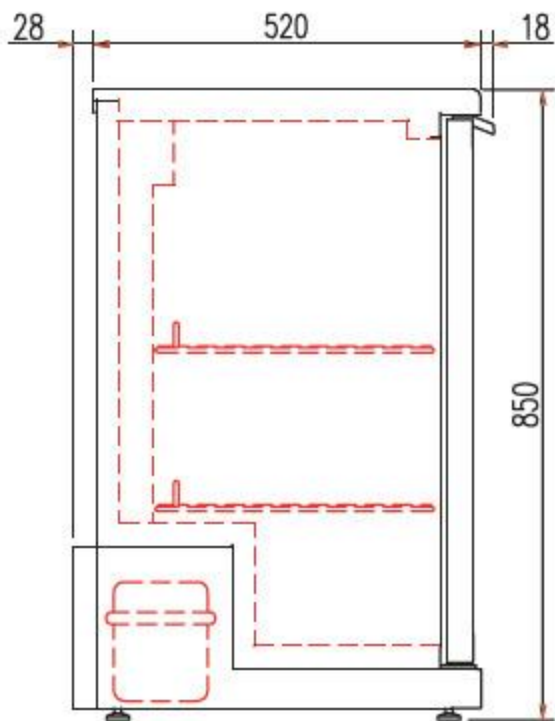

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	puertas abatibles hinged doors	puertas correderas sliding doors	estantes shelves	capacidad latas cans capacity (33 cl.)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
ERH-150-L	+2°C +8°C	620	850	520	1	0	2	150	230V-50Hz	R134a*	140	179
										R600a	205	161
ERH-250-L	+2°C +8°C	925	850	520	2	0	2	225	230V-50Hz	R134a*	304	321
										R600a	418	260
ERH-350-L	+2°C +8°C	1375	850	520	3	0	2	320	230V-50Hz	R134a*	330	330
										R600a	418	264
ERHS-250-L	+2°C +8°C	925	850	520	0	2	2	225	230V-50Hz	R134a*	304	321
										R600a	418	260
ERHS-350-L	+2°C +8°C	1375	850	520	0	2	2	320	230V-50Hz	R134a*	330	330
										R600a	418	264

\*opcional - optional