



CORECO


GLASS-FROSTER 140

Número de Artículo:	EC-140 / NR-140
Fabricante:	CORECO
Familia:	EC-140 / NR-140



- [Description](#)
- [Options](#)
- [Links](#)
- [Certifications](#)
- [Region](#)

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners, GN 1/1 capacity.
- Doors with self-closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI-304 stainless steel worktop
- 530x440 shelves made of plasticized steel wire, height adjustable
- Adjustable supports
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxy anticorrosion coating.
- Isolation of polyurethane, density 40 Kg / m³, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 32°C ambient

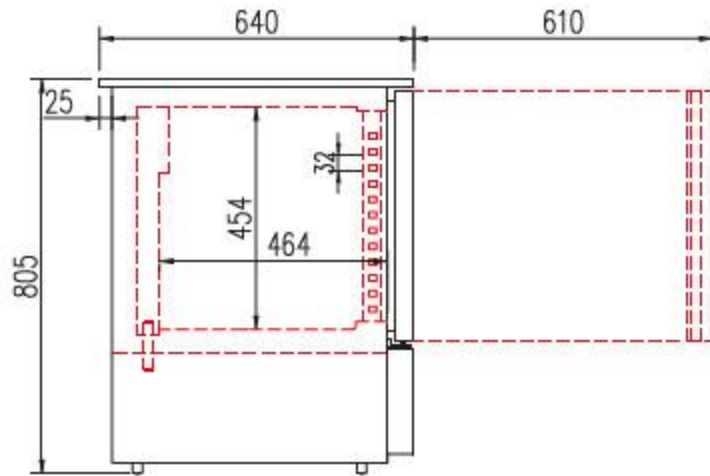

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	pares de guías slides sets	estantes shelves	cajas containers	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
EC-140	-5°C -15°C	645	805	640	2	2	0	125	230V-50Hz	R290	361	285
										R452A*	353	468
DP-140	-5°C -1°C	645	805	640	3	0	3	125	230V-50Hz	R134a*	178	229
										R290	190	185
NR-140	-2°C +8°C	645	805	640	2	2	0	125	230V-50Hz	R134a*	178	208
										R290	190	164

*opcional - optional